



Cube-3d

3D Software

User Manual



Contents

1. Software introduction	5
1.1. System requirements	5
1.2. Graphic card usage	6
1.3. Cube-3d modules.....	6
2. GUI (<i>Graphical User Interface</i>) walkthrough	8
2.1. Welcome screen	8
2.2. Viewer and live command window	8
3. Preparation of photogrammetric data (PH)	10
3.1. Option settings (PH, S).....	11
3.2. License details (PH, S)	13
4. Processing (PH)	14
4.1. Setting flying height.....	14
4.2. GCP setting up	16
4.3. Uploading images with saved metadata (PH)	19
4.3.1. Uploading images with external telemetry (PH)	21
4.3.2. Commands for images (PH)	23
4.3.3. Advanced Explanation on Coordinate Systems (PH, S)	23
4.4. Bundle adjustment (PH)	24
4.4.1. Bundle Adjustment troubleshooting	25
4.5. Orientation (geo-referencing) (PH)	26
4.5.1. Orientate with telemetry data.....	26
4.5.2. Orientate with GCP	27
4.5.3. Automatic orientation	29
4.5.4. Semiautomatic orientation.....	30
4.5.5. Troubleshooting with orientation	34
4.5.6. Orientation of unknown dataset	34
4.6. Advanced functionalities (PH)	35
4.6.1. Export camera parameters and undistorted images.....	35
4.6.2. Export undistorted images	35
4.7. Reconstruction (PH).....	36
5. Point clouds registration (S)	38
5.1. Manual registration (S).....	38
5.2. Automatic registration (ICP) (S).....	40
6. Point cloud manipulation (PH, S).....	42

6.1.	Point rendering (PH, S)	43
6.2.	Point snapping (PH, S)	43
6.3.	Cube-3d viewer (PH, S)	44
6.4.	Point selection (PH, S)	46
6.5.	Deleting points (PH, S)	47
6.6.	Manipulate points (PH, S)	47
6.7.	Calculating profile (PH, S)	49
6.8.	Point cloud merge (PH, S)	57
6.9.	Colormap (PH, S)	57
6.10.	Shading (PH, S)	59
6.11.	Delete (PH, S)	59
6.12.	Generate CAD points (PH, S)	59
6.13.	Reducing point clouds (PH, S)	61
6.14.	Saving point clouds (PH, S)	61
6.15.	Calculate point cloud colour from photogrammetry images (PH)	62
6.16.	Classification (PH, S)	63
6.17.	2Dviews (S)	68
6.18.	Point cloud with panoramic images (S)	72
7.	Mesh manipulation (PH, S)	75
7.1.	Calculate digital surface model (PH, S)	75
7.2.	Calculate texturized full 3D mesh (PH, S)	77
7.3.	Draping digital orthophoto (PH)	79
7.4.	Show texture (PH)	80
7.5.	Show grid (PH, S)	80
7.6.	Wire only (PH, S)	81
7.7.	Flatten (PH, S)	81
7.8.	Volume calculation (PH, S)	82
7.9.	Calculate contour lines (PH, S)	86
7.10.	CAD projections on mesh (PH, S)	87
7.11.	Delete (PH, S)	88
8.	Digital orthophoto (PH, S)	89
8.1.	Digital orthophoto calculation top-down (PH)	89
8.2.	Digital orthophoto corrections (PH)	91
8.3.	Cut orthophoto (PH, S)	93
8.4.	Merge orthophoto (PH, S)	93

8.5.	Calculate area (PH, S)	95
8.6.	Delete (PH, S).....	95
8.7.	Ortophoto from a pointcloud (PH, S)	95
9.	CAD Functionalities (PH, S)	96
9.1.	Preparing layers (PH, S)	96
9.2.	Select tool (PH, S)	96
9.3.	Draw point (PH, S)	96
9.4.	Draw line (PH, S).....	97
9.5.	Draw circle (PH, S)	98
9.6.	Measure tool (PH, S).....	99
9.7.	Edit tool (PH, S).....	99
9.8.	Photo-assisted CAD drawing tool (PH)	100
9.9.	Draw on planes (PH, S)	101
9.10.	Clipping with CAD (PH, S)	103
10.	Recorder function (PH, S)	105
11.	Reports (PH, S).....	107
11.1.	General report (PH)	107
11.2.	Measurement report (PH, S)	109

1. Software introduction

Cube-3d is a mapping and aerial image processing software solution. It lets you build professional 3D models from 2D images and geospatial data, captured using drones or other vessels and devices. Cube-3d offers photogrammetric processing (building geometry, geo-referencing, dense reconstruction) as well as 3D modelling and analysis of both Cube-3d-generated photogrammetric point clouds and third-party source data (las, LiDAR, CAD, etc). Create your own orthophotos (DOF), digital surface models (DSM) or calculate volumes and manage stockpiles in a fast and easy manner. An integrated reports wizard will help you put all that work together in a compact and presentable way.

Type of accessible data differs from project to project as should workflow. Two most popular use cases:

1. Drone flight & Mission Planner + Cube-3d Processing + Cube-3d Modelling and Analysis

Capture your own images (along with EXIF, GNSS, GPS RTK, etc. data for geo-referencing) and import them to Cube-3d for photogrammetric processing. Set parameters for bundle adjustment, orientation (geo-referencing) and reconstruction. The result will be a metric, geo-referenced, realistically coloured 3D point cloud that serves as a basis for all further calculation, modelling and analysis. Learn more about project preparation or jump to [License details](#).

2. Cube-3d Modelling and Analysis

Just finished with Processing? Importing third-party data, such as las point clouds, photogrammetric point clouds from other sources, LiDAR, etc. without having your own data for photogrammetric processing? No problem. This part lets you build, manipulate and customize point clouds, DSMs, DEMs, orthophotos, calculate volumes and profiles, contour lines, generate reports and export data in various formats for further CAD or any other use. Go to Modelling & Analysis.

This manual will help you get the most out of Cube-3d to achieve high-accuracy, survey-grade results in a professional and high-tech approach. Naturally, being a team of surveying professionals, we made sure that Cube-3d also supports data acquired with classical measuring methods and devices.

1.1. System requirements

Cube-3d runs on Windows 64-bit operating system. Processing runs on CPU, graphical interface runs on GPU. For best performance and speed make sure you have enough RAM (16GB+). See below for further specification requirements.

Minimum system requirements:

Windows 7, 8, 10; 64 bit

i5/i7

16 GB RAM

Nvidia GTX760

SSD 128 GB + HDD 500 GB

Recommended system requirements:

Windows 10; 64 bit

i7: <https://ark.intel.com/products/88967/Intel-Core-i7-6700HQ-Processor-6M-Cache-up-to-3-50-GHz>

16 - 32 GB RAM

Nvidia GTX960 or better

SSD 256 GB + HDD 1 TB

Advanced Professional Use (large datasets, full-frame cameras):

Windows 10; 64 bit

i9: https://ark.intel.com/products/123613/Intel-Core-i9-7900X-X-series-Processor-13_75M-Cache-up-to-4_30-GHz

64 - 128 GB RAM

Nvidia GTX960 or better

SSD 512 GB + HDD 1 TB


1.2. Graphic card usage

Using notebook PC: Power plan should be set to high performance

In case of additional graphics card: Dedicate the use of graphics card to Cube-3d.

Right click on *Cube-3d shortcut* -> *Run with graphics processors* -> *Change default graphics processor...*

When card's control panel pops up, go to **Manage 3D settings** -> **Program settings**. Check if Cube-3d is on the list of selected Program to customise. If not, click **Add** button and find **Cube-3d**. Click **Add Selected Program** and close *Control panel*.

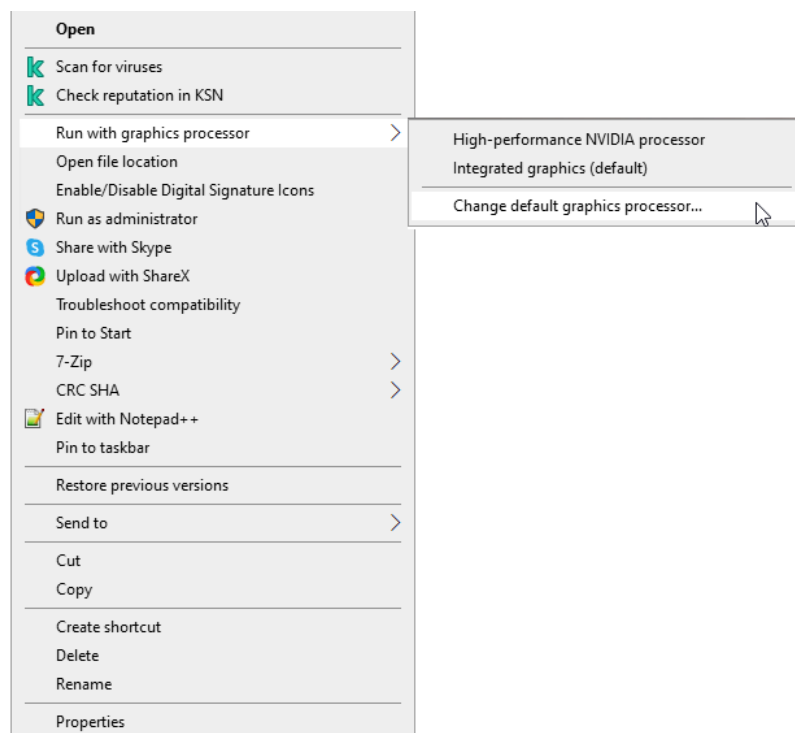

1.3. Cube-3d modules

Several modules of Cube-3d are available, subdivided as follows:

Tool	PHOTO	SCANNER	PRO
3D Model from images/video	✓		✓
GCP Orientation	✓		✓
Classification	✓	✓	✓
Point Cloud Registration		✓	✓
Mesh Calculation	✓	✓	✓
Ortophoto	✓	✓	✓
2Dviews Generation		✓	✓
CAD	✓	✓	✓
Volume Calculation	✓	✓	✓
Profiles Calculation	✓	✓	✓
Contour lines	✓	✓	✓
Video Recording	✓	✓	✓

The PHOTO module allows you to completely process photogrammetry data, from the images to a complete 3D model with analysis, The SCANNER module is designed to import, register and analyse point clouds from laser scanners. The functions presented within this manual are all available within the **PRO** version. Next to each section, you will find a legend representing the modules for which the described function is available.

Legend:


PH = PHOTO module

S = SCANNER module

2. GUI (Graphical User Interface) walkthrough

2.1. Welcome screen

Opening Cube-3d brings us to a welcome screen with a couple of options to start our project; **New project**, **Open** an existing project, or select from **recent projects** list. Other buttons remain disabled as no data is loaded in the app.

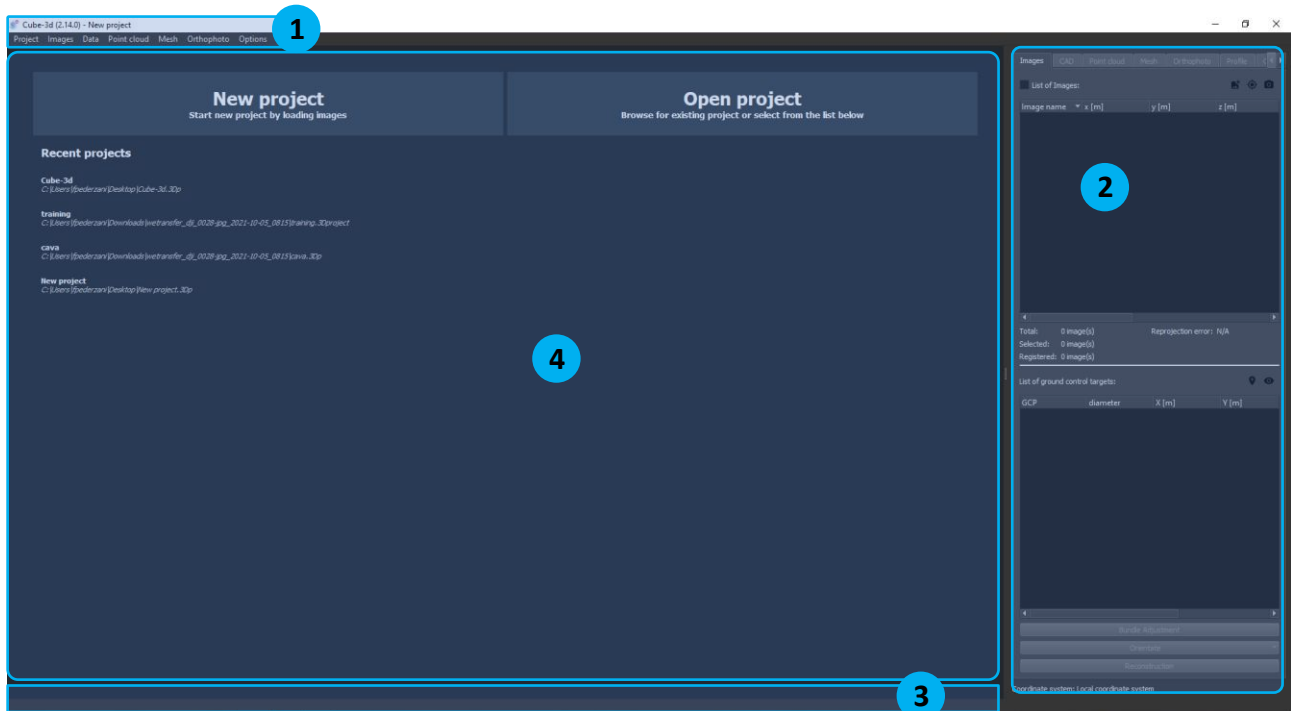


Graphical user interface of Cube-3d consists of four fundamental sections with tools, advanced options, guidelines and information for data processing:


1. **Toolbar** is the upper left part that provides us with all main options
2. **Working Panel** is located on the right side containing seven tabs, each giving us basic and advanced tab related tools. Tabs unlock as we move through processing to point cloud, modelling, Orthophoto, etc. Some menus, as well as some functions are locked due to either lack of data or because we tried to skip some of the processes.
3. **Live Command Window** is located on the lower left part, providing us with live results of running functions: coordinates of marker's position, computed distances, etc.
4. **Viewer** is the central board for viewing images, and all of 2D or 3D data.

2.2. Viewer and live command window

Main Viewer screen and Live Command line provide an interactive graphical and numerical interfaces for you to control and work with models, results, pick points, monitor coordinates as you explore your 2D or 3D material. The easiest way to handle models in Cube-3d is using a mouse and its four operations. Left mouse click is, just like any other app, used for selecting (starting polygon selection). When selecting polygon, use left mouse button to determine its points and right mouse click to finish your selection. To rotate models, click and hold left mouse button. To zoom in or out use the scroll wheel. If you need to shift the selected angle of view at selected zoom, click scroller and use it like pan function. When viewing Orthophotos or Profiles use scroller to zoom and pan.



3D Rotate
Vertical
Navigation



Scroll Wheel to
Zoom in or Out



Pan
Function



Confirming
Closing
selection

3. Preparation of photogrammetric data (PH)

Prepare your project folder on your disk and copy your images of selected project from SD card into the folder. If your UAV supports telemetry, use that data. Depending on your UAV model, telemetry data are ascribed to images, or recorded into *.csv file.

The .csv file must also be added alongside images and consists of further data: enabled, index, longitude, latitude, altitude, date, time, yaw, pitch, roll, x Sigma, y Sigma, z Sigma, p Sigma, blur, and file name. Organization of data must be known but is to be specified as you wish. See below an example of generic telemetry file (use this option if your UAV type is not listed). It is recommended you save your ground control point coordinates (GCPs) .txt file into the same folder as your image files. GCP file should be organized in the following way: point name, x coordinate, y coordinate, z coordinate – space delimited. Be advised, it is highly recommended to make some map of GCP/validation points locations especially when large datasets are in use.

Example of GCP coordinate file:

2000	461826.497	101890.277	299.055
2002	461890.872	101944.218	306.204
2003	461912.476	101975.102	298.454
2004	461918.598	102038.315	298.804
2005	461924.782	102083.948	298.882
2006	461889.252	102029.085	297.492
2007	461862.244	101990.371	294.797
2008	461863.334	102042.424	294.880
2009	461828.060	102028.207	300.632
2010	461796.036	101953.868	299.634

Example of csv telemetry file:

1	Enabled;Index;Longitude;Latitude;Altitude;Date Time;Yaw;Pitch;Roll;xSigma;ySigma;zSigma;pSigma;Blur;FileName
2	1;0001;13.9583636602449;45.8337773528361;271.29;05.12.2015
	11:14:39.874;146.75;3.31;1.62;0.00731778655059028;0.00550090901579003;0.0127800625976558;0.0157206870078887;0.0045;F:\5.12.2015\120m_70\DCIM\100MSDCF\DSC00001.JPG
3	1;0002;13.9584470721282;45.8336518897466;271.253;05.12.2015
	11:14:40.674;162.75;3.37;1.68;0.00731368580129062;0.0054972720507539;0.0127718440328717;0.0157108242940974;0.00565;F:\5.12.2015\120m_70\DCIM\100MSDCF\DSC00002.JPG
4	1;0003;13.9584784645431;45.8335148563475;271.744;05.12.2015
	11:14:41.474;177.56;3.31;1.62;0.00730547739713155;0.00549181208709839;0.0127569588852516;0.0156929920665245;0.00392;F:\5.12.2015\120m_70\DCIM\100MSDCF\DSC00003.JPG
5	1;0004;13.9584659361907;45.8333702699896;272.749;05.12.2015
	11:14:42.314;188.4;3.31;1.74;0.00702281994643178;0.00547722557505166;0.0123923363414652;0.015260733927305;0.00532;F:\5.12.2015\120m_70\DCIM\100MSDCF\DSC00004.JPG
6	1;0005;13.9584281045896;45.8332299296499;274.225;05.12.2015
	11:14:43.154;192.07;3.31;1.74;0.00479061582680139;0.00540462764674866;0.00847230783199005;0.011132834320154;0.00585;F:\5.12.2015\120m_70\DCIM\100MSDCF\DSC00005.JPG
7	1;0006;13.958391200951;45.8331052934532;275.878;05.12.2015
	11:14:43.914;190.53;3.31;1.80;0.00478539444560216;0.0054018515344278;0.00847289796940811;0.0111296900226376;0.00417;F:\5.12.2015\120m_70\DCIM\100MSDCF\DSC00006.JPG
8	1;0007;13.958362663814;45.8329738996776;277.428;05.12.2015
	11:14:44.714;185.58;3.37;1.74;0.00477912125813941;0.00539444158370447;0.00846108740056501;0.0111144050672989;0.00617;F:\5.12.2015\120m_70\DCIM\100MSDCF\DSC00007.JPG
9	1;0008;13.958354030887;45.8328480387836;278.474;05.12.2015
	11:14:45.474;179.71;3.37;1.62;0.004773887304912;0.00538794951720968;0.0084504437753292;0.011009008643443;0.00556;F:\5.12.2015\120m_70\DCIM\100MSDCF\DSC00008.JPG

Example of .csv generic telemetry log file:

Standard log file for telemetry import:


File type: *.csv
Delimiter: semicolon [;]

Image name/ID	Longitude	Latitude	Altitude	Yaw	Pitch	Roll
DSC01762.JPG	34.841698	119.183754	230	146.75	3.31	1.62
DSC01763.JPG	34.841301	119.183754	229	162.75	3.37	1.68
DSC01764.JPG	34.840881	119.183762	230	177.56	3.31	1.62
DSC01765.JPG	34.840485	119.183754	230	188.4	3.31	1.74
DSC01766.JPG	34.840088	119.183762	229	192.07	3.31	1.74
DSC01767.JPG	34.839672	119.183754	230	190.53	3.31	1.80
DSC01768.JPG	34.839275	119.183762	229	185.58	3.37	1.74
DSC01769.JPG	34.838879	119.183762	230	179.71	3.37	1.62
DSC01770.JPG	34.838463	119.183762	230	172.85	3.31	1.68
DSC01771.JPG	34.838066	119.183762	229	166.39	3.31	1.74
DSC01772.JPG	34.83765	119.183762	230	161.6	3.31	1.85
DSC01773.JPG	34.837254	119.183769	229	159.01	3.37	1.85
DSC01774.JPG	34.836838	119.183769	230	157.79	3.42	1.85
DSC01775.JPG	34.836437	119.183769	229	157.45	3.37	1.85
DSC01776.JPG	34.83604	119.183769	230	157.43	3.37	1.85
DSC01777.JPG	34.835625	119.183769	230	157.88	3.37	1.85
DSC01778.JPG	34.835228	119.183777	230	157.48	3.37	1.85
DSC01779.JPG	34.834812	119.183769	230	156.64	3.37	1.85
DSC01780.JPG	34.834415	119.183769	229	155.85	3.37	1.85
DSC01781.JPG	34.834019	119.183777	230	154.99	3.37	1.85
DSC01782.JPG	34.833618	119.183777	230	155.07	3.37	1.80

3.1. Option settings (PH, S)


Start **Cube-3d** and set language. Click **Options -> Application settings** and select language and units- You have to restart application to assign applied changes. If select **Automatic machine deactivation**, after closing the software the machine will be automatically deactivated, letting the user to use the software a second computer without removing the license manually.

You can also set the number of decimal places shown in CAD measurements, up to a maximum of 5.

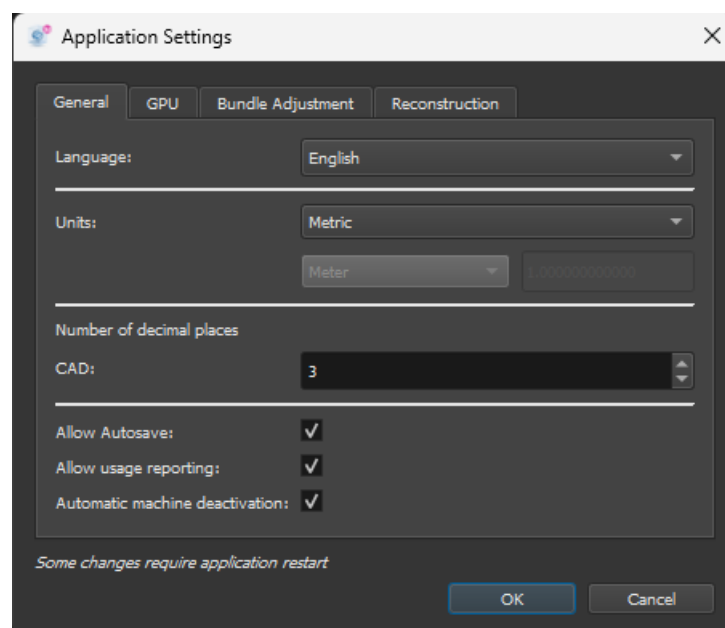

When imperial units are selected, you can further assign weather you want **International foot** or **US survey foot**. You can select **Other**. On the right, where by default is set 1.000000000000, type value of 1 unit in meters.

Next, click **Bundle Adjustment**.

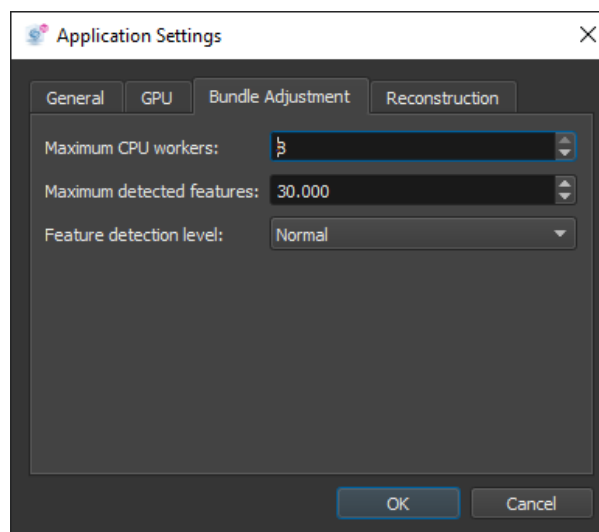

There you can assign:


Number of Maximum parallel threads depend on your computer CPU type. For default value Cube-3d checks number of available threads and directs them all. Decreasing threads is an option when RAM is insufficient to avoid plausible comp crash. It is imperative to keep sufficient level of RAM and processor. For example: if you have a good i7 processor with 4 cores – 8 threads and just 8GB of RAM we would advise you to lower the threads number to 4. This will avoid memory leaks during the processing.

Number of Maximum detected features, default number is 40.000;

Features correspond to so called tie points on each image further used for “sawing” them to strings and strings to block.

Feature detection level defines robustness of the matching step. Level of detection is inversely proportional to reliability and smoothness of detected points – features. Level of detection is also proportional to time of computation. Levels rise from *Normal*, *High* to *Ultra*.

Click **Reconstruction** to set **Number of maximum parallel threads**, where default value is 8. When all preferred values are assigned, click Ok to assign selected measures.

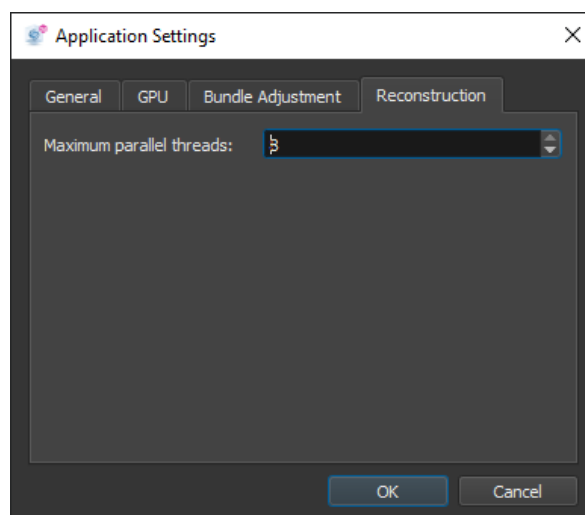

To save the changes for Language and Units you have to restart application to assign applied changes.


Changes of Bundle adjustment and Reconstruction settings are confirmed with selecting OK button - You don't need to restart application.

Note, that, if selected language is other than English, furtherly named command buttons and functionalities will be translated to selected language and will therefore defer from presented screenshots.

3.2. License details (PH, S)

All cube-3d licenses are floating licenses. Just go under **Help -> License** and click on **Deactivate machine**. This will allow you to use the same license on another machine. Is possible to check also the active modules.

In case you have a new code, click on **Change license key**.

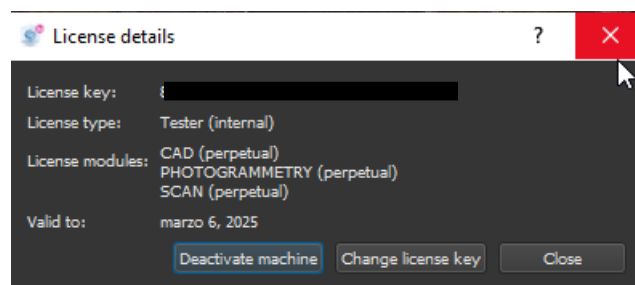

4. Processing (PH)

Aerotriangulation, Geo-referencing and Reconstruction

This part of Cube-3d empowers you to import your own dataset(s) containing images and geospatial data to generate metric, geo-referenced point clouds that serve as a basis for further modelling and analysis. When using unmanned or manned aircraft for the resulting data are overlapping aerial images along with image positions (exif gps, rTK, PPK, etc.) and/or GCPs to further improve geospatial orientation of the model. Therefore, it is advised to utilise flight mission planning software/app compatible with your UAV (pixhawk, GS Pro DJI, etc.). Flight path needs to be planned as to achieve image overlap that is paramount to successful matching and alignment of the images. Recommended overlap is 70% or more (For terrain with higher terrain difference increase it up to 80%).

Another important parameter of mission planning is [setting the right flying height](#). Its value depends on desired ground pixel size, resolution of used camera, and terrain characteristics. If your platform supports telemetry data, this is where it comes into play. Use it. To further improve geo-locating and referencing your project/model it is recommended to use ground control points. They need to be distributed across the surveyed site properly as to provide adequate spatial reference ([minimum 3 GCPs, recommended 9 GCPs per every 500m x 500m area/segment](#)). GCPs can be measured manually using GNSS devices (or any other device with GPS/GNSS capabilities) and can be in the form of natural/manmade features (building corners, rocks, manholes, shafts, etc.) or in the form of ground control targets. You can find the video description for all the procedure in the following video:

To recap: Place GCPs → Plan flight mission + UAV flight (capture images and positions) → Import to Cube-3d.

4.1. Setting flying height

To achieve great results, make sure you start with the correct settings right at the beginning. Higher overlap means more images and more images means longer processing time. The minimum overlap between images is 65% (front and side overlap). However in some cases (wide-angle cameras, high vegetation, uneven terrain, etc) it is safer to increase these values to 80%. Below are instructions on how to best prepare and set up your flight mission to get the best possible orthophoto with minimum processing time. In case you would like to calculate volumes, as well, additional side images will have to be captured – see the instructions for Volume calculations.

Standard settings for any drone, any camera:

- Camera angle nadir direction (vertically downward) - 90° angle
- Flying height from 40 - 150 m AGL (above ground level) - Usually 80 m
- Front Overlap (overlap in the flying way) 80%, Side overlap 75%.

Most drones automatically geotag the images based on drone GPS (usual accuracy 1,5 m) and you can orientate the model in Cube-3d based on that telemetry data. If you would like to achieve survey-grade accuracy (up to 4 cm), don't forget to set up GCPs before the flight and measure them with survey-grade RTK GNSS. In case you have a drone with RTK GPS with 1 cm accuracy you can use that data to orientate the model accurately without employing any GCPs.


Note: We always recommend using GCPs if the type of terrain allows for the placement. Cube-3d supports all combinations of geo-referencing data, including or excluding GPS inputs in the processing stage is also supported. Check the instructions how to set them correctly: GCP Setup

Tips and Tricks:


1. Start your mission from the highest point in relation to the terrain you are about to map. Most drones (DJI Phantom 4, Yuneec, DJI drones) fly missions in a single plane and don't automatically adjust their flying height to

the terrain characteristics. This can result in an insufficient image overlap (less than 60%) when capturing higher terrain points, high buildings, high trees, etc. in case you start the mission from lower positions.

- a. Best practice: Drone mission 80m 80% overlap 65m 70% overlap 95m 90% overlap

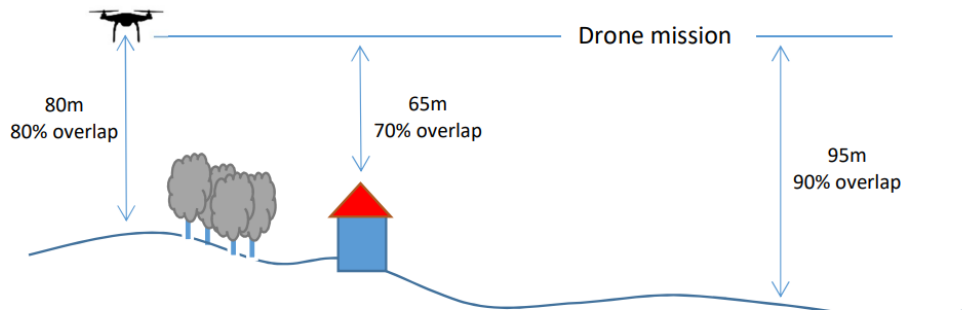

- b. Wrong starting point:

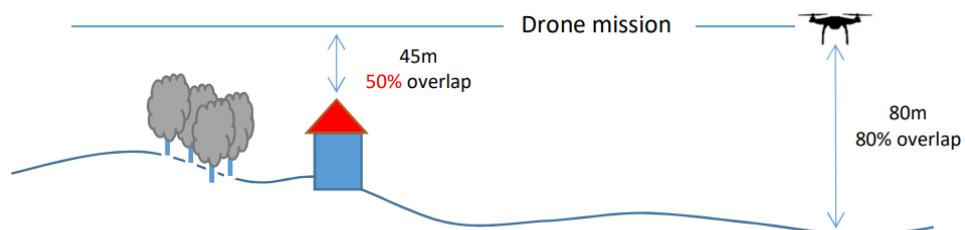

2. Lower flying height with better ground pixel resolution (GSD) does not always mean better results. In areas with high density of buildings, flying too low can result in the following:

- a. High buildings will not be ortho-projected in the digital orthophoto.



- b. Image stitching can be less than perfect if they are directly over a building.




To eliminate the over-the-building image stitching we advise you to have the whole building on a single image. First, perform your mission at 80 m AGL, then manually trigger a few nadir images from a higher AGL (120 m above the object, for example) to get the whole object in one image. That enables you to recalculate the area with - or/and around - the building.

4.2. GCP setting up

Ground control points orientate the model and improve the accuracy of calculated model. Minimum required number of GCPs to orientate the model is 3, however it is highly recommended you always use more than required. We advise you to set up a minimum of 10 GCPs per 10 acres (most common area size that can be mapped with a Drone on a single battery).

Use recognised targets (1. Stonex AutoDetect Target, 2. Checkbox Target, 3. AprilTags, 4. Custom) as GCPs, place them on the ground before flight and measure them with a GPS (GNSS) or total station.

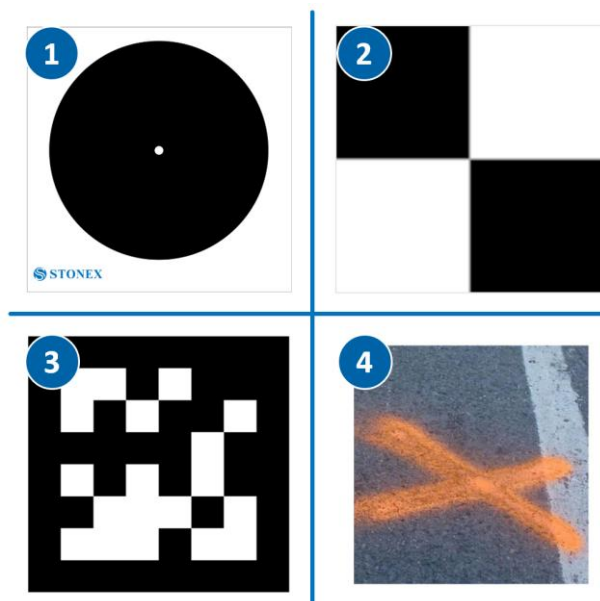

Use the advanced automatic orientation in Cube-3d.

Note: in case you are not using Cube-3d ground control target template you can measure any characteristic point in the area of interest, such as manholes, curbs, road markings, etc. That still enables you to do the orientation in Cube-3d but in this case semi-automatic.

Accuracy of the end model depends on:

- Camera type
- Flying height (image resolution)
- Number of GCPs and correct setup

Best practice GCP setup

Square areas GCPs should be spread across the whole area as uniformly as possible and should not be placed too close to the border of the area of interest.



In case of uneven (or rugged) terrain it is highly recommended to place GCPs on both lowest and highest points of your area of interest.



To achieve survey-grade accuracy, place your GCPs 50-100 m apart. Higher density of GCPs also means higher accuracy of end results.




Road/Railway example of GCP setup

To achieve survey-grade accuracy (up to 4 cm) we advise to set up GCPs in pairs every 50 – 100 m – one to the left and one to the right of the object of interest (road, railway, river bank, etc). This will provide you with a stable and consistent accuracy across the whole area – around the pairs as well as between them.

4.3. Uploading images with saved metadata (PH)

Start Cube-3d, select the button **New project** in the Viewer and select the project images in the folder. The same can be done via the Toolbar **Images** - > **Load images**.

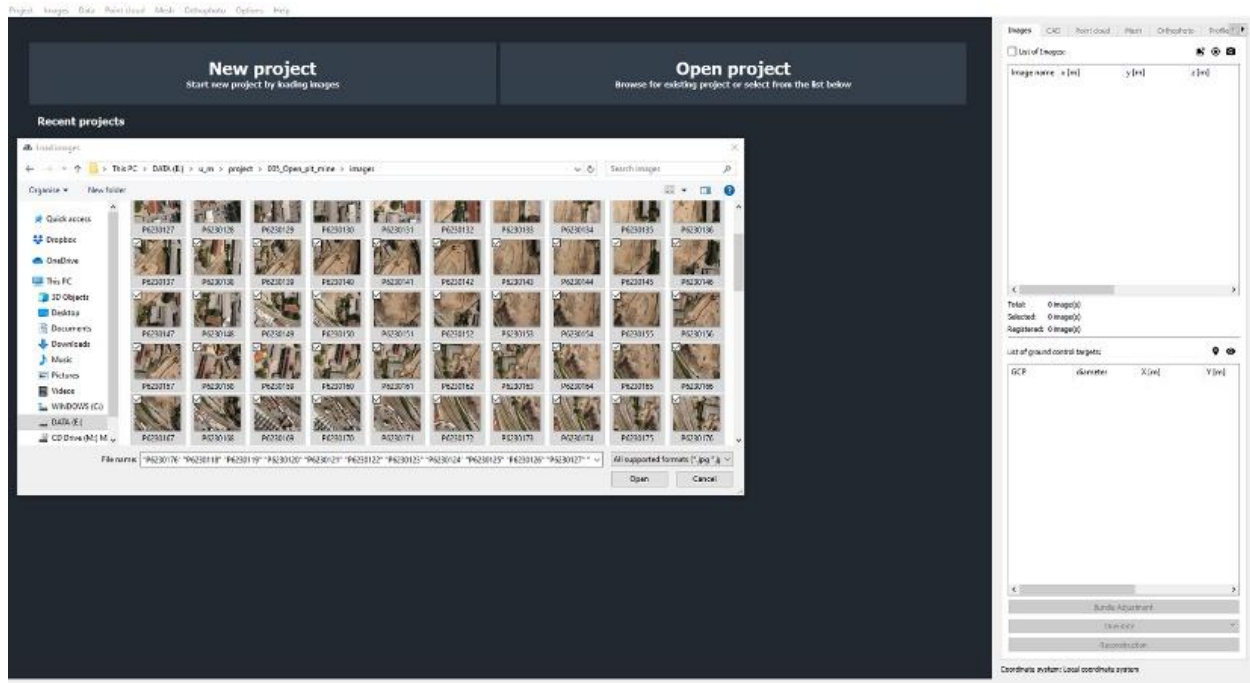



When images are uploaded, the telemetry importer window appears. For DJI drones, Yuneec drones and all other drones that write the GPS position of the images during flight use EXIF data.

For drones with a separate log file, use one of the following options:

- C-astral Bramor → *.csv
- MaVinci Sirius Pro → *.csv dati Exif (DJI Phantom 4, Inspire 1, eBee, Falcon 8,...)
- Other → *.csv

When images are imported, their telemetry is read. This opens a page where you enter the coordinate system of the images and the project. If the images already have this information the software reads it automatically, otherwise you can set it manually. You can select the horizontal coordinate system, and also the vertical coordinate system. Then select whether the height is ellipsoid or geodetic.

It is also possible to select previously created presets, changing from Custom to another system.

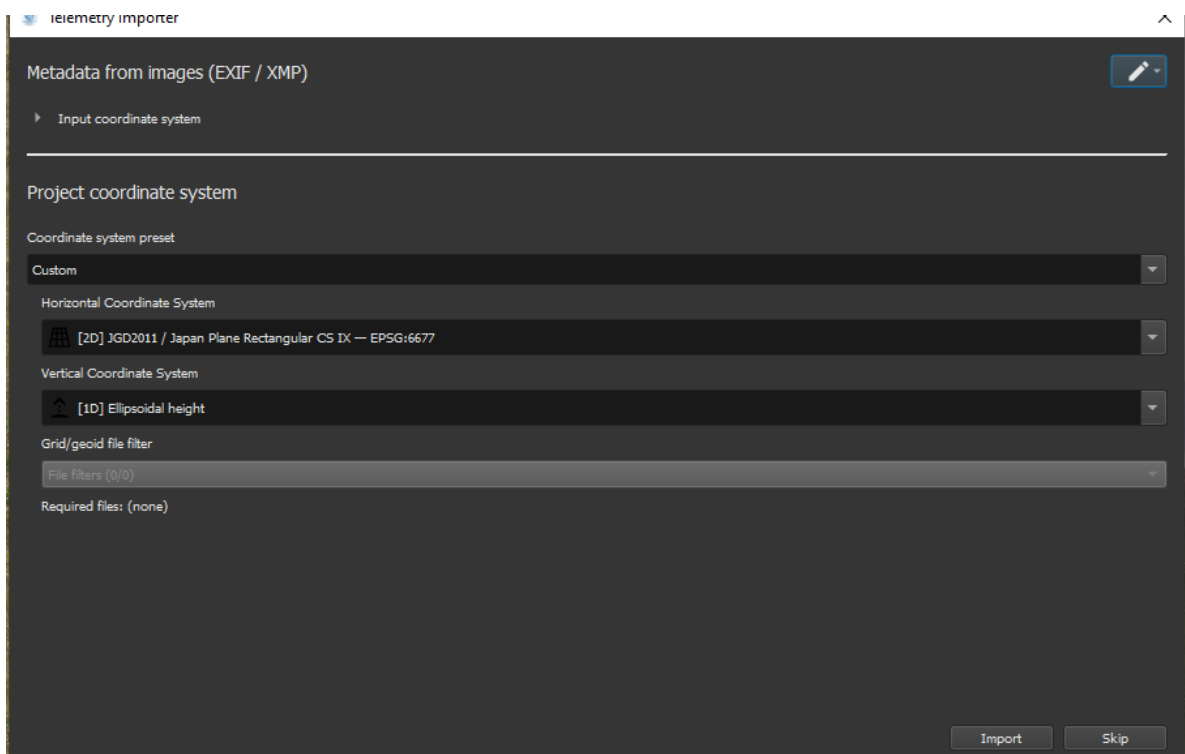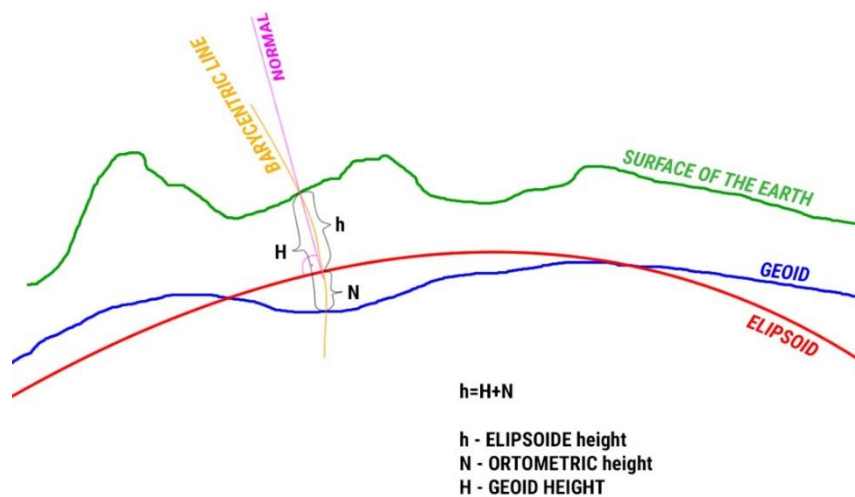

The telemetry will be read in automatically and a new window will open. The Telemetry window will open, presenting the imported data and their transformation into the project's coordinate system with their accuracy. You can manually **set the accuracy** and determine the **Camera to GCP offset** and **Flight Height**. If you imported the wrong log file, click on **Reimport**, to re-import the telemetry data or/and close. Camera positions are displayed in the Viewer after the data has been imported and processed.

Telemetry

Projection: JGD2011 / Japan Plane Rectangular CS IX + Baltic 1977 depth — EPSG:6677 + EPSG:5612

Image	Latitude [deg]	Longitude [deg]	Altitude [m]	Northing X [m]	Easting Y [m]	Depth D [m]	AGL [m]
DJI_0809.JPG	45.581865	9.346814	206.730	9634093.912	-3790645.889	-206.730	39.700
DJI_0810.JPG	45.581788	9.346999	207.530	9634090.675	-3790665.434	-207.530	39.900
DJI_0811.JPG	45.581721	9.347157	207.660	9634088.098	-3790682.228	-207.660	39.900
DJI_0812.JPG	45.581676	9.347270	207.870	9634085.922	-3790694.086	-207.870	39.700
DJI_0813.JPG	45.581592	9.347179	208.370	9634099.752	-3790694.691	-208.370	39.800
DJI_0814.JPG	45.581667	9.346992	208.620	9634103.202	-3790675.137	-208.620	39.600
DJI_0815.JPG	45.581735	9.346836	208.550	9634105.634	-3790658.413	-208.550	39.500
DJI_0816.JPG	45.581783	9.346724	208.280	9634107.526	-3790646.424	-208.280	39.500
DJI_0817.JPG	45.581690	9.346658	208.100	9634120.713	-3790649.614	-208.100	39.700
DJI_0818.JPG	45.581609	9.346838	208.430	9634118.232	-3790669.157	-208.430	40.000
DJI_0819.JPG	45.581541	9.346991	208.800	9634115.980	-3790685.706	-208.800	40.300
DJI_0820.JPG	45.581492	9.347104	208.920	9634114.276	-3790697.819	-208.920	40.000
DJI_0821.JPG	45.581408	9.347015	208.850	9634127.975	-3790698.661	-208.850	40.100

Manually set precision GPS/INS to camera offset Flight height Reimport Close

4.3.1. Uploading images with external telemetry (PH)

If the images you upload do not have telemetry values saved in the metadata, you can upload an external file with this information. Select the pen icon.



First set the data delimiter. Click where Semi-column [;] is displayed and select the delimiter sign. Now you have to assign the attributes of your log file to each column. Click on a tab at the top of each column, where none is displayed. Scroll down the list and click on the desired attribute to assign each column to the specified attribute.

Telemetry Importer

Metadata from external file

Input file:

Delimiter: ☒ Treat consecutive delimiters as one

1	2	3	4	5	6	7
Image name	X	Y	Z	Yaw	Pitch	Roll

☒ Geolocated coordinate system ☐ Local coordinate system

Project coordinate system

Coordinate system preset

Custom

Horizontal Coordinate System

[2D] JGD2011 / Japan Plane Rectangular CS IX — EPSG:6677

Vertical Coordinate System

[1D] Baltic 1977 depth [Baltic 1977] — EPSG:5612

Grid/geoid file filter

File filters (0/0)

Required files: (none)

See below for an example of what the file should look like to import telemetry data.

Standard log file for telemetry import:

File type: *.csv

Delimiter: semicolon [;]

Image name/ID	Longitude	Latitude	Altitude	Yaw	Pitch	Roll
DSC01762.JPG	34.841698	119.183754	230	146.75	3.31	1.62
DSC01763.JPG	34.841301	119.183754	229	162.75	3.37	1.68
DSC01764.JPG	34.840881	119.183762	230	177.56	3.31	1.62
DSC01765.JPG	34.840485	119.183754	230	188.4	3.31	1.74
DSC01766.JPG	34.840088	119.183762	229	192.07	3.31	1.74
DSC01767.JPG	34.839672	119.183754	230	190.53	3.31	1.80
DSC01768.JPG	34.839275	119.183762	229	185.58	3.37	1.74
DSC01769.JPG	34.838879	119.183762	230	179.71	3.37	1.62
DSC01770.JPG	34.838463	119.183762	230	172.85	3.31	1.68
DSC01771.JPG	34.838066	119.183762	229	166.39	3.31	1.74
DSC01772.JPG	34.83765	119.183762	230	161.6	3.31	1.85
DSC01773.JPG	34.837254	119.183769	229	159.01	3.37	1.85
DSC01774.JPG	34.836838	119.183769	230	157.79	3.42	1.85
DSC01775.JPG	34.836437	119.183769	229	157.45	3.37	1.85
DSC01776.JPG	34.83604	119.183769	230	157.43	3.37	1.85
DSC01777.JPG	34.835625	119.183769	230	157.88	3.37	1.85
DSC01778.JPG	34.835228	119.183777	230	157.48	3.37	1.85
DSC01779.JPG	34.834812	119.183769	230	156.64	3.37	1.85
DSC01780.JPG	34.834415	119.183769	229	155.85	3.37	1.85
DSC01781.JPG	34.834019	119.183777	230	154.99	3.37	1.85
DSC01782.JPG	34.833618	119.183777	230	155.07	3.37	1.80

It is then possible to select the coordinate systems of the images and the project. To search for the desired reference system or geoid, click on the datum name and type in the name or keywords for the search. Once all the data have been selected, click on **Import**.

The telemetry will be read in automatically and a new window will open. The Telemetry window will open, presenting the imported data and their transformation into the project's coordinate system with their accuracy. You can manually **set the accuracy** and determine the **Camera to GCP offset** and **Flight Height**. If you imported the wrong log file, click on **Reimport**, to re-import the telemetry data or/and close. Camera positions are displayed in the Viewer after the data has been imported and processed.

4.3.2. Commands for images (PH)


At the top left of the Viewer, you will see four buttons, **Images, Maps, Telemetry and Sparse point cloud** to view the data in your preferred mode. At this stage, Sparse point cloud is not available. When in telemetry mode, three buttons appear in the top right-hand corner.

The third button is for displaying image names. By default, all imported images are selected the number of images selected from those available is shown in the work panel. Use the **Deselect** button to exclude any number of images from the group setting. Use the left mouse button to draw the polygon surrounding the desired cameras. Close the polygon and confirm your selection with the right mouse button. The deselected images will change colour from blue to grey and in the list of images in the working panel, the deselected images will be unselected. If you want to include some of the deselected ones, click on the **Select** button to reselect them, or dock them in the image list. This has intrinsic value in two cases:


- When a dataset of more than 1000 images is processed, probably the most efficient way would be to process them by parts;
- You can easily de-select images that are not important for your project and would only increase the processing time of your project - panoramic images, images while lifting the drone to the exact height, etc.

4.3.3. Advanced Explanation on Coordinate Systems (PH, S)

When importing image telemetry data or ground control points, the data and project coordinate system must be selected. When assigning the preferred project coordinate system, as described in 4.3.1, you may be interested in the data displayed along the selected coordinate systems.

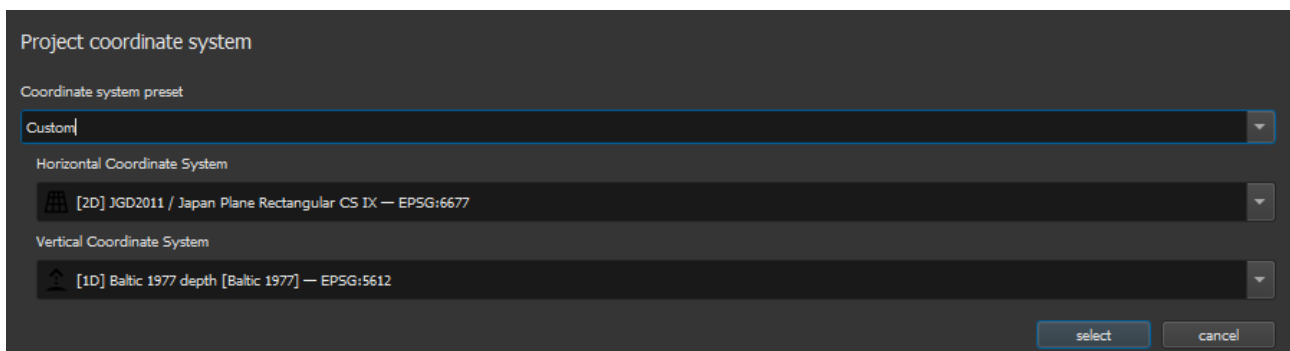


In the window you can select presets created by the software for different regions, load presets in PRJ/WKT formats or set up a custom system.

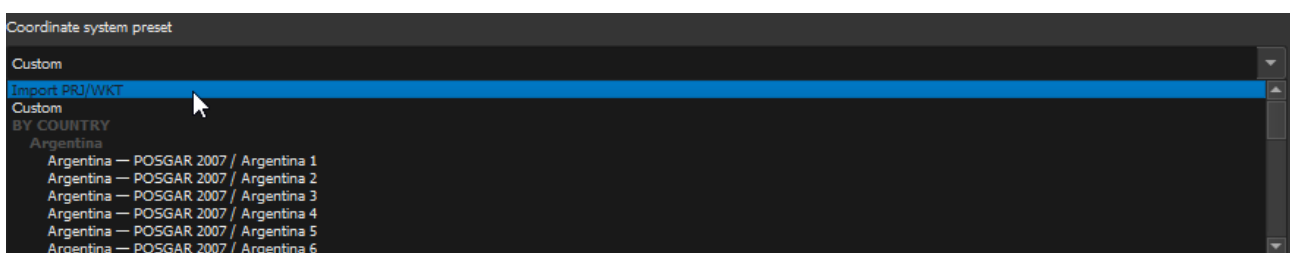

If you are working in custom mode, you can select either a horizontal or vertical system for your system. Click on the name and type in the system name or keywords to search for it.


Once selected, click **select**. The custom datasets created can be saved in different formats (WKT, PRJ, JSON) by clicking on the icon at the bottom right of the main software screen.



4.4. Bundle adjustment (PH)

If you have camera calibration parameters, click  and load camera parameters. Such data significantly improves the speed of the process of bundle adjustment and should be imported if available. For most popular drones (DJI Phantom 4, 4 PRO, Mavic, ...) the predefined parameters are already integrated in the software and you don't need to import it additionally. In case you are using other cameras, we advise you to calibrate your camera on your first project and use those parameters for future projects. Check out chapter: 4.3.4.3 *Export camera calibration* for detailed instructions.

Above **Bundle Adjustment** button **number of all images** is presented as a **number of used images**. Press **Bundle Adjustment** to calculate parameters of camera orientations.

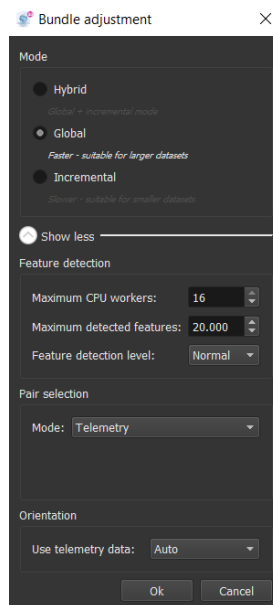

You need to select the Mode of adjustment:

- **Global** is faster method suitable for larger datasets – use it for default setting. In case you will not be satisfied with the number of matched images repeat the Bundle Adjustment calculation with Incremental approach.
- **Incremental** is slower but more stable – suitable for project where image texture or overlap isn't the best: High vegetation, bad overlap between images, blurry images... We advise you to use incremental approach for data sets up to 500 images (because of the processing time...)
- **Hybrid** is combination of global and incremental mode. It gives the best result using characteristics of both modes, but is also the slowest.

Click **Show more**, to select:

- **Maximum CPU workers**: The number of CPUs working together.
- **Maximum detected features**: The maximum number of features that will be extracted from the images.
- **Feature detection level**: The level of feature detection: Normal, High or Extreme.
- **Pair selection**: How to select and pair images:
 - o Telemetry: look at the drone's telemetry.
 - o Generic: try to choose images at random and try to pair them.


- Sequential: use in case of images extracted from video. Select images sequentially.
- All: Try to use all the previous methods.
- **Use telemetry data:** if you have drone telemetry you can orient the cloud with it.

Click **OK** to start Bundle adjustment. The processing time could be between a couple of minutes and up to several hours. It depends on the number of images and your CPU specifications (number of cores...)

Note: Try to save your project after every operation (Bundle Adjustment, Orientation and Reconstruction). It can be done through **Toolbar Project > Save project**. The latest version also has **autosave**, which makes that for you.

All images must be imported from a single folder to be processed as one project. Some of the drones start to write images in a second folder after 1000 created images and start once again with the image name 001.jpg (Phantom 4 Pro). In this case rename the images in second folder and copy all in one folder.

Once project is bundle adjusted, you can observe several functions in the viewer. As before, you can watch **images**, or click **telemetry**, to observe location and orientation (external orientation) of images. **Toggle text**, to view or not image names.

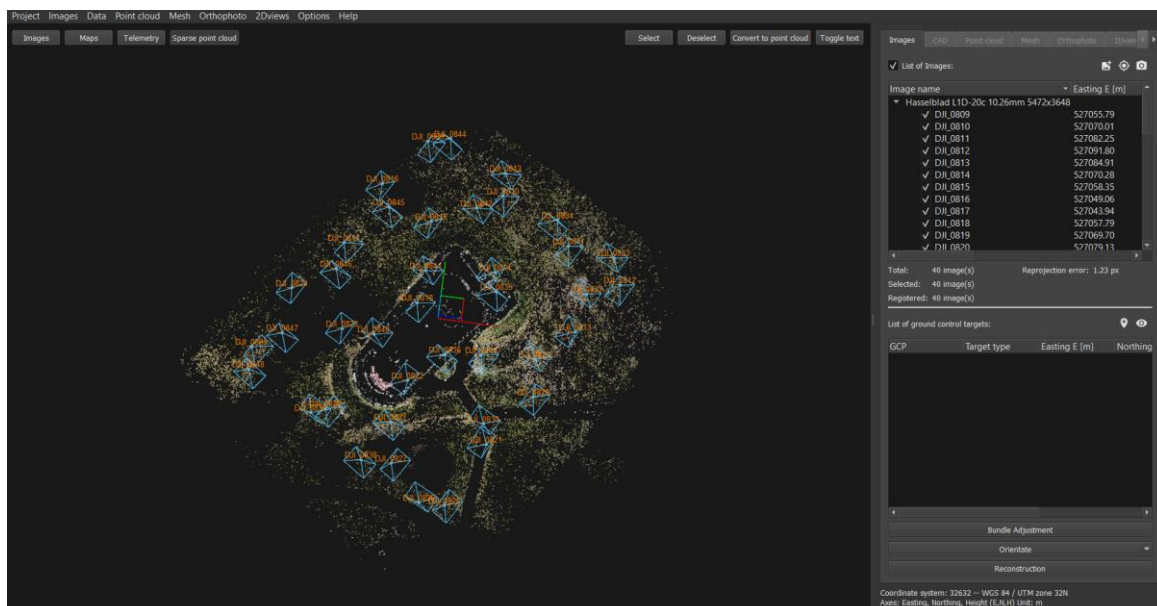

Click **sparse point cloud** to observe sparse point cloud beneath telemetry data. There, you can **toggle text**, **select** or **deselect** desired camera positions or click **convert to point cloud** that shifts your position in the working panel from Images to point cloud.

4.4.1. Bundle Adjustment troubleshooting

If bundle adjusted set of images is beneath your expectations, here are some guidance, that might help.

In case, that matches were found on only half of the selected images (*probably due to insufficient overlap, bad texture on images, high vegetation, images of water areas that are blurry*) you may get better results by:

- recomputed Bundle Adjustment using *Incremental* mode. If results aren't better, proceed;
- go to 3Dproject folder, and inside the folder with images manually delete folder named "Features". Then increase *Number of maximum detected features* to 80.000 in Cube-3d -> Options. Results should be better.

If the results are still insufficient: repeat the step 2. and increase also *Feature detection level* from *Normal* too *High* or *Ultra*.

After computation, set all changed parameters back to default, because made changes increase processing time and are unnecessary for standard datasets.


Default values of *Number of maximum detection features* is 40.000. *Feature detection level* is, by default set to *Normal*.

4.5. Orientation (geo-referencing) (PH)

To geo-reference a project, proceed with **Orientation**. Three options are available depending on your data type.

4.5.1. Orientate with telemetry data

In case of available and imported telemetry data, you can orientate images using just telemetry recordings, although it is recommended to use GCPs to achieve better accuracy. Remember, in the process of *Bundle adjustment* you selected whether you wish to orientate images or not.

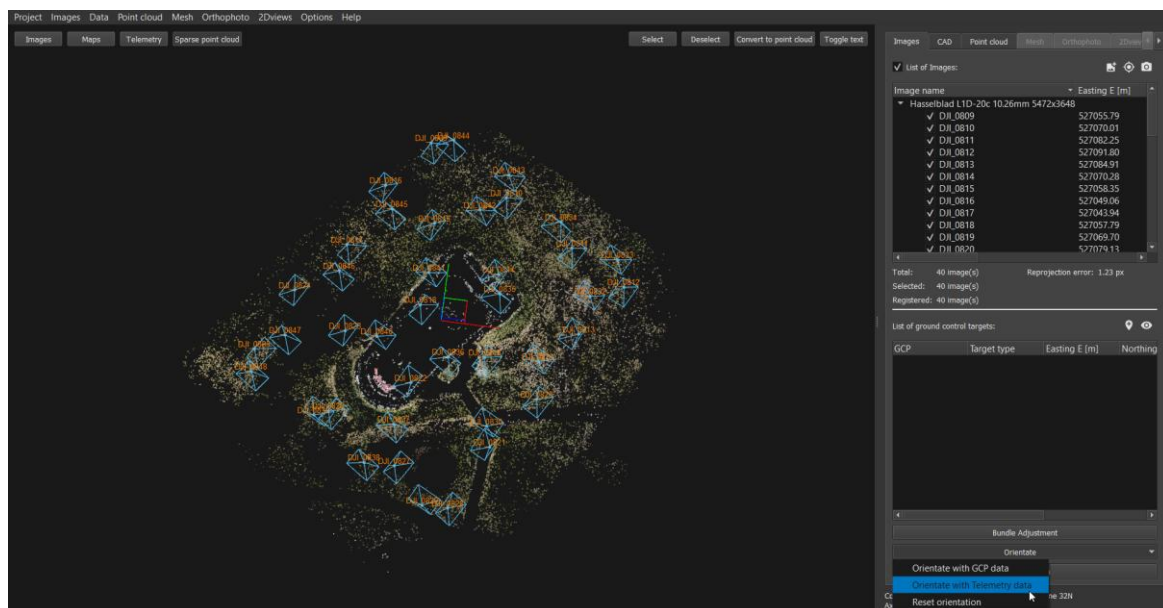


To proceed, click **Orientate with telemetry data** and follow the pop-up wizard. First you inspect location of images in assigned coordinate system. Some rows might be seen in grey colour as image's telemetry has error. To proceed, click **Next**.

Orientation			
	Easting E (m)	Northing N (m)	Height H (m)
DJI_0809.JPG	527056.16	5047649.98	163.32
DJI_0810.JPG	527070.64	5047641.52	164.12
DJI_0811.JPG	527082.96	5047634.12	164.25
DJI_0812.JPG	527091.86	5047629.12	164.46
DJI_0813.JPG	527084.78	5047619.79	164.96
DJI_0814.JPG	527070.18	5047628.12	165.21
DJI_0815.JPG	527057.98	5047635.57	165.14
DJI_0816.JPG	527049.15	5047640.82	164.87
DJI_0817.JPG	527044.10	5047630.52	164.69
DJI_0818.JPG	527058.16	5047621.57	165.02
DJI_0819.JPG	527070.15	5047614.08	165.39
DJI_0820.JPG	527078.96	5047608.65	165.52
DJI_0821.JPG	527072.10	5047599.27	165.45
DJI_0822.JPG	527057.29	5047608.04	165.54
DJI_0823.JPG	527045.40	5047615.27	165.34
DJI_0824.JPG	527036.54	5047620.51	165.07
DJI_0825.JPG	527031.43	5047610.14	164.80
DJI_0826.JPG	527045.57	5047601.25	164.90
DJI_0827.JPG	527057.75	5047593.83	164.87
DJI_0828.JPG	527066.48	5047588.54	164.77
DJI_0829.JPG	527062.52	5047588.58	164.74
DJI_0830.JPG	527071.49	5047602.88	164.55
DJI_0831.JPG	527078.78	5047614.69	164.52
DJI_0832.JPG	527086.29	5047626.86	164.52

Orientation summary window presents residuals of adjusted camera positions on all three axis and its spatial value. Click **Finish** to complete orientation. If some images have errors in telemetry, they appear as unregistered in the **List of images** in **Working panel**.

4.5.2. Orientate with GCP

In most cases, especially when telemetry data cannot be measured, or it isn't accurate enough (most UAVs carries GPS antenna with 1.5m accuracy), block of images is orientated using ground control points (GCPs). Position of GCPs are measured using GNSS services or by total stations.

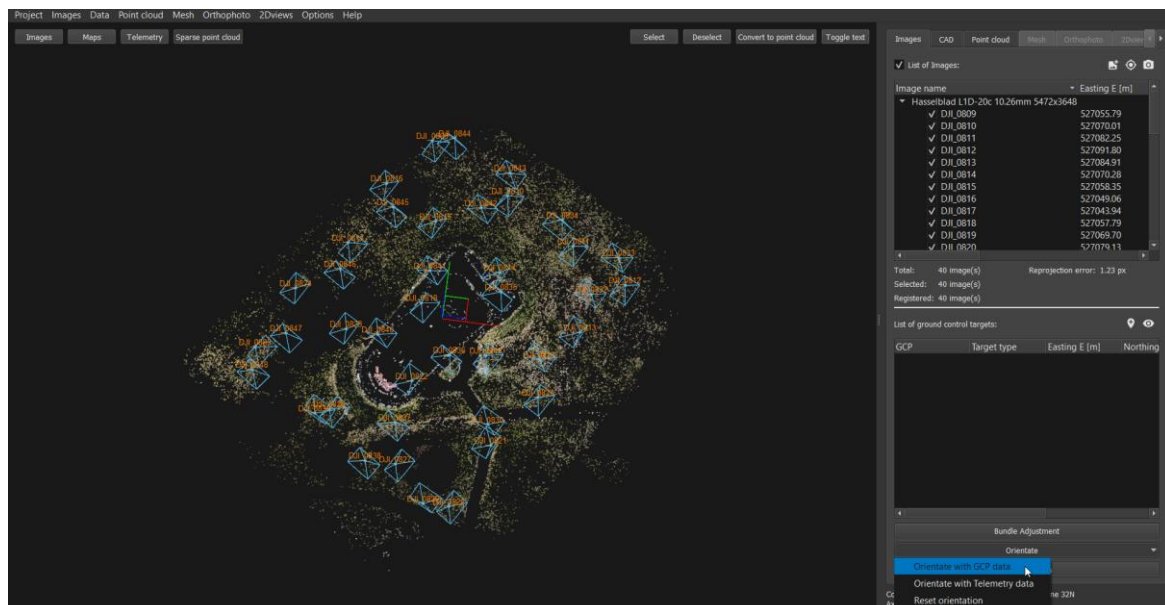

To proceed, click **Orientate with GCP** and follow the Orientation pop-up wizard. First, **select ground control points** (*.txt) file and click **import**. Define the file delimiter. You can change the type of data to be read in each field, and you can ignore some fields by putting NONE on the column. Finally, choose the reference system.


Ground Control Points Importer
✕

Would you like to import Ground Control Points for your dataset?

Input file: Browse

Delimiter: Comma [,] ✓ Treat consecutive delimiters as one

1	2	3	4
Name	Easting	Northing	Elevation

☒ Geolocated coordinate system
 ☐ Local coordinate system

Input coordinate system
 Horizontal Coordinate System
[3D] Same as project

Vertical Coordinate System

Project coordinate system

Coordinate system preset
Custom

Horizontal Coordinate System
[2D] JGD2011 / Japan Plane Rectangular CS IX — EPSG:6677

Vertical Coordinate System
[1D] Baltic 1977 depth [Baltic 1977] — EPSG:5612

Grid/geoid file filter
File filters (0/0)


Required files: (none)

Import
Cancel

In the next screen you can define the type of target used, its size and the method of use of the control point. Click on the field after the points name and select whether it is a ground control point (GCP) or a validation point:

- GCP - its reference coordinates are used in the orientation adjustment,
- Validation point – excluded from orientation adjustment and used for quality assessment at the end of the process.

In case you select the wrong coordinate system by importing the images into project, be reminded that you cannot change project coordinate system in this step. If you would like to correct this you need to start from the beginning (New project, ...) or use the second option – select: Local coordinate system. Further information about coordinate systems can be found in chapter [Bundle Adjustment troubleshooting](#).

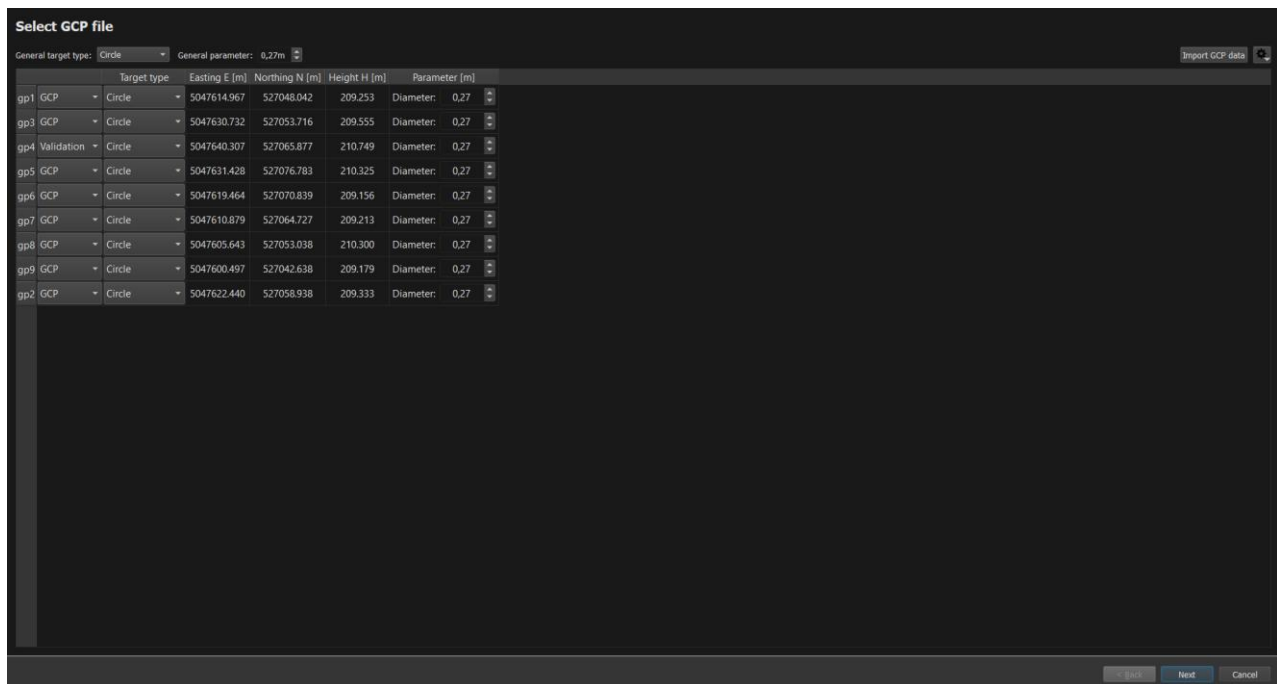

If you continue, you will end up in the screen for selecting control points within the images.




4.5.3. Automatic orientation

On the left of the pop-up window, **select image** with GCP. Use mouse scroller to zoom in or out. For automatic orientation a minimum of 3 GCPs need to be manually marked. **Mark** GCP with a **right mouse click**. Marked position is coloured in orange and ascribed a "?" as its name is not defined.



Continue by **selecting additional two** GCPs from other segments of your project area. When you select the third ground control point the automatic recognition for all other GCPs will start. Three marked GCPs remain orange coloured while automatically found GCPs are now coloured green and the names of all GCPs are identified.

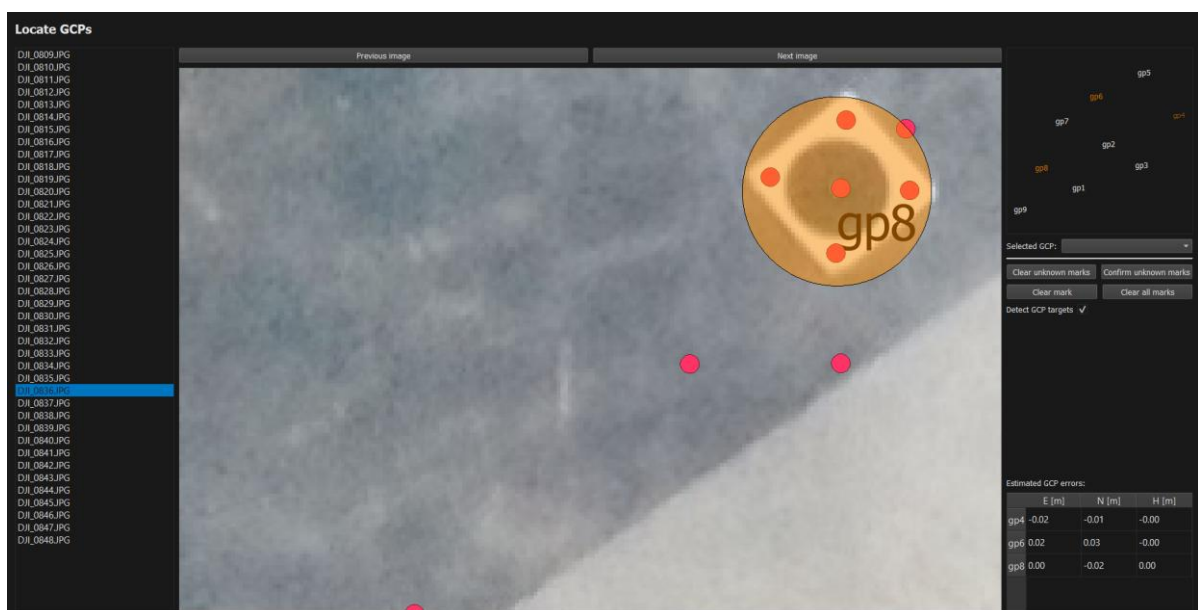

If you mismark the position of the ground control point, click *Clear all marks* button and reselect. Otherwise, click *Confirm unknown marks*. A useful tool for checking the appropriation of GCPs are their *residuals*. If displacements of selected points are high, you should check if you forgot to survey one of them (their position is missing in the file). Described method of Automatic orientation as furtherly described Troubleshooting with orientation in chapter [Troubleshooting with orientation](#).


4.5.4. Semiautomatic orientation

Use GCP Map and select first the name of the ground control point on GCP map with **left mouse click** (for example 2009) and **mark** its position **on image** with **left mouse click**. Marked position is coloured blue, and its id appears.

If you mismark the position, click *Clear mark* button and reselect. *Clear all marks* button clears all selected markers.



Select **two more** GCPs with a left mouse click (same as above). When you select the third ground control point the automatic recognition for all other GCPs will start. GCP are now coloured green and the names of all GCPs identified.

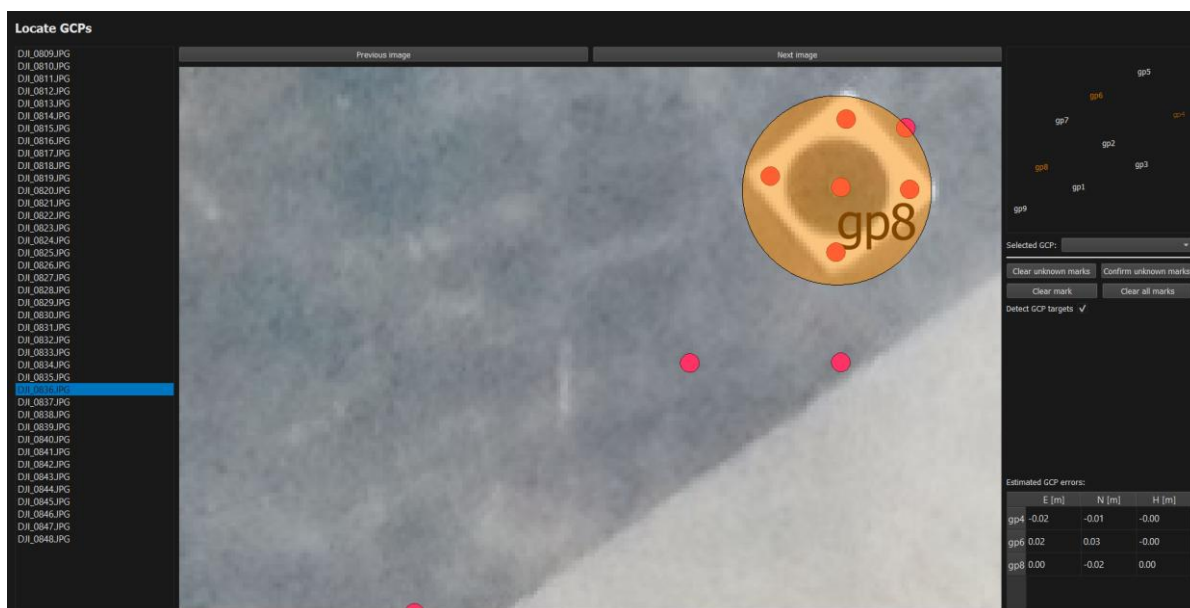


In the lower right corner appears the **residuals** of marked points. Residuals should be within 1m. Check if the automatic positions are calculated correctly - GCPs need to be coloured green. If not, correct them with manual selection. First, select the name of GCP on GCP map, then show the exact position of GCP map on an image. Use left mouse click.




In case you are using **STONEX GCP targets** (black dot on white plate) be sure to select the "Detect targets" and set the correct diameter for the black dot. The default value for diameter is 0,27m (standard Cube-3d target). In case you are using some detail points for orientation as **manholes, road marks, building corners...** deselect "Detect targets" click **next** to **continue with orientation**.

In the next step, we can see automatic recognition of ground control points (in case of Cube-3d targets). If the GCP is not recognised on a specific image, it is eliminated and coloured red. If you want to include this GCP into orientation, just double click the image and the red overlay will disappear. Several images can be marked or unmarked by ticking them in their upper left corner, where unticked square appears. Use Ctrl + A shortcut to select all target windows at once. You can also correct/realign the automatic measurement - left mouse click and move the centre of GCP to the green cross. Same approach can be used to correct the positions of GCPs that have been automatically detected but not measured perfectly because of the bad conditions during data acquisition.

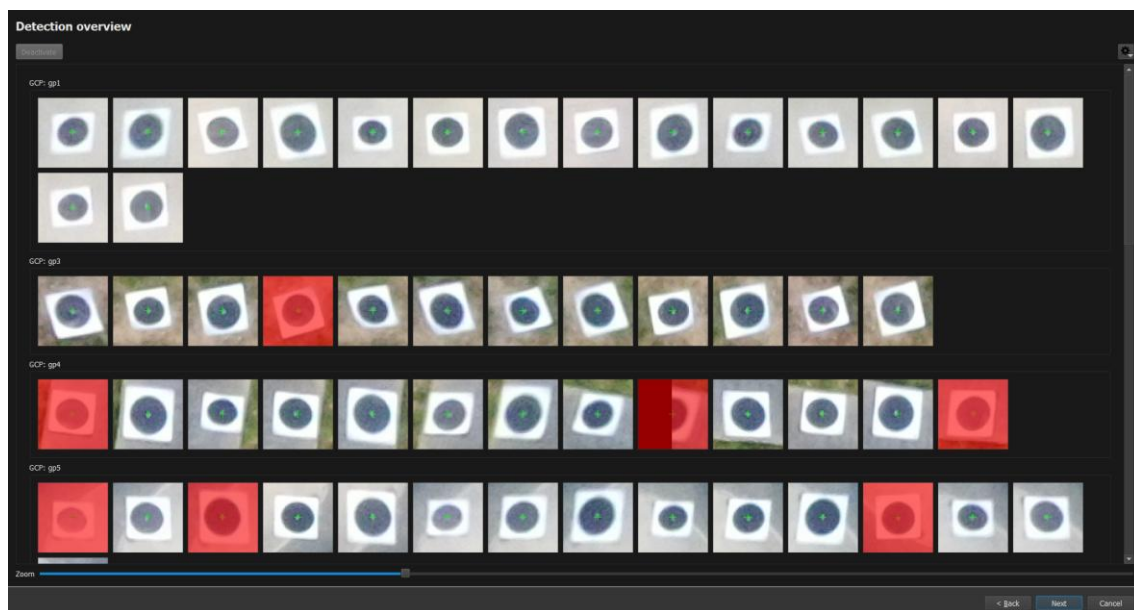

Faster approach for centring target is provided by the right mouse click. Put the mouse in the centre of the target and right mouse click for centration. Use mouse wheel or slide bar below to zoom in or out, which works for all target windows to realign easier.

If you are using the same dataset in numerous computations/projects it can be useful to **export GCP image positions** of centred targets. Click **tooth wheel button** in the upper right corner and click **export**. In case if you calculate the same project again next time you don't need to select and correct the GCP targets once again but just import the saved file and go to next step.

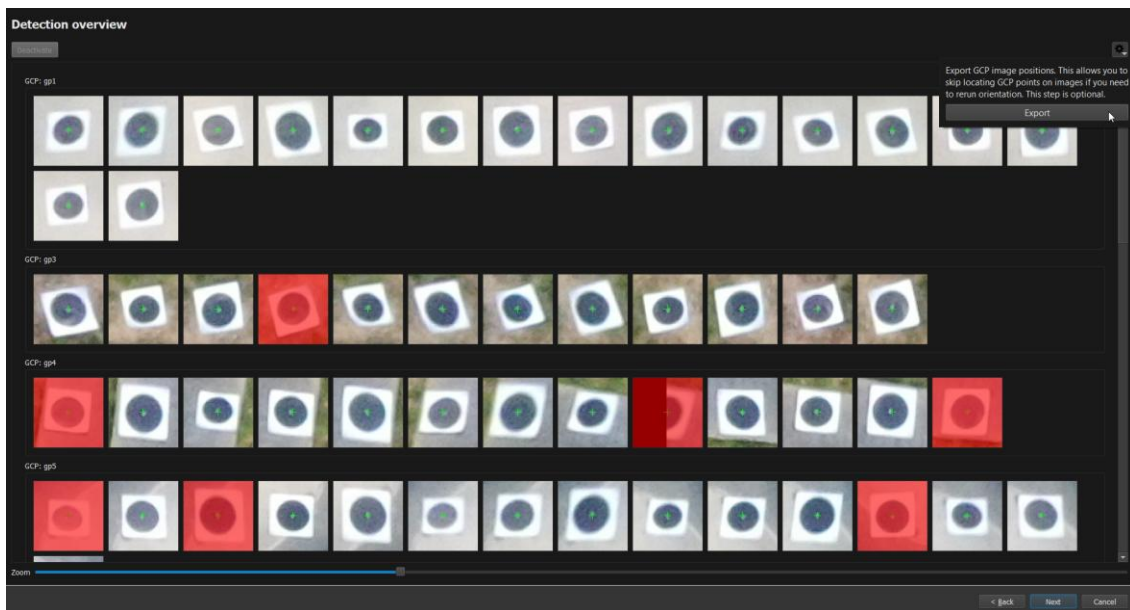

Click **Next**, to observe orientation's accuracy.

Orientation summary displays GCP errors – a sum of photogrammetric measurements and total station /GPS measurements. **Check GCPs accuracy** by **observing** their **residuals**. If residuals show high displacements of certain GCPs, go and recheck them. Click **back** button on the upper left corner and repeat the marking process. Click **Finish** when satisfied. Remember to save the project.

Orientation summary

Estimated error:

	Easting E [m]	Northing N [m]	Height H [m]	Total [m]
gp1	-0.022	0.019	-0.008	0.031
gp3	0.013	-0.000	0.004	0.014
gp4	-0.003	0.007	0.004	0.008
gp5	-0.005	-0.005	-0.001	0.007
gp6	0.009	0.014	0.004	0.017
gp7	-0.002	-0.001	0.007	0.007
gp8	-0.008	0.005	0.002	0.010
gp9	0.019	-0.008	0.011	0.023
gp2	0.003	-0.026	0.002	0.027

Buttons: < Back, Finish, Cancel

To check for independent accuracy quality, GCPs can be marked as Validation points that provide independent values to compare against GCP values. Points defined as Validation points get coloured grey.

Orientation summary				
Estimated error:				
	Easting E [m]	Northing N [m]	Height H [m]	Total [m]
gp1	-0.022	0.019	-0.006	0.030
gp3	0.010	0.004	0.002	0.011
gp4	-0.011	0.030	0.026	0.041
gp5	-0.004	0.001	0.003	0.005
gp6	0.006	0.011	-0.000	0.013
gp7	-0.005	-0.001	0.003	0.006
gp8	-0.015	0.007	0.017	0.024
gp9	0.017	-0.005	0.013	0.022
gp2	0.003	-0.026	0.006	0.027

In the *orientation summary*, you can observe adjusted accuracy presented with residuals. As four points are used as control points, orientation is computed based only on selected GCPs. As described above, residuals need to be low. Impact of their size can be observed on residuals of control points. In case of high values markings need to be corrected.

4.5.5. Troubleshooting with orientation

In case if automatically selected point markers mismatch - residuals show large coordinate differences, that exceed 1m limitation for presentable final centring, as presented below - you should click **clear all marks** and proceed semiautomatic orientation, as described above. Keep in mind that selected points need to be observed – have observed coordinates written in ***.txt**. If at the beginning of the orientation, at least one of selected markers is declared as control point, residuals will show misplacements.

If you would like to continue with the standard workflow, continue with the [Reconstruction](#).

4.5.6. Orientation of unknown dataset


Sometimes you need to process dataset of one of your co-workers. You weren't present during field work and you do not have any map of positions of GCPs. There are several ways to proceed:

- [Use Automatic orientation](#) method
- Select all GCPs as validation points and use [Semiautomatic orientation](#) method for GCPs you are shore of its position. Observe residuals from the list, and if for some GCP values are high, select it from the list or click on it in the map and click **clear mark**. It is time consuming process especially when processing large datasets. It is highly recommended to make and archive some map of GCP / validation point locations.

4.6. Advanced functionalities (PH)


4.6.1. Export camera parameters and undistorted images

If you would like to import results of Bundle Adjustment in any other photogrammetric software, you need to export camera parameters and undistorted images. Click **Data**, chose **export camera parameters**. Type preferred name of exported document or chose predetermined one and confirm.

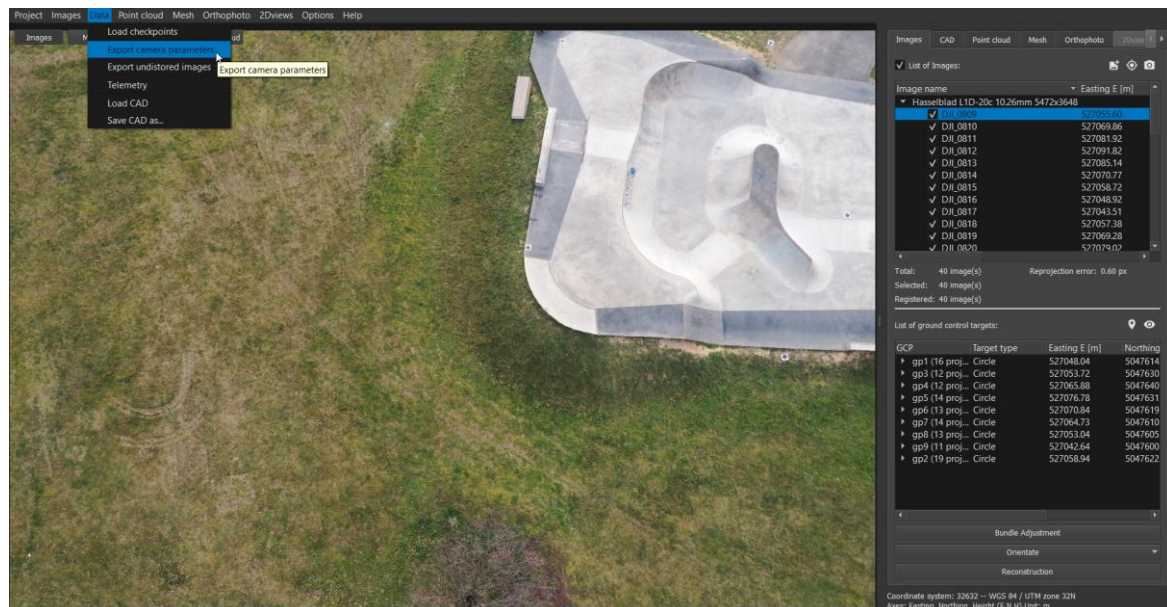


4.6.2. Export undistorted images

Click **Data** and chose **export undistorted images**. In the popup window assign path of directory and type in its name.

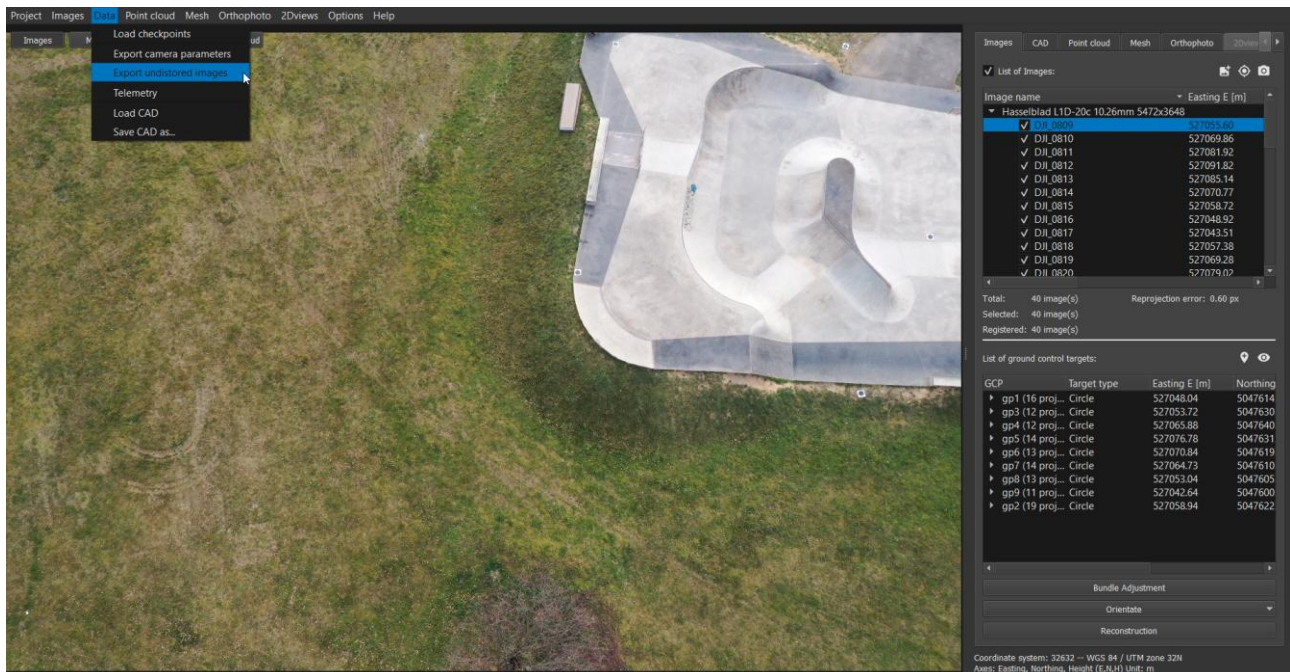

4.7. Reconstruction (PH)

When you are finished with orientation wizard the main window will appear. Next step is Reconstruction of dense point cloud. On image you can find the default values for Reconstruction step which offers you the most effective calculation (time VS results).

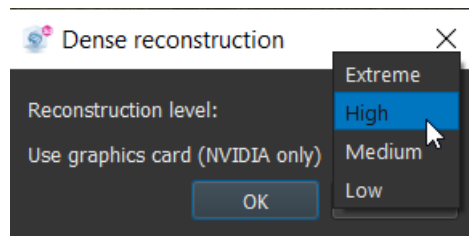

Click OK to start reconstruction.


Continuing each reconstruction parameter is described for more information.

Reconstruction level – there are 4 levels of reconstruction:

- Low,
- Medium,
- High,
- Extreme.

Use graphic card – Falg only if graphic card is installed in your device. Only NVIDIA supported.

As the reconstruction is in progress, the *Point cloud* tab unlocks in *Working panel*. In the *Viewer*, the progress bar displays the stage of completed processing. The predicted processing time is realistic after 7% of the process is computed.

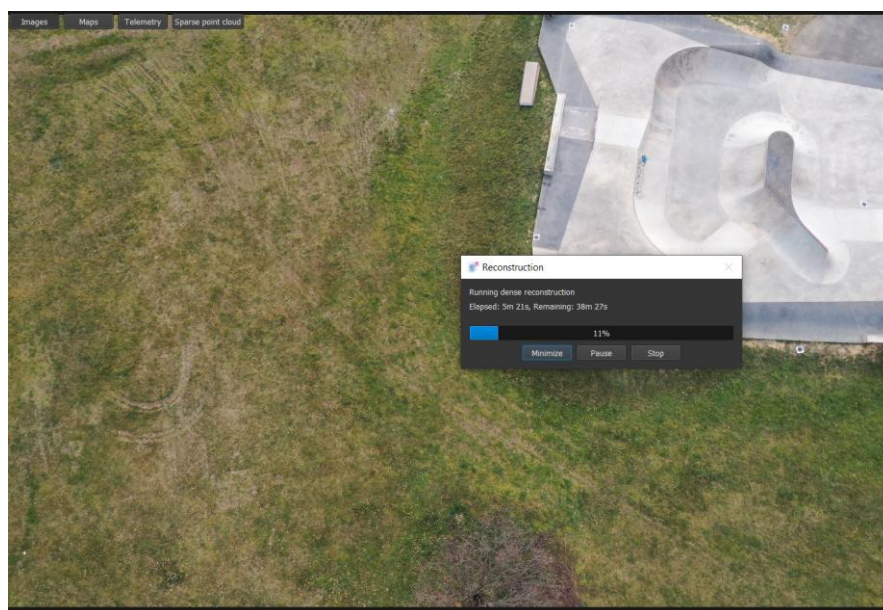


Reconstruction advances

As described in Option settings desired images can be chosen to reconstruct point cloud from. When all images are being orientated, point cloud can be reconstructed from only one selected image. Although you chose only one image, app runs reconstruction with all of overlapping images, with same detail of surface. Select preferred images and run **reconstruction**.

You can use select or deselect button or manually deselect images from the image list. Further assign desired level of reconstruction, number of overlapping images and possibility of optimization.

This function allows you to process the dense reconstruction for one project in two pairs (1st half and 2nd half) or calculate the dense reconstruction with a different level – for example: centered area with Extreme level, less important area on High or Medium level.


To see the effect, we selected point cloud (coloured purple) reconstructed from one selected image with its overlapping images selected amongst point cloud reconstructed from entire batch of images. Although selected image was from the first row of images, about 700.000 points were reconstructed.

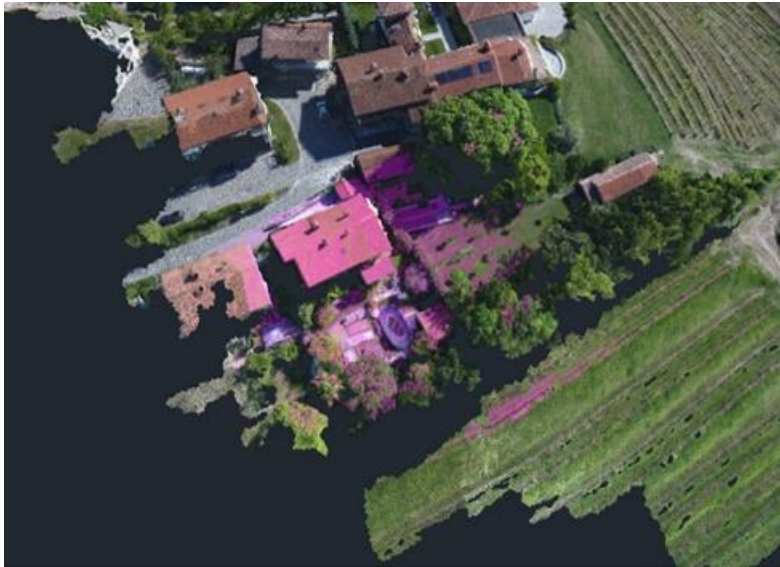


5. Point clouds registration (S)

5.1. Manual registration (S)


Import the point clouds you wish to register. Click on Point Cloud, then click on Load. Both point clouds will be displayed in the viewing area. Once loaded, click Manual Registration in the tools area.

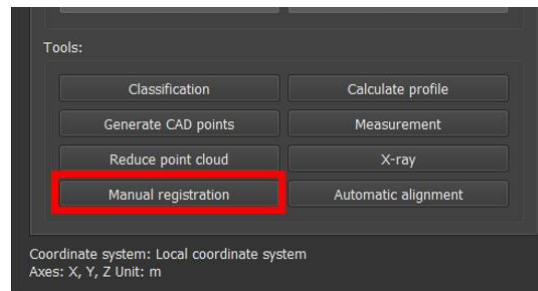

In the registration window, the two point clouds will be displayed side by side in two windows. On the left the one to be recorded, on the right the reference one. You can import a GCP co-ordinate file by clicking on the folder icon of both point clouds.

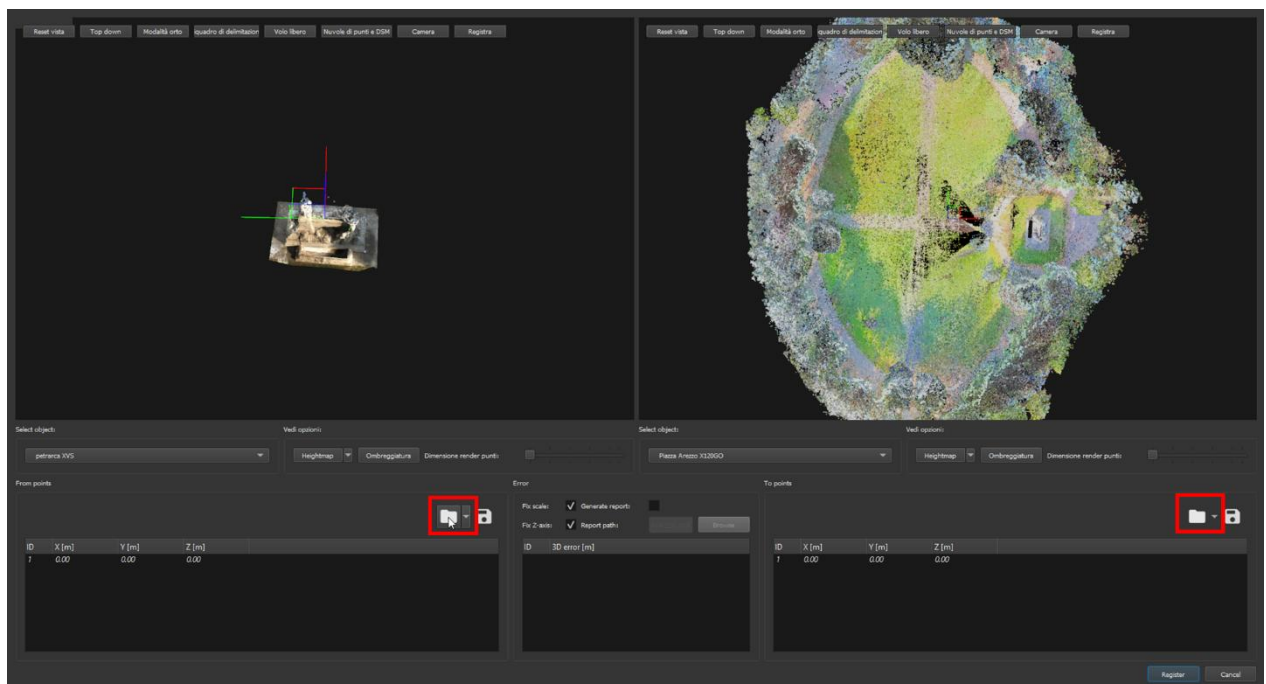

Under 'options' it is possible to switch between colour and other colour displays such as intensity or height scales, and it is also possible to increase the size of the dots.

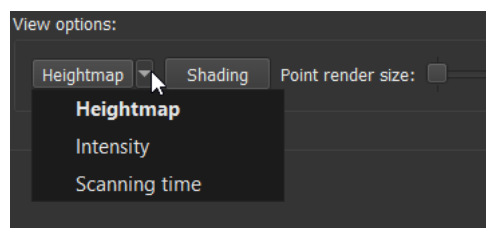


You can create matches manually if no GCPs have been collected or if you wish to add more. In the registration window, double-click on a point cloud to enlarge it. Navigate to a recognisable point in both point clouds, then click to create a new match. Two matching points must have the same name to be connected correctly.

You can also fix the Z-axis (fix z-axis) if the scans have the same levelling or fix the scale (fix scale).



In the central part you can see a preview of the errors. By marking Generate report you can save a report file with the residues. You can delete a point by clicking on the 'x' next to it. When finished, click Save.

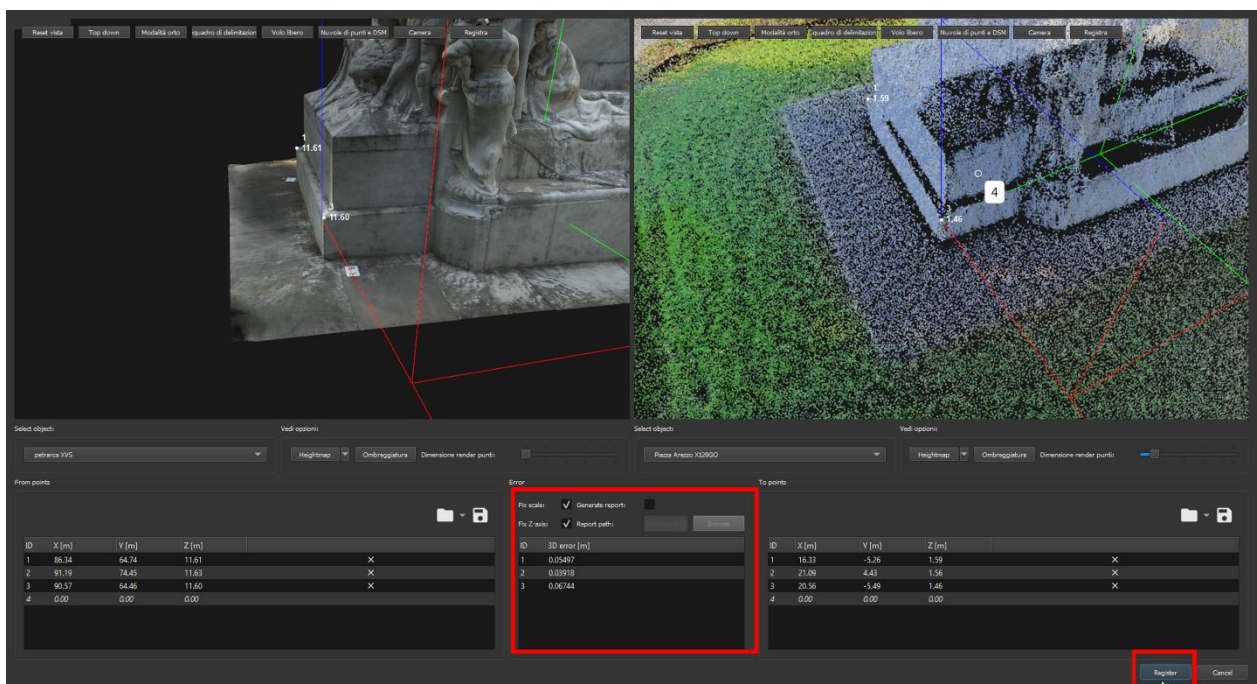

Here is an example of a registration report. The average errors and residuals for each match are shown as 3D error and error for each coordinate.

Point list registration report

Project: New project


lun novembre 28 2022

Mean registration error 0.0119m
Mean target registration error components 0.0126m, 0.0123m, 0.0109m


5 correspondences found.
Point ID, 3D error, X error, Y error, Z error
1, 0.0276m, 0.0103m, 0.0246m, 0.0068m
2, 0.0148m, 0.0116m, 0.0023m, 0.0088m
3, 0.0350m, 0.0211m, 0.0062m, 0.0272m
4, 0.0120m, 0.0101m, 0.0053m, 0.0038m
5, 0.0264m, 0.0098m, 0.0233m, 0.0078m

5.2. Automatic registration (ICP) (S)


Right-click on the name of the point cloud whose registration you wish to refine. The ICP algorithm is used at this stage. You can also click on the button at the bottom right of the tool section to activate automatic registration.

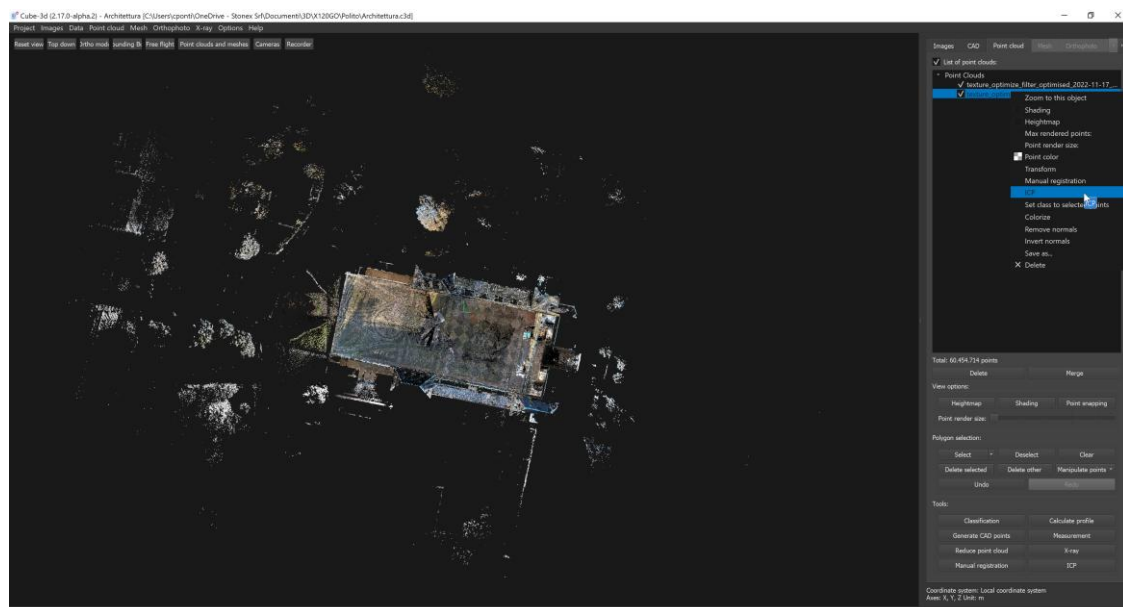

Select the point cloud you wish to record and the reference cloud, then also select an ICP mode from Fast, Normal and Accurate.

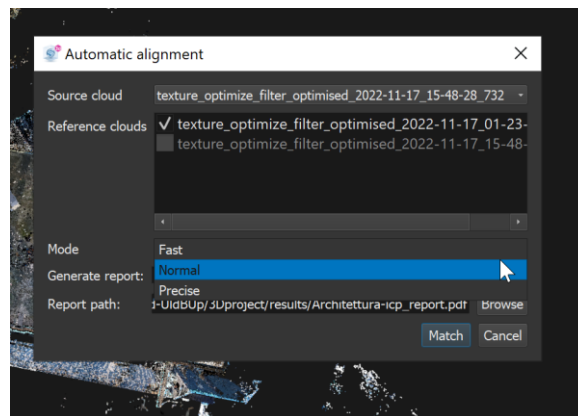

A report can be generated, as for manual recording, by ticking the corresponding option.

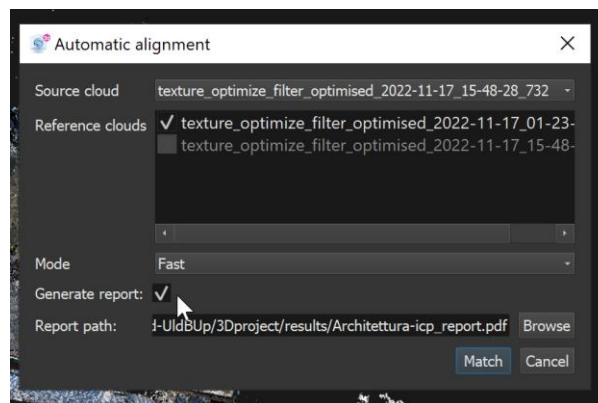

Here is an example of an ICP report

ICP report

lun dicembre 19 2022

2 clouds have been registered:

texture_optimize_filter_optimised_2022-11-17_15-48-28_732
texture_optimize_filter_optimised_2022-11-17_01-23-20_506

Registration sequence in readable form:

Cloud texture_optimize_filter_optimised_2022-11-17_01-23-20_506 is preregistered on cloud texture_optimize_fi



Transformation matrices:

texture_optimize_filter_optimised_2022-11-17_01-23-20_506

0.999990864	0.004273805	0.000079698	0.057696497
-0.004273815	0.999990859	0.000125324	0.227498758
-0.000079162	-0.000125664	0.999999989	0.002486551
0.000000000	0.000000000	0.000000000	1.000000000


6. Point cloud manipulation (PH, S)

The calculated point cloud will appear in Point Cloud tab. To manipulate the point cloud: use **left mouse click** to rotate point cloud, **scroll** to zoom in or out, click and hold the **mouse scroller** to pan the model.

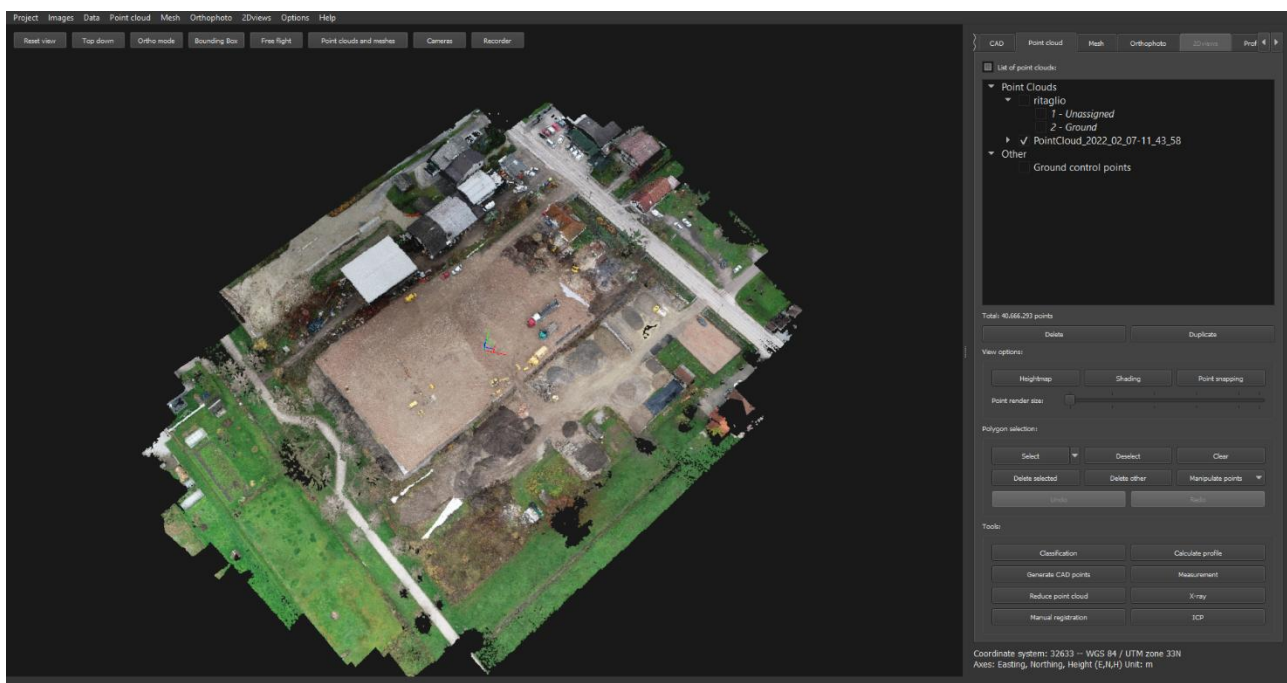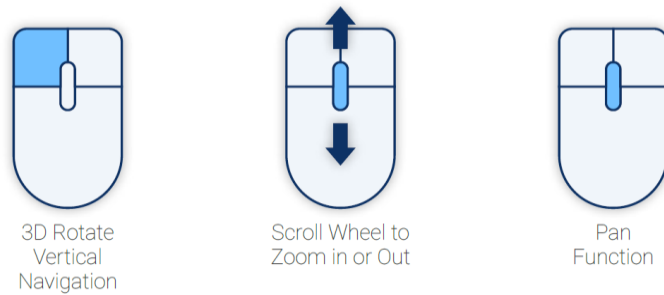

Point Cloud includes points from surface, buildings, vegetation and other objects. To generate a digital Orthophoto those obstructions need to be eliminated (select and delete) as to get a clear digital terrain model that serves as a basis for Orthophoto generation.

6.1. Point rendering (PH, S)

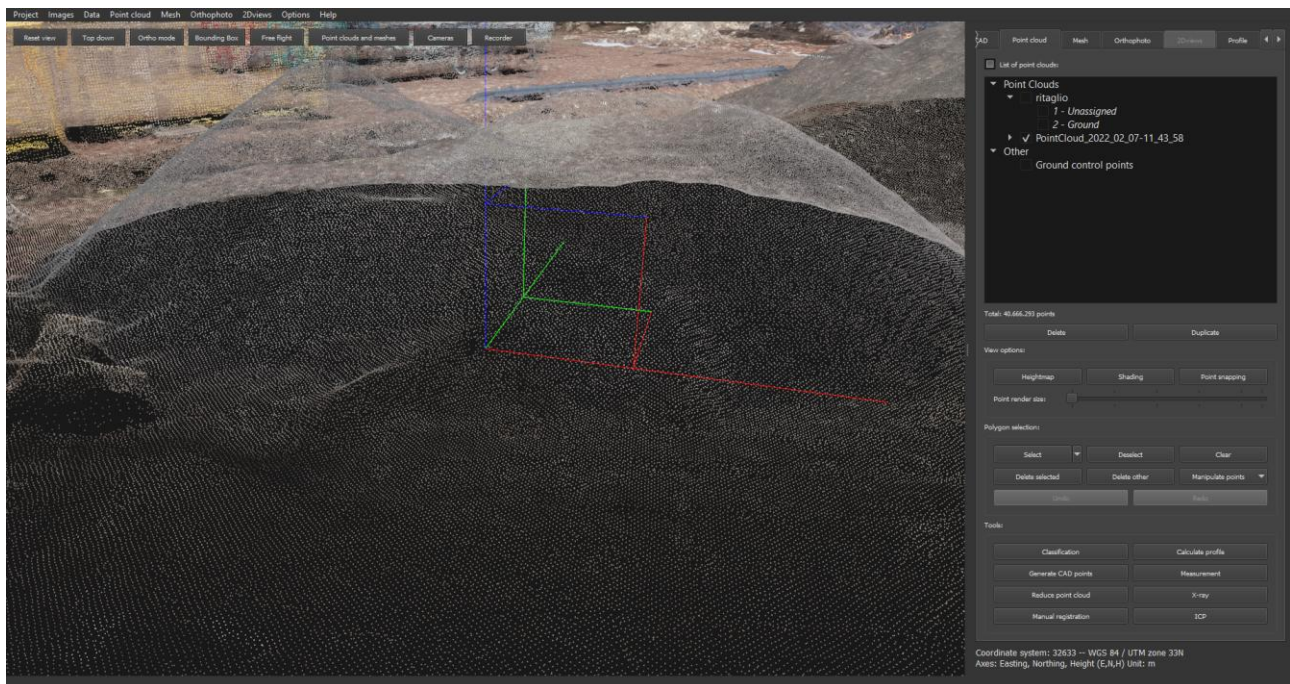

Use the **Point render size bar** to increase or decrease the points of Point Cloud.




6.2. Point snapping (PH, S)

Use the **Point snapping** tool to inspect the 3D coordinates of the point cloud. The x, y, z values are presented in the live command window (lower right corner).




6.3. Cube-3d viewer (PH, S)


Use **Reset view** to set the default view.




If you would like to view PC or DSM from nadir projection, click **Top down** button. Model can now be rotated only around z-axis. The button is on as long as you do not switch it OFF.




If you would like to view the point cloud in orthogonal projection, you need to click **Ortho mode** button. Enabling the function results in the button colouring blue. To rotate around all axes, disable the Ortho mode by selecting the function one more time.




If you would like to capture short movies from your 3D model with an external software, you can use **Free flight** function and smoothly fly around 3D model and objects. Use: **left mouse click + keyboard**. **A** to move left, **D** to move right, **W** to move forward, **S** to move backward, **F** to zoom in, **R** to zoom out, **V** to zoom in centre. **Scroll** to set vertical angle of view. To speed up the flying press +, to reduce speed press -.



If you wish to see PC and DSM at the same time, click **Point cloud & DSM** button. You can use this function in CAD tab, Point Cloud tab or DSM tab. This is a useful tool when you are working with Point Picking function.



If you wish to see positions of cameras above the point cloud – reconstructed terrain, click **Cameras**. You can use this function in CAD, Point Cloud or DSM tab.



Bounding Box – It is a useful tool for two reasons.


First, move sections freely left, right, up or down and the tool lets you easily inspect the data inside the box whilst ignoring everything outside your box selection.

Second, sliding 2 opposite Bounding Box panes together gives you a 3D profile of the surface model.


Third, click and drag on any of the rims of Bounding Box and rotate bounding box around point cloud centre. To move through the 3D model press CTRL and left-click on the Bounding Box pane and you will be able to slide it in any direction and explore all the sections on the fly. Turning on the Height map displays the height differences even more clearly.

Use Bounding box in either point cloud tab or DSM tab.

It is possible to inspect the differences between several point clouds or surfaces, of course. For example, loading two-point clouds from the same area but measured at a different time and using Bounding Box will clearly show the difference. Apply different colours to surfaces for even more impressive results.

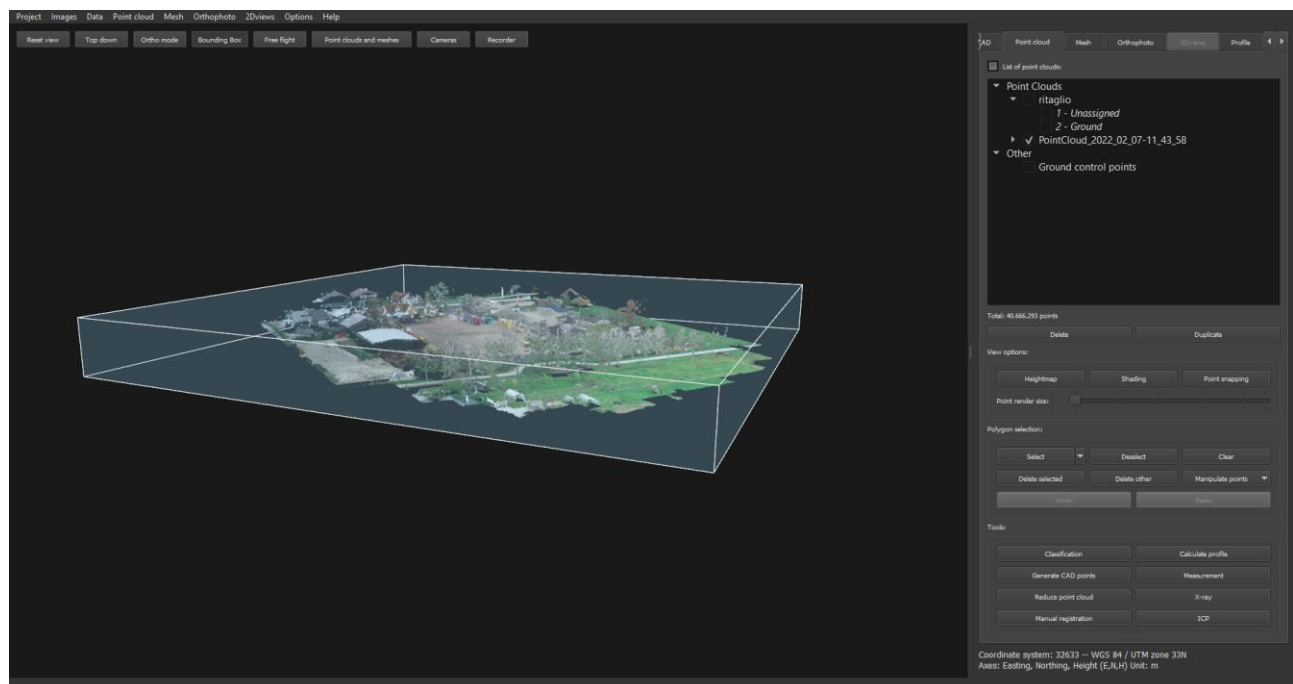


If you wish to record desired parts of computed project and highlight significant details, click **Recorder** button. You can use this function in CAD tab, Point Cloud tab or DSM tab. This is a useful tool when you need to make quick presentation of project and made calculations.




6.4. Point selection (PH, S)

Click **Select** button and draw polygon around surveyed area using **left mouse click**. Finish the selection with **right mouse click**. Selected points will be coloured.


Use the Deselection function to ignore interested points from selection. Left mouse click to select, with right mouse click to finish selection. Use ESC on keyboard to cancel selection or click clear button.

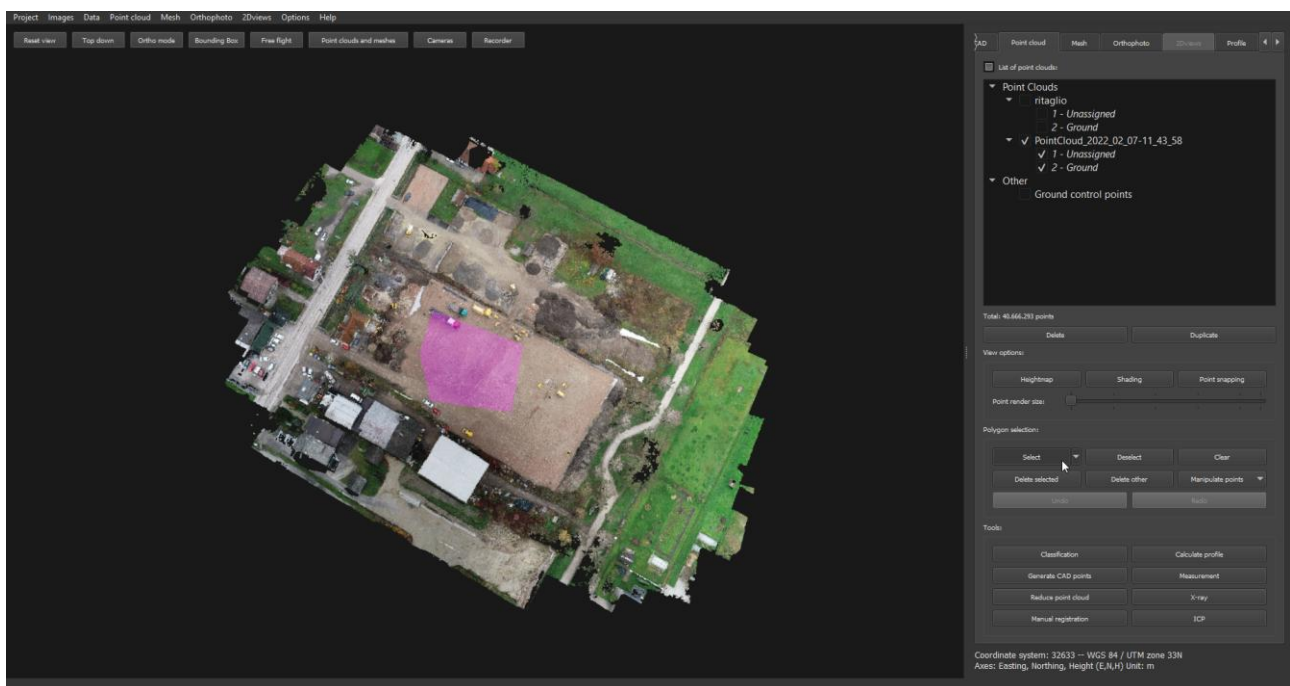

If you click on the triangle, it will also be possible to make the selection based on CAD data or by selecting a colour from the cloud.

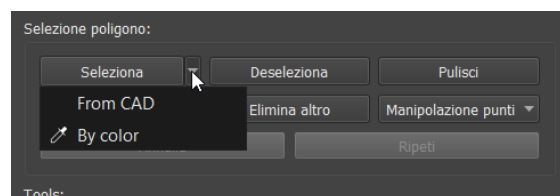


Selecting a colour will open an interactive window giving a preview of the selected colour and you can change the tolerance parameter to select more or fewer points of similar colour. Clicking OK will select the corresponding points and you can decide what to do with this selection.

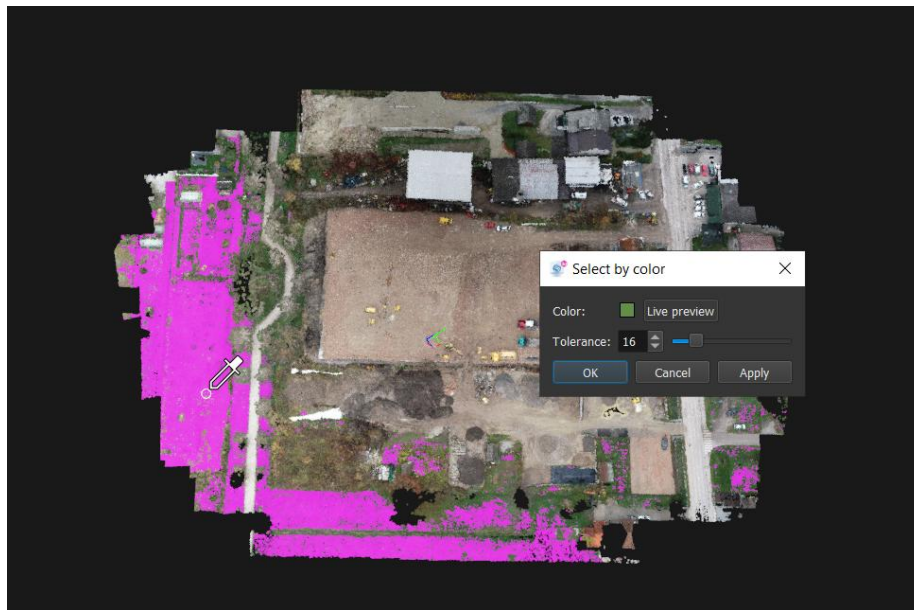

6.5. Deleting points (PH, S)


To delete points, you need to select them first.

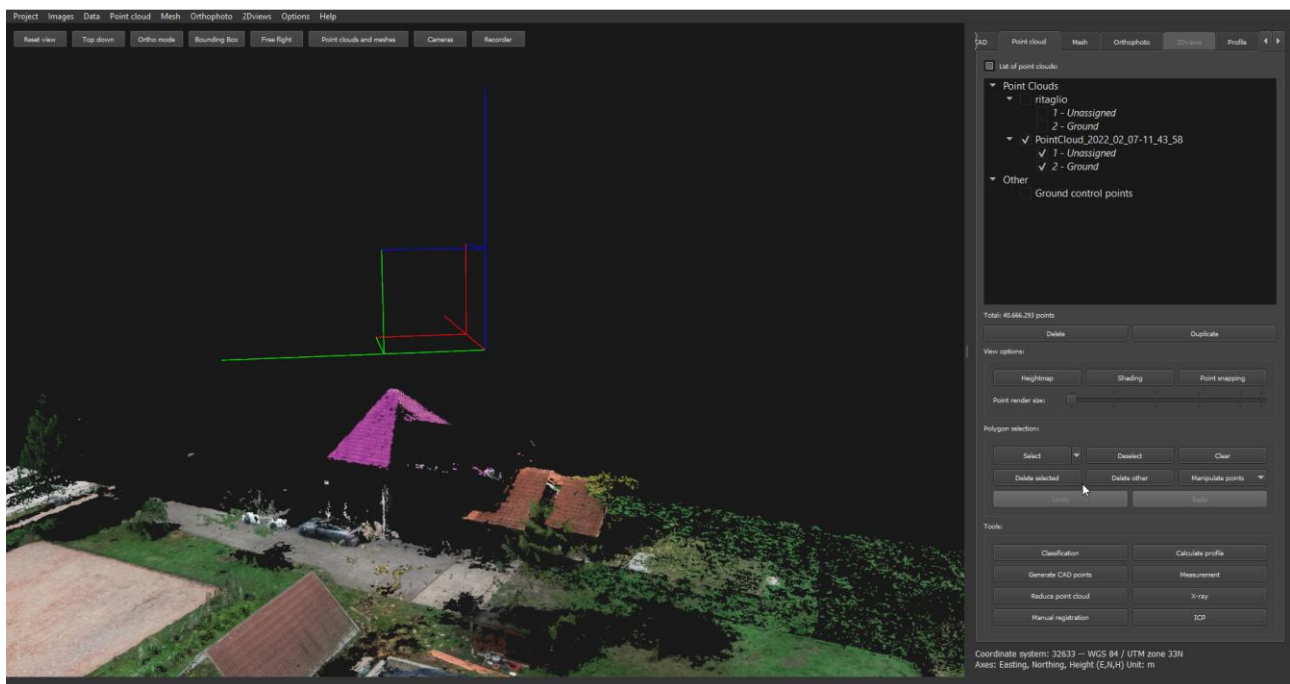


Delete selected points either by clicking **Delete selected** button or use delete button on keyboard. Use **Delete other** function to delete everything that is not selected. Use **Undo** or **Redo** function in case you change your mind.

6.6. Manipulate points (PH, S)


Popup **Manipulate points** enables you to **set height**, **increase height** or **compute average height** of selected area. **Select** desired area and click **set height**. **Type** desired new **height** and click **OK**. The selected points are moved accordingly.

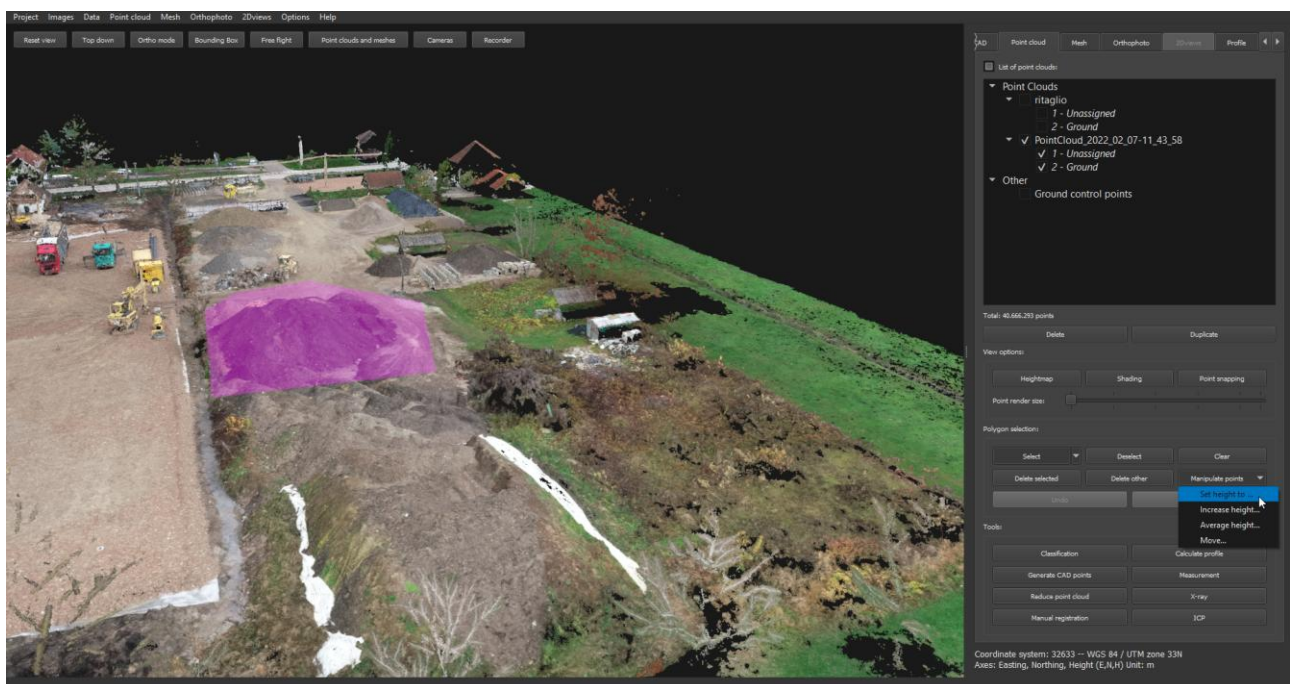

In case you would like to lower or raise the selected points use increase height function and type the desired value. For example, if you would like to lower the selected points for 0.5 meters type -0.5 m. If you would like to raise the selected point to specific value, type for example 1.5m and click OK.

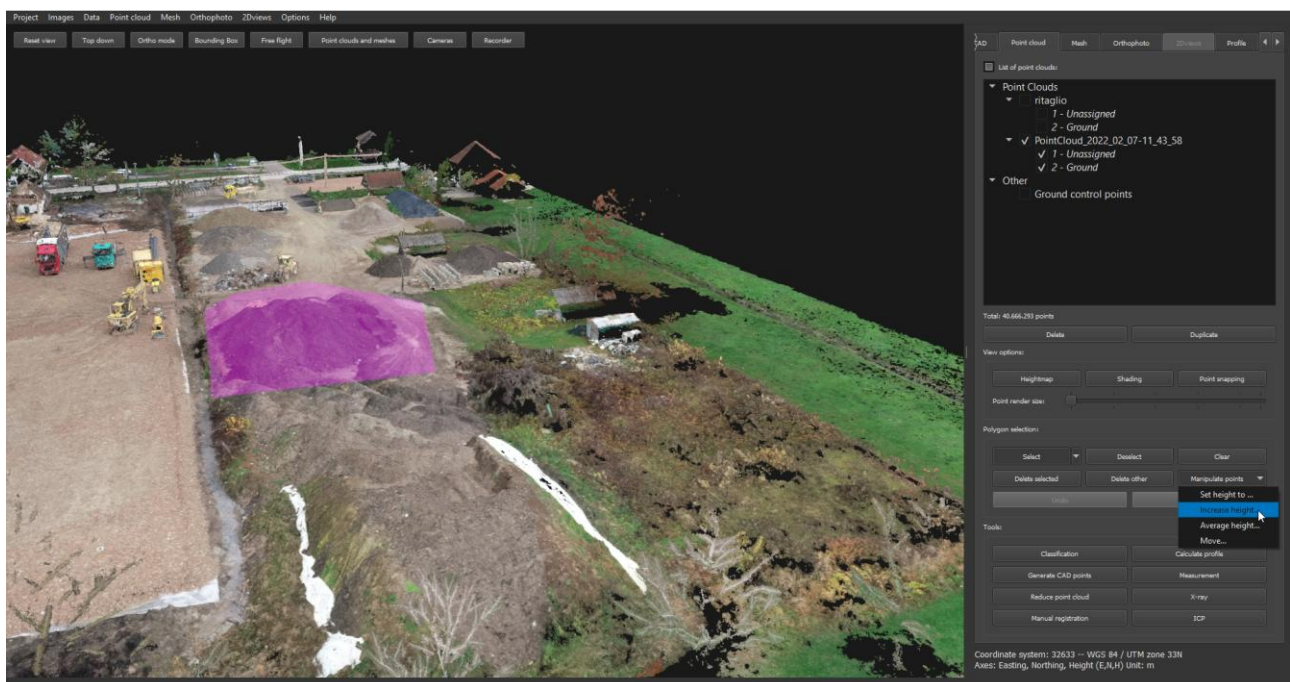

You can also compute the average height of selected points. Firstly, select the area of interest, go to Manipulate points and click Average height.

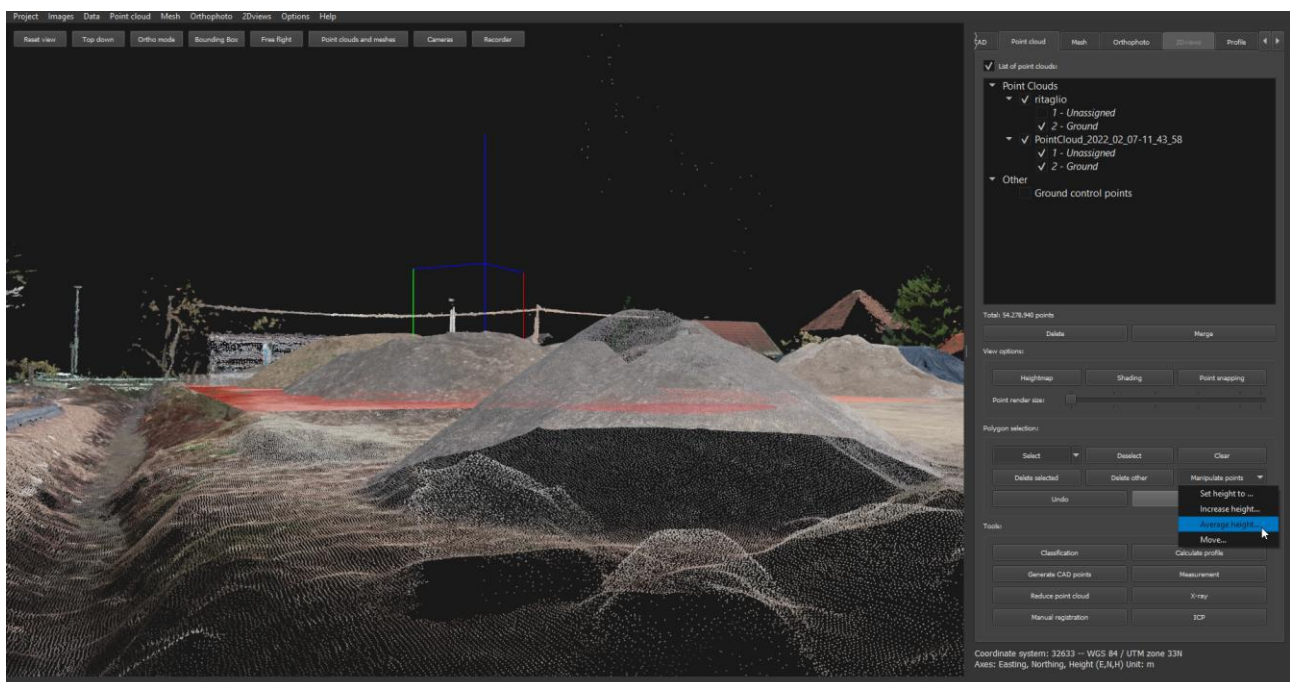

6.7. Calculating profile (PH, S)

It is often required, especially on construction sites, to present profiles. Open Point cloud tab and click **Calculate profile**. Set the parameters in the pop-up:

Consider point within distance 0.15 by default – distance of buffer zone for snapping longitudinal profile to PC,

Approximate segment length 0.15 by default – approximate stationary distance of longitudinal profile,


Calculate transverse profiles disabled by default – to set computation of transverse profiles,

Distance between transverse profiles 10 by default – stationary distance on longitudinal profile to compute transverse profiles,


Length of transverse profile on each side 10 by default – width of either flank of transverse profile.

6.7.1. Longitudinal profile

To compute longitudinal profile, **Calculate transverse profiles** must be **disabled**. Click **Select profile definition line** to define profile.

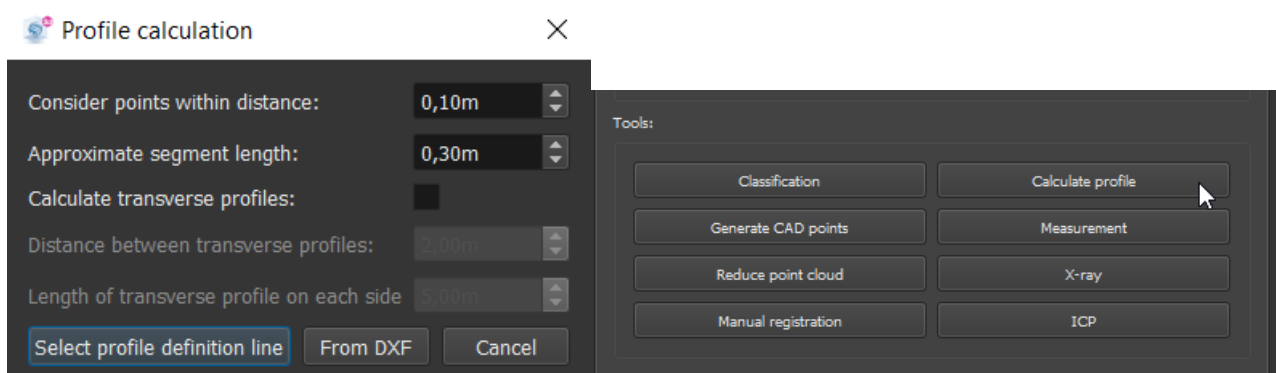

Left clicking the mouse, **draw polygon**, that defines longitudinal profile, ending it with a right mouse click.

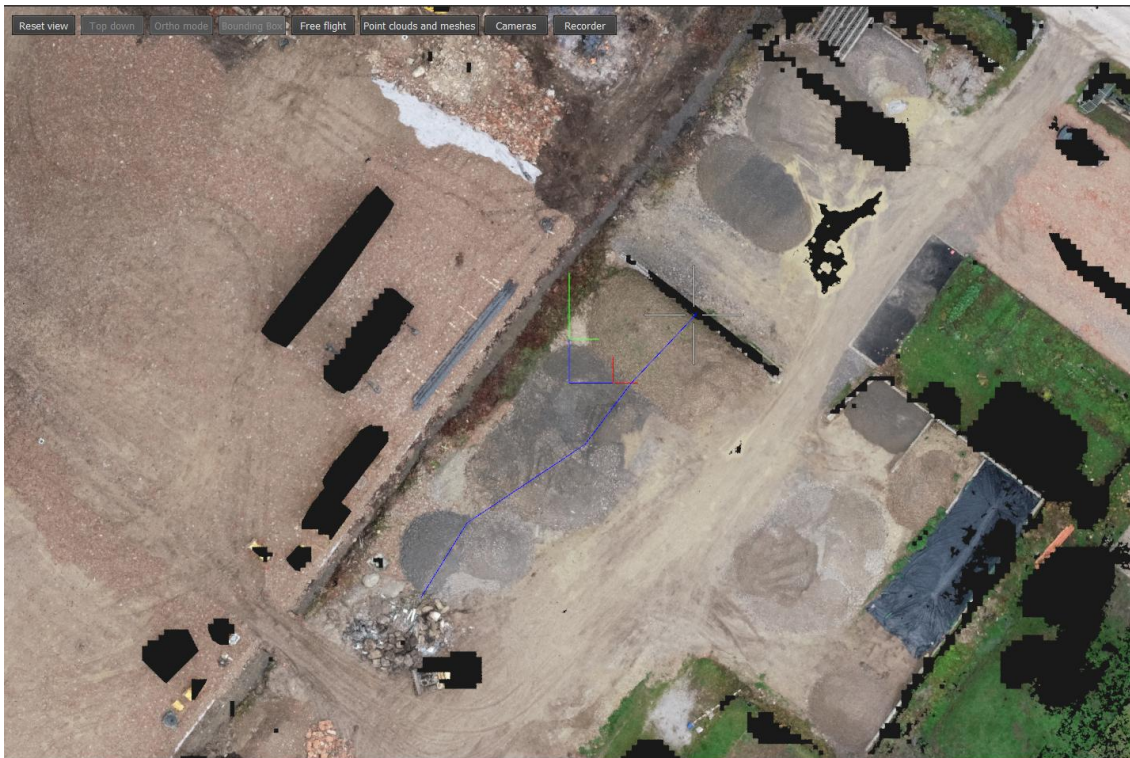


Calculated profile is displayed on the Point cloud in both 2D and 3D or on the mesh (purple line).



Calculated profile, presented on orthophoto (green line)




Computed longitudinal profile is displayed in the working panel.

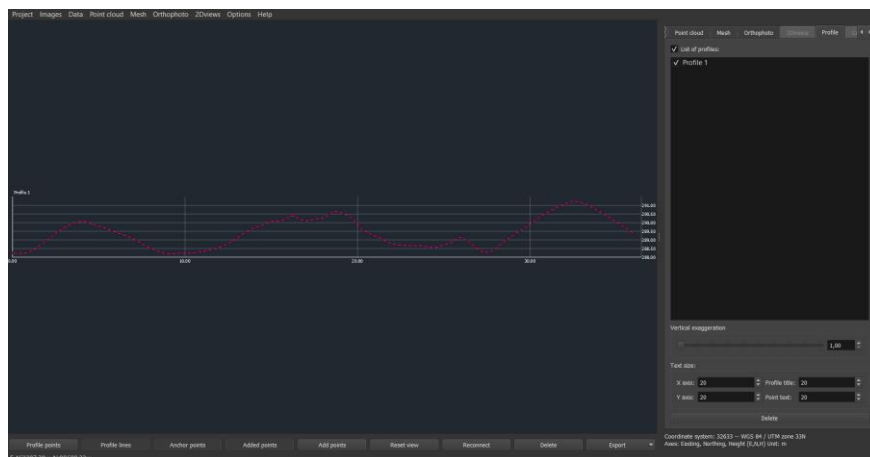

Save project to save results.

6.7.2. Transverse profiles



To compute transverse profile, **calculate transverse profiles** must be **enabled**. Click **Select profile definition line** to define profile.

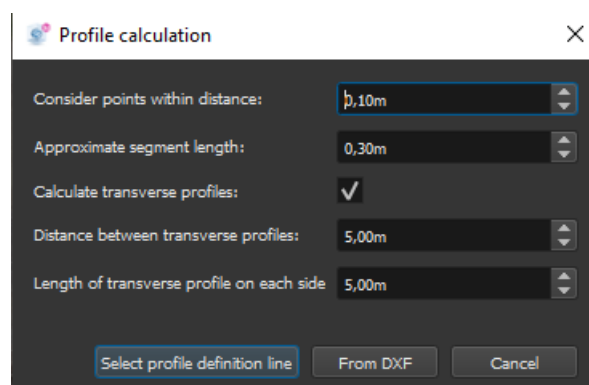


Left clicking the mouse, **draw polygon**, that defines longitudinal profile, ending it with a right mouse click.

An aerial photograph of a construction or industrial site. A large, irregular pile of grey material, possibly gravel or crushed stone, is the central focus. To the left of this pile, there are two yellow and blue containers and a green vehicle. A pink dashed line is drawn around a portion of the grey material pile. The top of the image shows a toolbar with various icons for navigation and analysis.

Stonex Cube-3d – User Manual 52

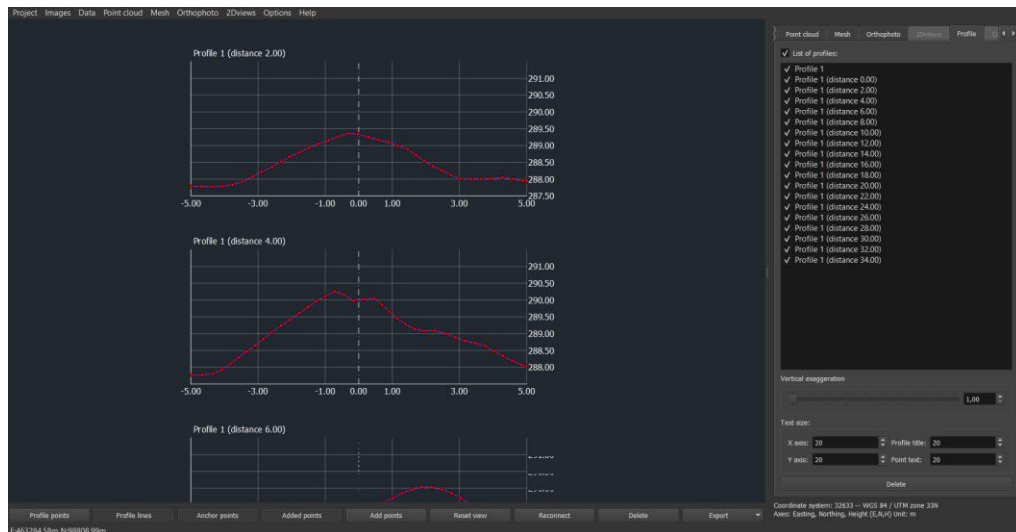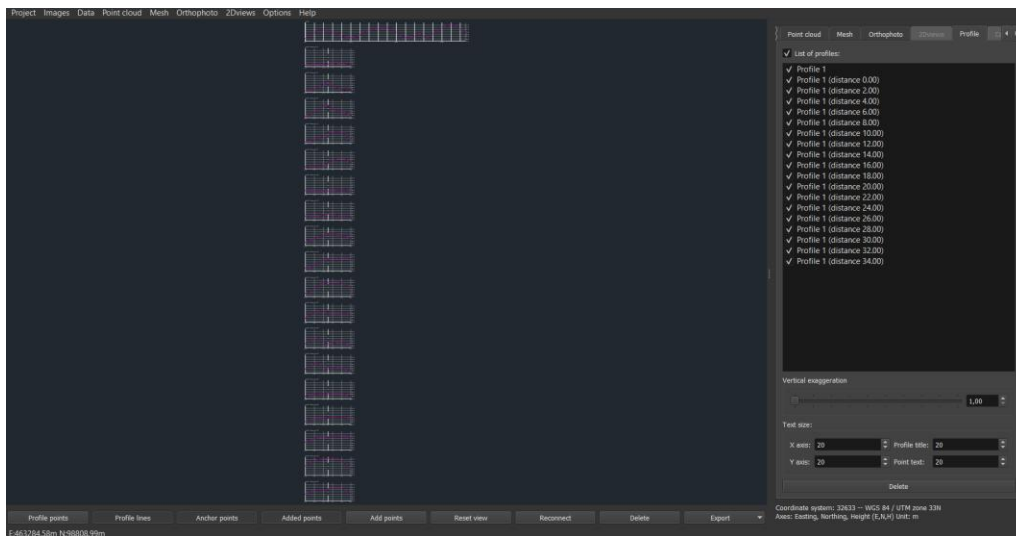


Using point clouds of two temporal measurements of construction site, you can observe reshaping of terrain, as presented below. Transverse profile shows two profile points, which present two measurements.

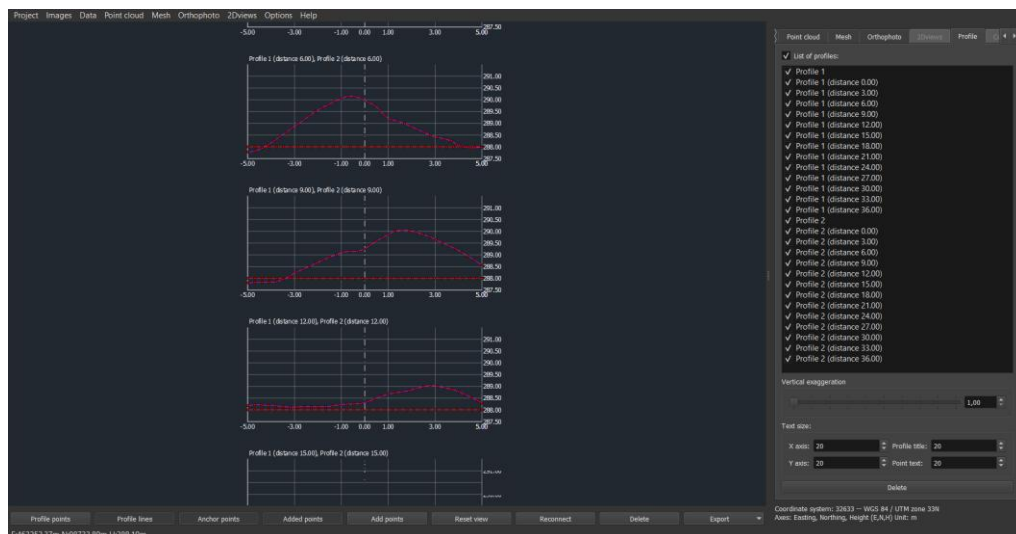


6.7.3. Profile manipulation


Profile manipulation buttons/tools are displayed on the bottom of the profile window.

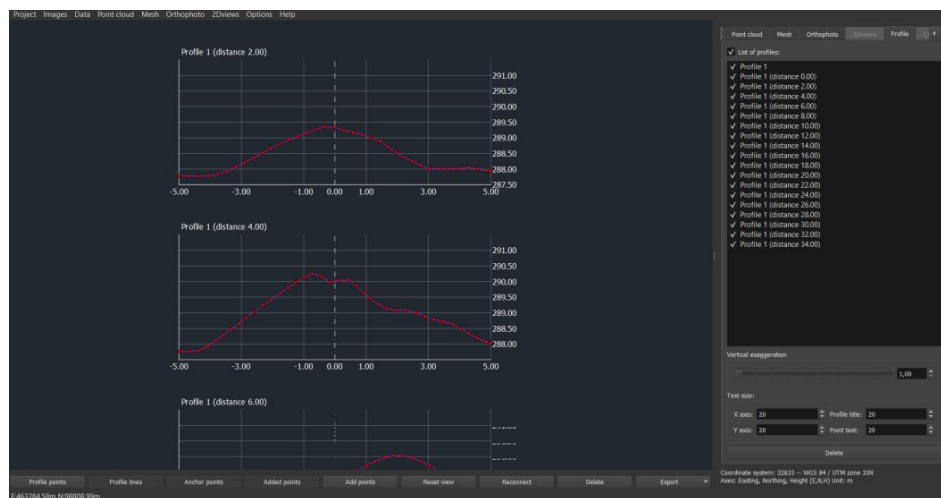


- **Profile points** show point cloud points detected in buffer zone.

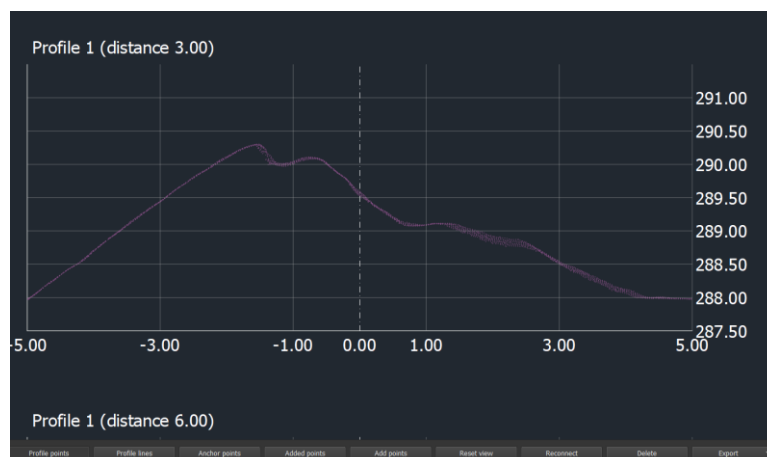


- **Profile lines** show lines that define profile.

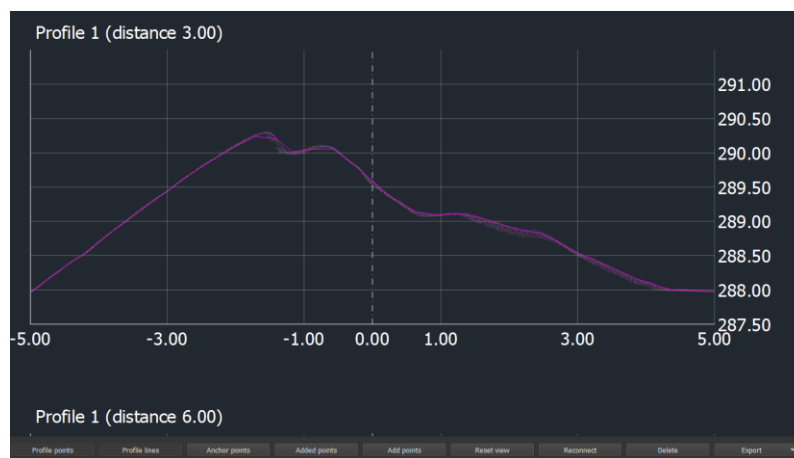


- **Anchor points** show the interpolated point that defines the profile line. By double-clicking on the anchor point line, anchor points can be added and moved to better define the profile.

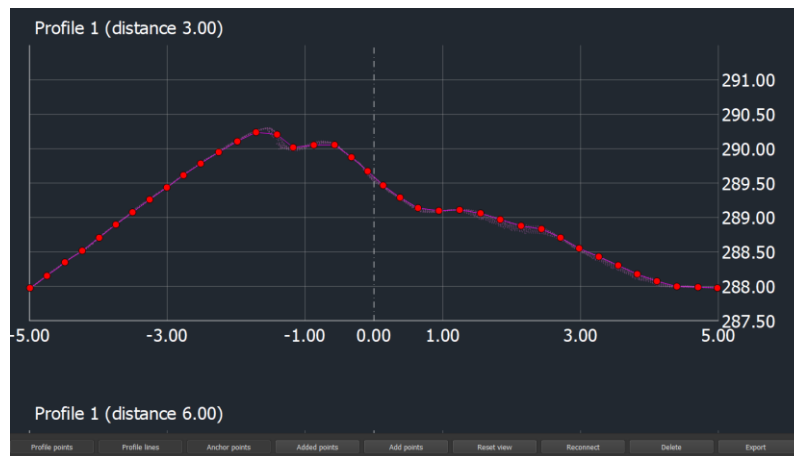


- **Add Points and Added Points** allows you to mark points and edit their names.

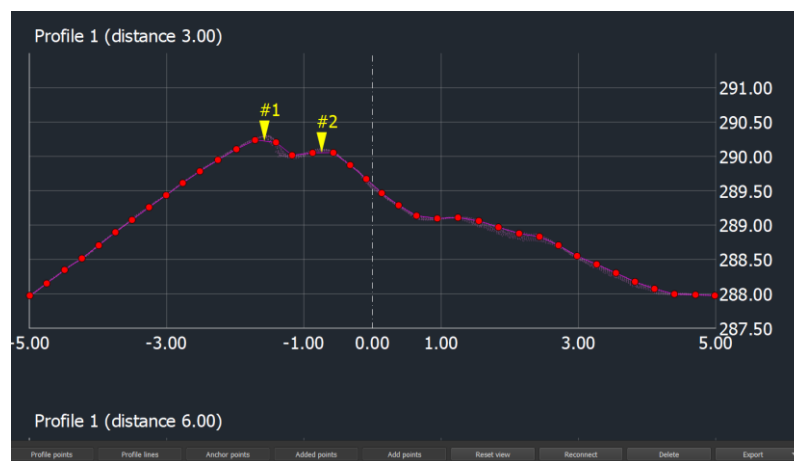


- **Reset view** returns the view to all profiles.
- **Reconnect**, reconnects profile line between two selected anchor points. When you have a bump or undeleted object on top of the terrain, or if you would like to reshape it. Here we have transversal profile computed across construction machinery.

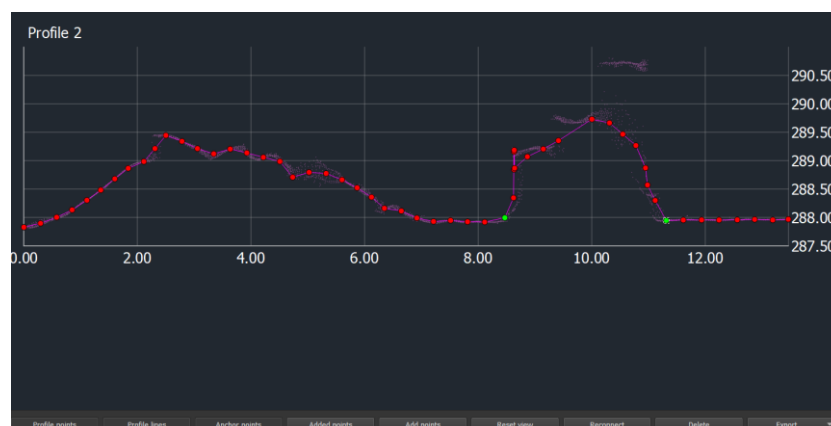


To shape it to preferable curve or level, zoom to transversal profile and click two external points that present the desired shape. Click **Reconnect** button and the transversal profile will be reshaped. As you see, points that define transverse profile remain present as profile points - the new shape is displayed below them.

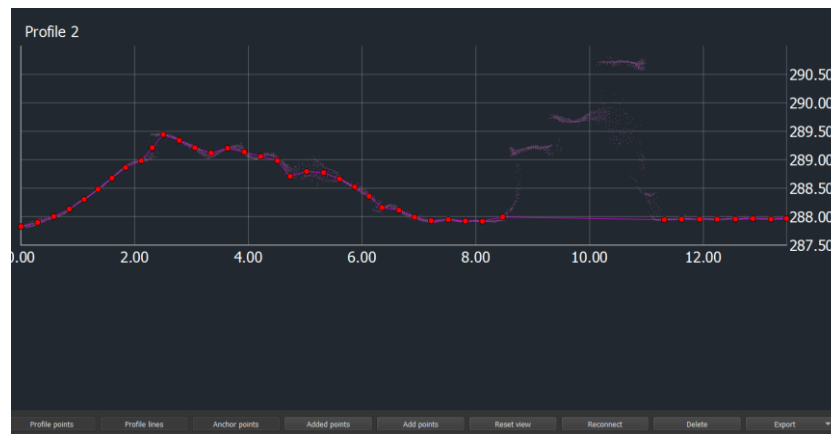


- **Delete** deletes selected anchor point and automatically reconnects neighbouring points.
- **Export**, exports profiles between several possible formats: .dxf, .pdf, CADDy profile format (.lng, .que).

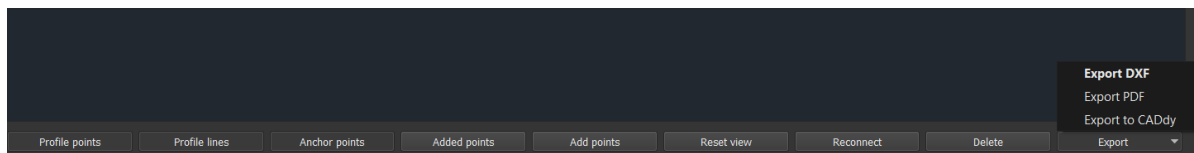

- **Vertical exaggeration** slide bar allows you to extend vertical scale of profile.

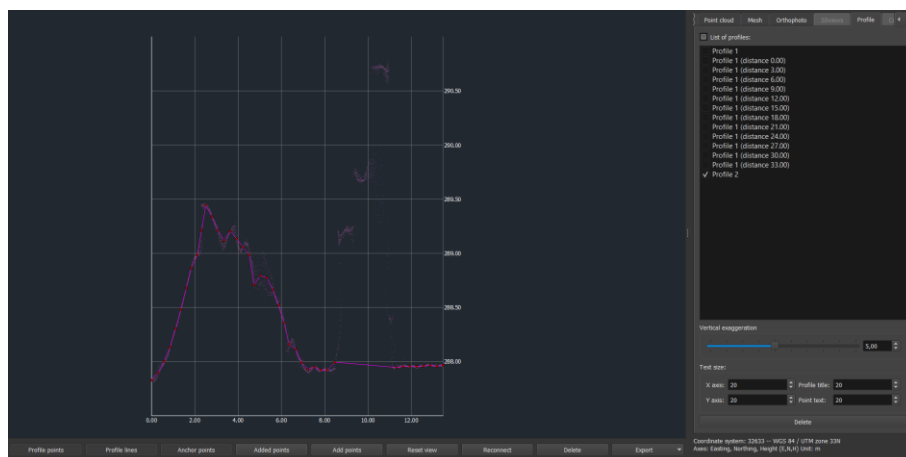


- **Text size:**
 - **Profile title**, allows you to change scale of profile title.
 - **Y – Axis**, allows you to change scale on longitudinal axis.
 - **X – Axis**, allows you to change scale on vertical axis.
 - **Point text**, allows you to modify text size of added points.

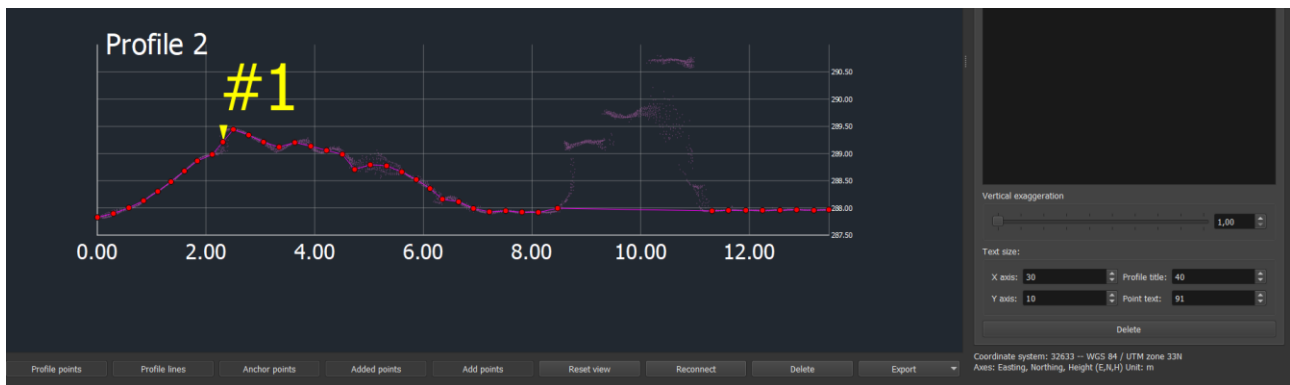


6.8. Point cloud merge (PH, S)

If you have different point clouds you can merge them to a new point cloud. Both point clouds need to be selected. Click **Merge** button to merge them into one.

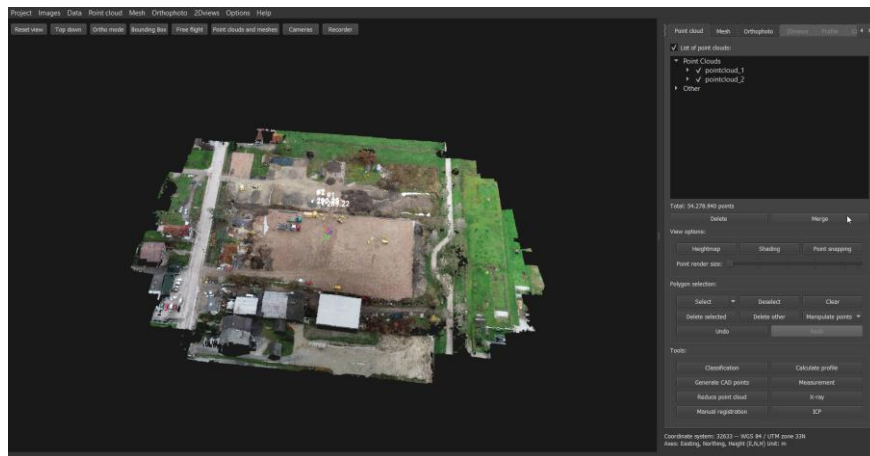


New point cloud appears called as the composition of the two previous clouds.

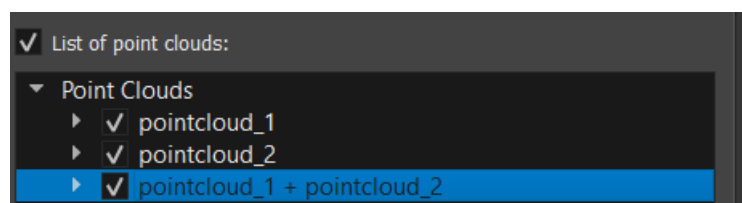


6.9. Colormap (PH, S)


When processing point clouds or DSMs, the data can be displayed in hypsometric scale. When displaying the desired data, click on the **Colormap** button to select the type of display you want. If the cloud is photogrammetric, only the **Height Map** will be present, while if you are using laser scanner scans you will be able to choose between **Elevation, Intensity, Scan Time or Return data** (this field may be missing, depending on the data your scanner saves). Once you have chosen the field, you will be able to view the coloured model according to the chosen feature with the accompanying scale and colour legend. Double-click on the colour legend to change it.

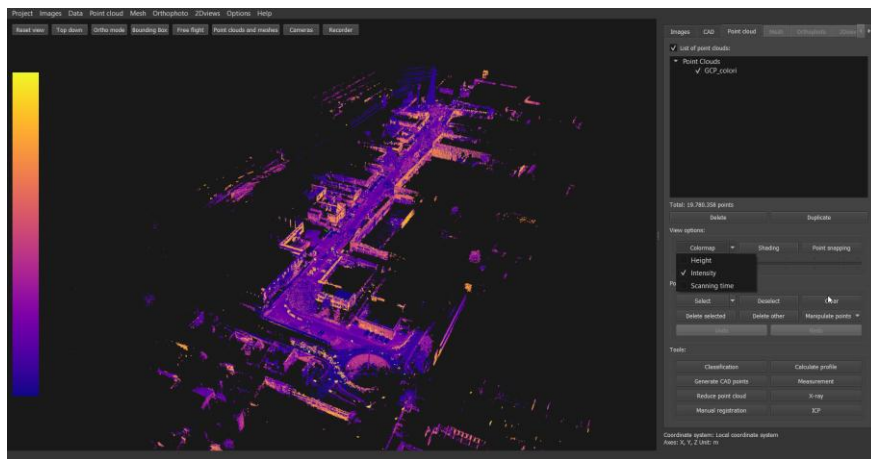


Is possible to set custom range for each colormap. To change the range, **right-click** on the colour legend and choose set range.

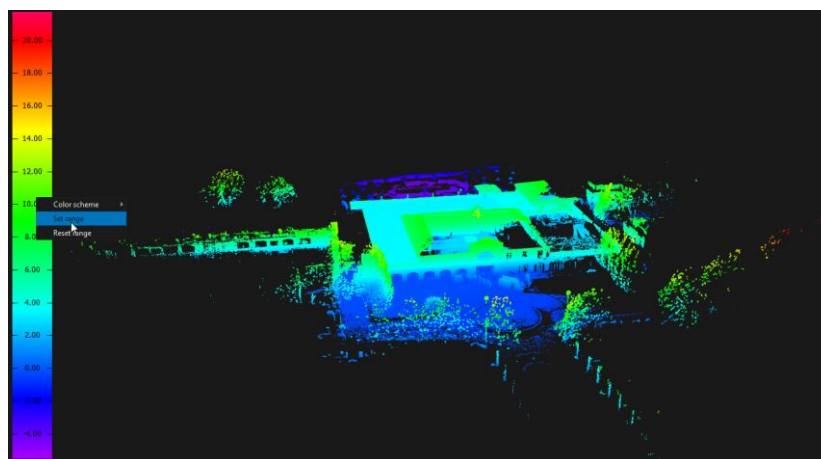

Now the window for range settings will pop-up. Here you can modify the range.




Once you set the new range the visualization of the point cloud will change. The part of the point cloud out of the range will be visualized with the original texture.

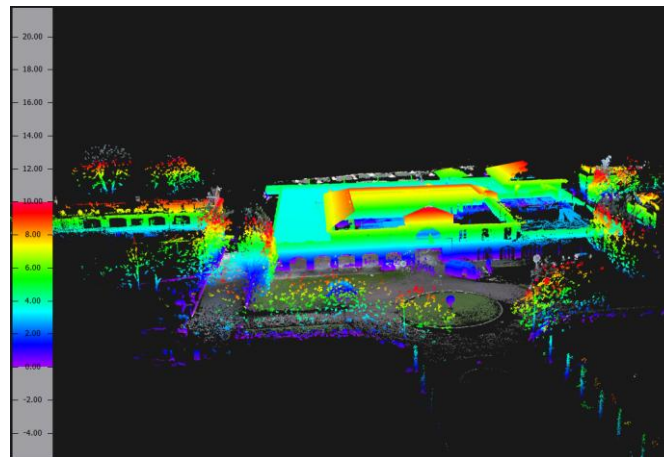

To reset the scale, **right-click** on the scale and choose reset range.

6.10. Shading (PH, S)

For better perception of spatial characteristics, point clouds, and meshes can be shaded. Click on **Shading** button to display shades on point cloud points. This option is available if the point cloud has normal calculated. If not calculated, right-click on the point cloud name and click calculate normals.

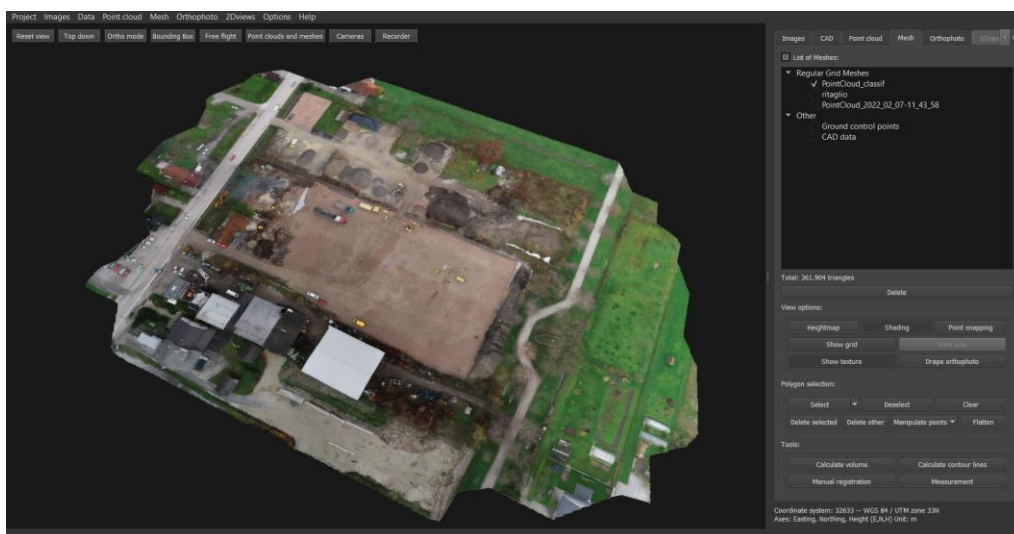


6.11. Delete (PH, S)

Tick point cloud data that you would like to delete from application and click **delete** button.

6.12. Generate CAD points (PH, S)

Use CAD point generator and automatically extract points in regular grid of desired size, with CAD capabilities. You have 2 options, select desired area or use CAD function and draw closed polygon for selection. Here, we guide you through first option.

Select desired area of point cloud, and click Generate CAD points function.

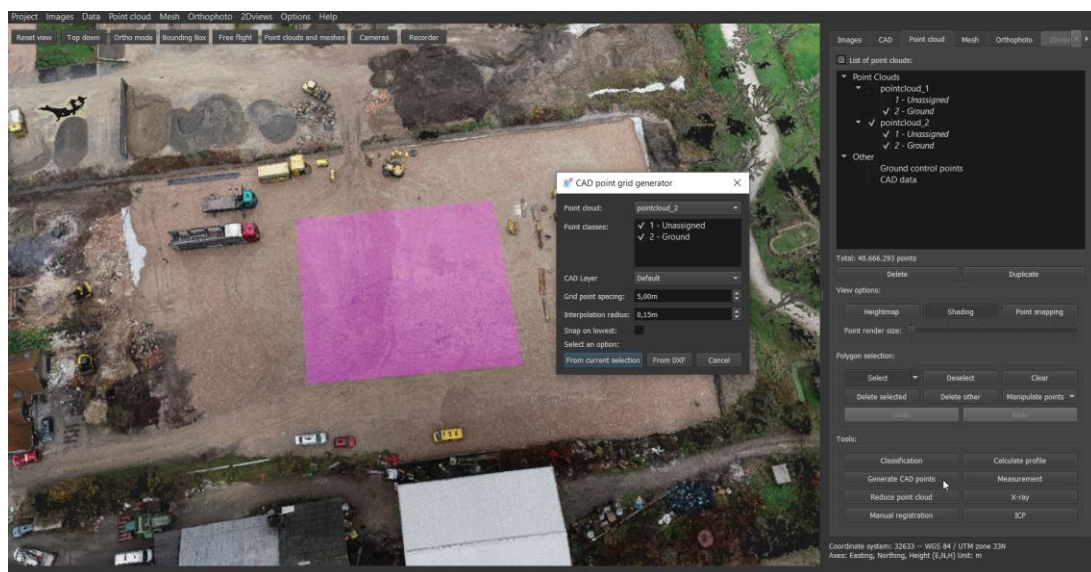

Set parameters:


- Point cloud: Choose from the drop-down menu the cloud from which to obtain points.
- Point classes: If you have made the classification, decide whether to delete certain classes from the generation phase.
- CAD layer: Choose the CAD layer in which to create the points.
- Grid point spacing: default 5m.
- Interpolation radius: default 0.15m.
- Snap on lowest: Possibility to extract only the lowest points.

Confirm by selecting desired option of selection. In our case **From current selection**. Generated CAD points with displayed height are presented.



6.13. Reducing point clouds (PH, S)

Want to reduce point cloud points, but don't want to process reconstruction again. Use **Reduce point clouds** function.

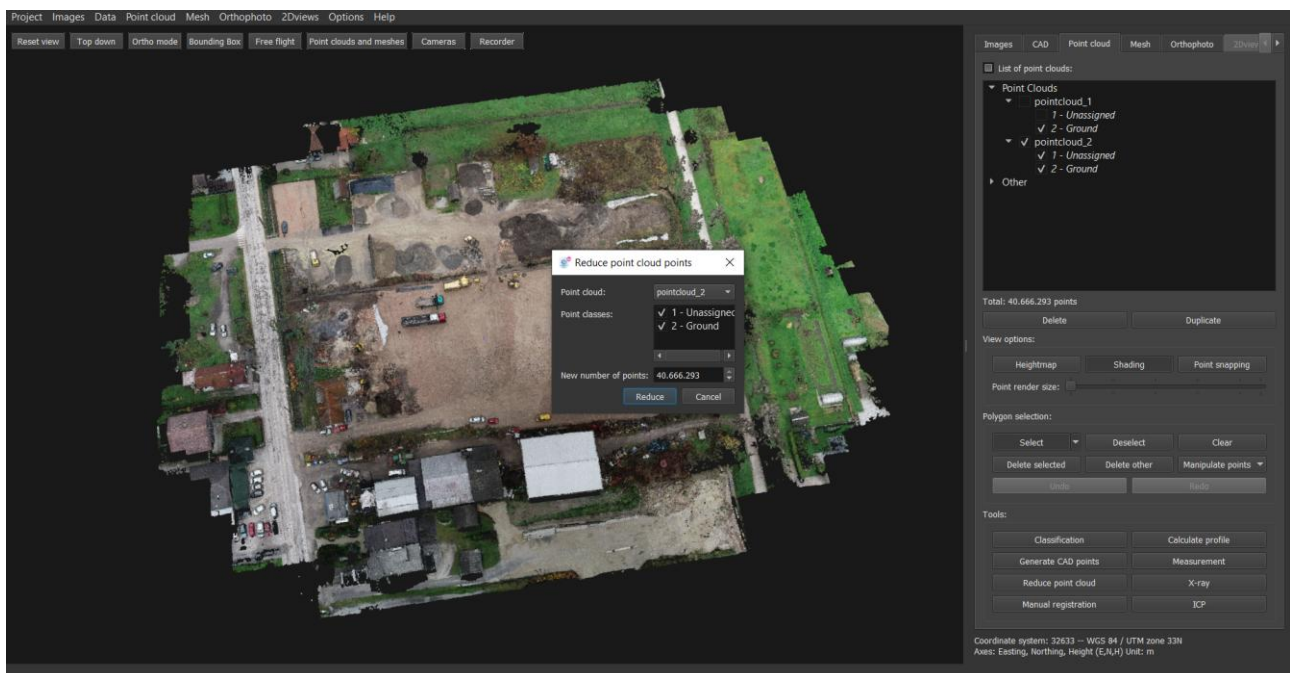

Define desired point cloud and set desired number of point cloud points. Typed value, that must be lower than original point cloud. New point cloud appears with "-reduced" in the name.

6.14. Saving point clouds (PH, S)

Save project. You can export PC to – Select from dropdown list **Point cloud** -> **Save as:**

- *.ply – default Stanford mesh file
- *.las *.laz – laser and LiDAR files
- *.zlas – LiDAR ESRI file
- *.koo – file of coordinates,
- *.txt – text file.
- *.xyz – text file
- *.csv *.dsv – delimiter-separated values format
- *.pts – PTS format
- *.cl3 – TOPCON LC3 format
- *.e57 – ASTM E57 format


6.15. Calculate point cloud colour from photogrammetry images (PH)

It is possible to recalculate a texture for a point cloud coming from laser scanner or from photogrammetry using images. The important thing is that the images and the point cloud are in the same reference system.


First load the point cloud you want to retexture in the software. Second load images inside cube 3D. Process the bundle adjustment and create at least a sparse point cloud from those images.

If needed perform the orientation for the sparse point cloud, so that everything is in the same reference system.

Right-click on the pointcloud name and select colorize.

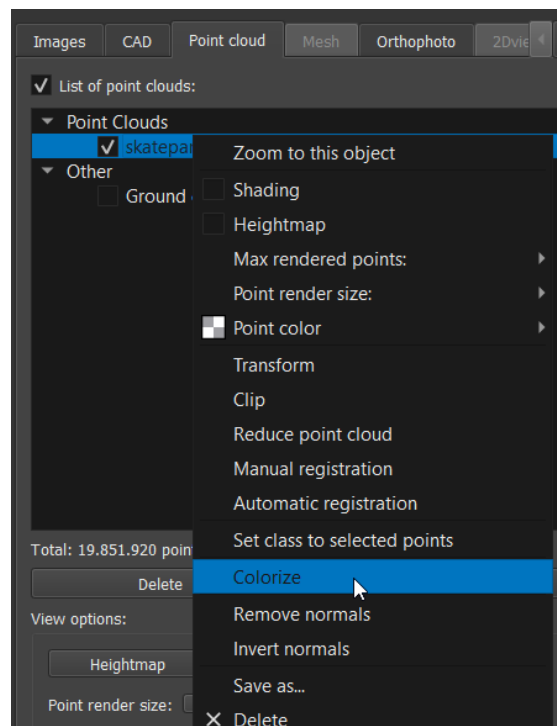


The software will start to apply the colour to the point cloud, based on the images.

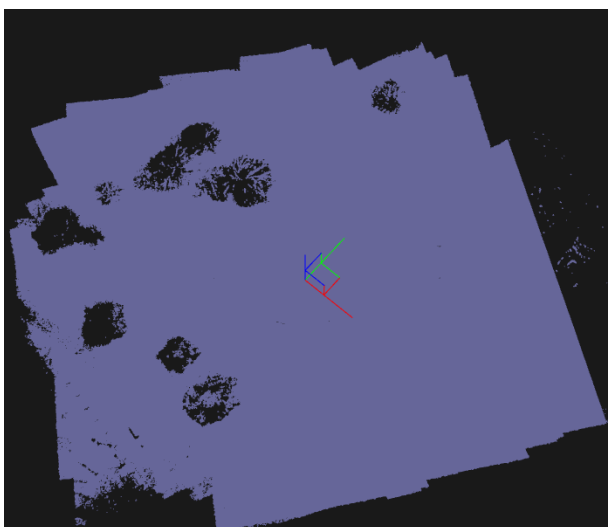

6.16. Classification (PH, S)

Click **Classification** button to classify terrain points. In the pop-up window, you can adjust:

- terrain elevation –maximal sudden elevation changes in terrain
- terrain slope –maximal angle between horizon and slope in degrees,
- minimal height – minimal height of objects to be deleted,
- DSM cell size - cell size of previously computed DSM,
- smoothing factor – proportionate to smoothness of classified terrain.
- smoothing maximum size – maximal size of influential area.
- pointcloud from laser scanning (LiDAR) - applies a different algorithm depending on whether the data comes from LiDAR or photogrammetry.

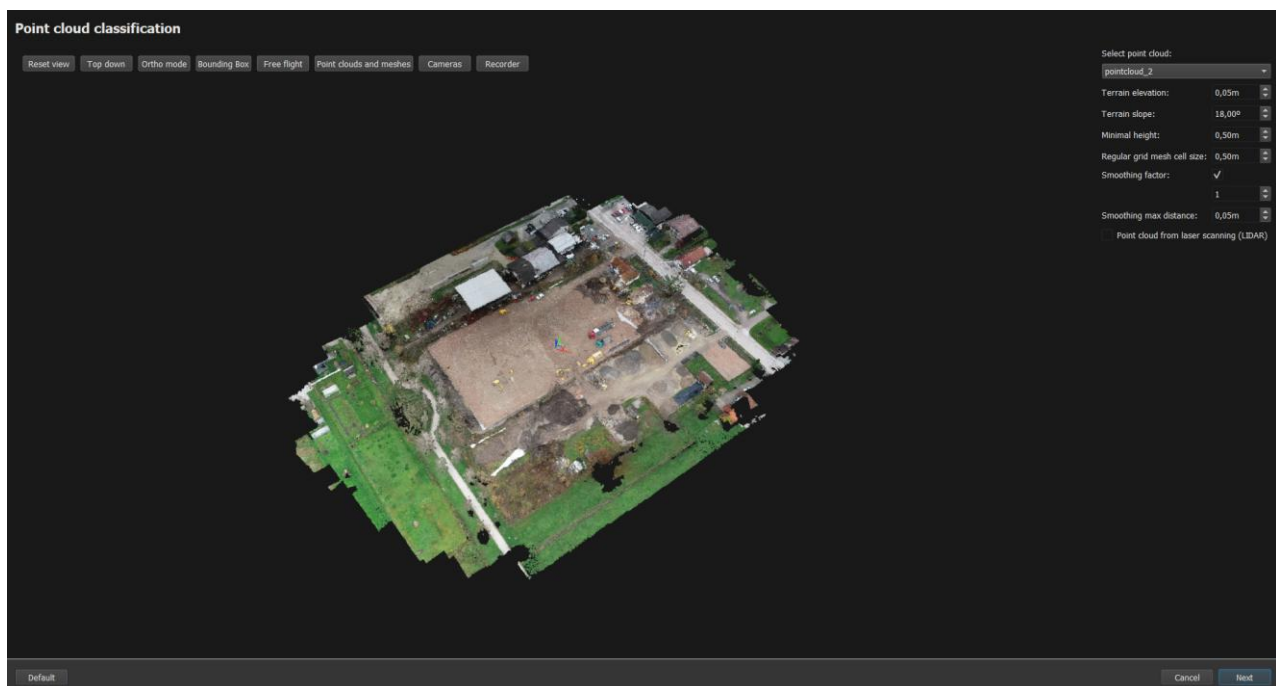

After setting the parameters click on Continue. You will arrive at a new screen. Here select certain portions of what is visually recognisable as terrain. These will first be enlarged, based on the previously selected parameters, and finally displayed with a violet colouring.



Click on Continue to allow the software to refine the search for points to be classified. At this point you will move on to the second classification step with which to further refine the classification, if you notice any parts of the terrain that are poorly classified.

If you are satisfied with the result click **Finish**, otherwise click **Recalculate** to repeat the procedure.

Classification Parameters Guide

The Classification Tool in Cube-3d operates in two primary steps: 1. Marking the Points, and 2. Filtering the Points. This guide explains the parameters involved in each step and their impact on the classification process.

1. List of Parameters

Terrain Elevation: Sets the allowable vertical difference when comparing the elevation of neighboring cells. A higher value allows more variation in elevation, enabling more points to be classified as part of the ground surface.

Terrain Slope: Defines the maximum slope angle difference between cells. A larger slope value allows steeper variations, allowing more points to be considered as ground surface.

Regular Grid Mesh Cell Size: Determines the size of each cell in the grid mesh. Smaller sizes capture more detail but may require more processing time, while larger sizes process faster with less detail.

Smoothing Factor: Controls the amount of smoothing applied to the terrain data. Higher values create a smoother surface by reducing small variations.

Smoothing Max Distance: Limits the distance over which smoothing is applied. This ensures that smoothing affects only nearby points, preserving larger terrain features.

2. Classification Process

The process of point classification is as follows:

1. **Parameter Selection:** First, select your classification parameters, including Regular Grid Mesh Cell Size, Smoothing Factor, and Smoothing Max Distance. Once the parameters are set, initialise the process by clicking Next. Upon initiation, a regular grid mesh is automatically created based on the selected parameters. This mesh organises the point cloud data for efficient processing.
2. **Terrain Region Selection:** In Classification Step 1, you will be prompted to select some of the largest terrain regions across different areas of the point cloud. This manual selection helps the software identify and classify the main ground surfaces. The selected points are highlighted in RED to indicate they are classified as ground surface points.
3. **Point Filtering:** The software filters points by comparing the manually selected cells with their neighbouring cells using the Terrain Elevation and Terrain Slope parameters. If the elevation difference or slope angle exceeds the specified thresholds for neighbouring cells, those cells are excluded from the ground surface classification. Consequently, higher values for Terrain Elevation and Terrain Slope result in more points being included in the ground surface classification.

3. Example

In the example below, there are two figures illustrating the effects of different classification settings.

Default Classification Settings

Figure 3a shows points marked and filtered using the default classification settings:

- **Terrain Elevation** = 0.05 m
- **Terrain Slope** = 18°
- **Regular Grid Mesh Cell Size** = 0.5 m
- **Smoothing Factor** = 1
- **Smoothing Max Distance** = 0.05 m

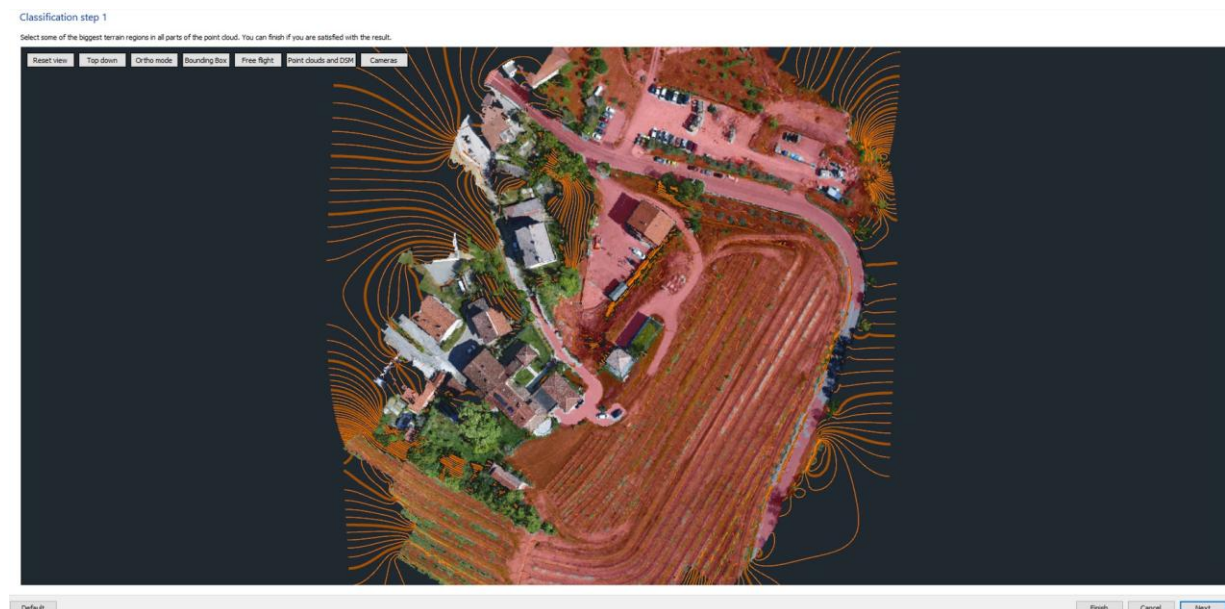


Figure 1: Points marked and filtered by default classification settings

Increased Terrain Elevation and Slope

Figure 3b displays the results obtained by increasing the values of **Terrain Elevation** and **Terrain Slope**. Evidently, there is an increase in the size of the area marked in RED. The parameters used for this classification are:

- **Terrain Elevation** = 0.1 m
- **Terrain Slope** = 26°
- **Regular Grid Mesh Cell Size** = 0.5 m
- **Smoothing Factor** = 1
- **Smoothing Max Distance** = 0.05 m



Figure 2: Points marked and filtered by increased values of **Terrain Elevation** and **Terrain Slope**

Effect of Smoothing Max Distance

A similar increase in the marked area can be achieved by adjusting the **Smoothing Max Distance** parameter, which affects the classification as follows:

- If the difference between the approximation of the **regular grid mesh** and a point is smaller than the **Smoothing Max Distance**, the point is marked RED (as part of the ground surface) in the second step of classification.
- If the difference is bigger than the **Smoothing Max Distance**, the point is not marked.


For example, increasing the **Smoothing Max Distance** to 0.7 m will result in less points being filtered out during the second classification step. However, this adjustment may lead to undesirable results, such as:

- **Kept points Around Vehicles:** Points representing details like tires around cars may remain in the point cloud after classification.
- **Lower Parts of Building Walls:** Points in the lower sections of building walls might also remain, resulting in less accurate classification.

Careful tuning of the **Smoothing Max Distance** is essential to balance between reducing noise and preserving important terrain features.

Special Case: Stockpiles

When performing classification on stockpiles, there is a high chance that the tops of the stockpiles won't be included in the terrain surface. In Figure 3, we used the default classification settings, and as a result, the tops of the stockpiles were not included in the ground level. This can lead to inaccurate results when calculating volumes.

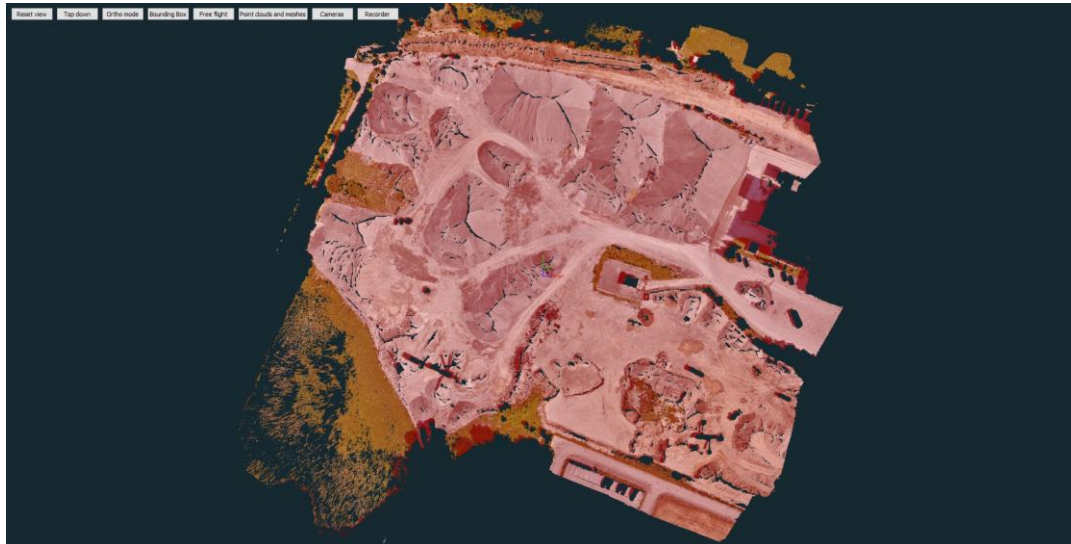

(a) Ground surface - Default Classification Settings



(b) Unassigned class - Default Classification Settings


Figure 3: Comparison of Classification Settings

To resolve this issue, we adjust the classification parameters by **reducing** the value of the **Regular Grid Mesh Cell Size** and increasing the value of the **Smoothing Max Distance**. After selecting the largest terrain regions, you will see that the tops of the stockpiles are now classified as ground surface (see Figure 4).


While these adjustments improve the inclusion of stockpile tops, they may also result in unwanted features being classified as ground surface. Non-terrain elements like vehicle tires and the lower sections of building walls might be incorrectly included.

The parameters used to include the tops of stockpiles in this case are:

- **Terrain Elevation** = 0.05 m
- **Terrain Slope** = 18°
- **Regular Grid Mesh Cell Size** = 0.25 m
- **Smoothing Factor** = 1
- **Smoothing Max Distance** = 0.08 m

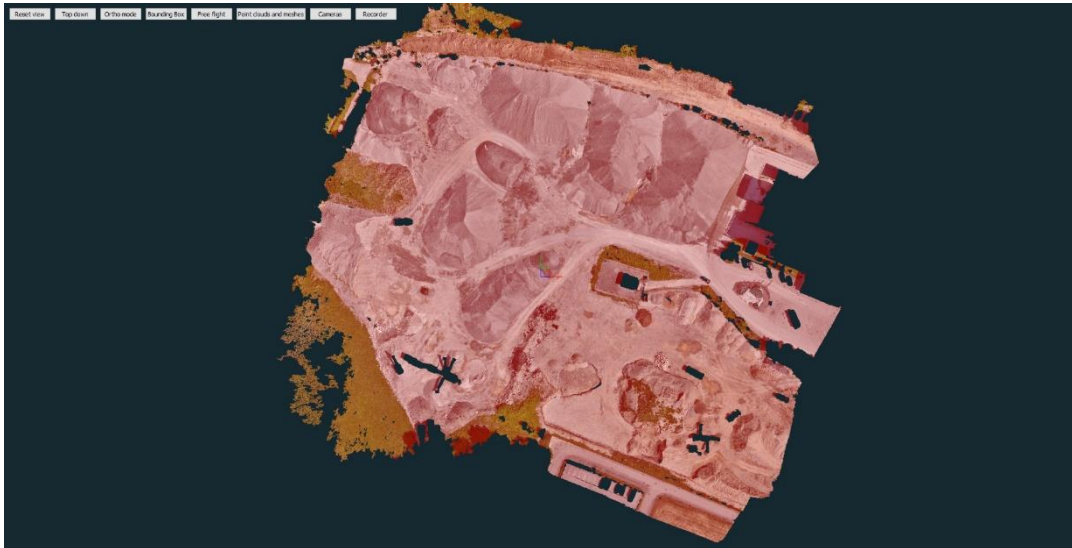

(a) Ground surface - Improved Classification Settings

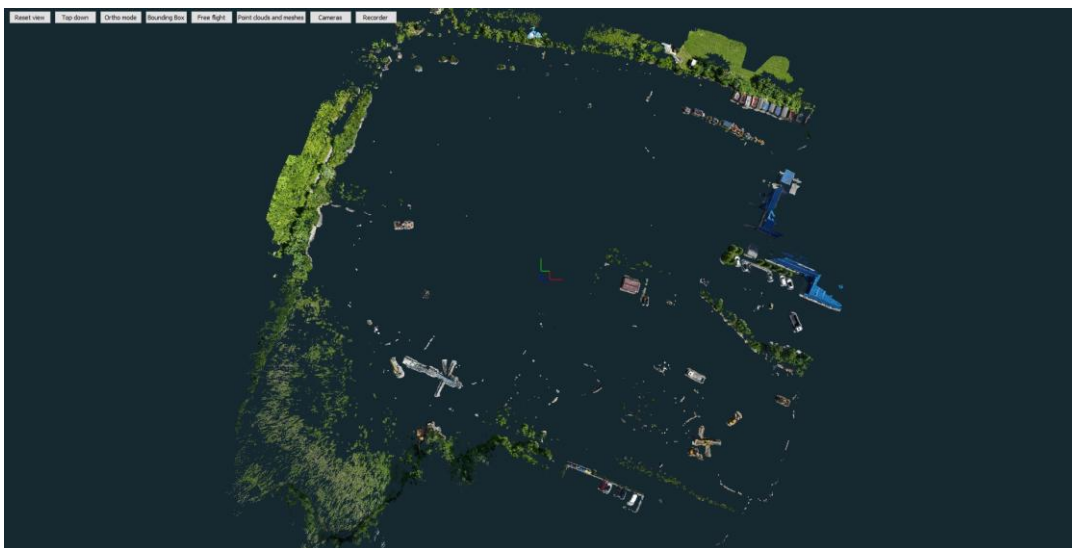


(b) Unassigned class - Improved Classification Settings

Figure 4: Comparison of Classification Settings

6.17. 2Dviews (S)


This tool is used to extract layout and sections from the point cloud.

Is suggested to calculate first the normal of your point cloud. Right-click on the point cloud name and select *Calculate normals*. For small projects as simplified size set 0, while for bigger projects you can increase this number.

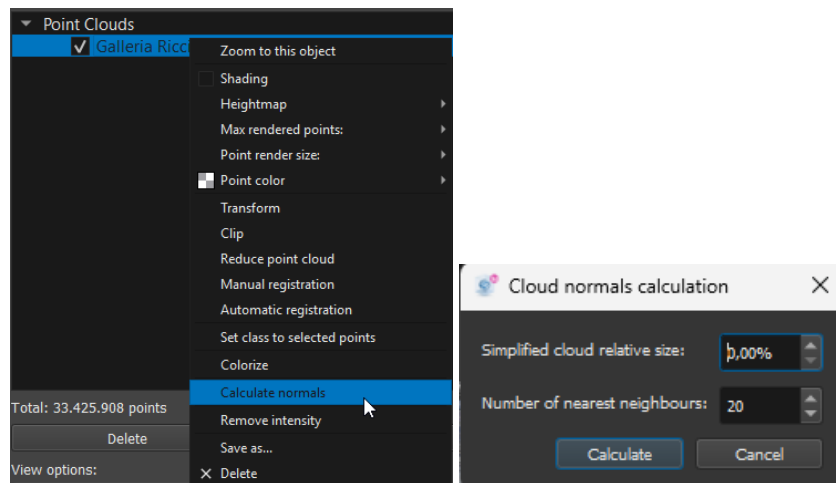



After normal calculations, click 2D views. Select the point cloud you want to use. As target resolution for one single building set 1 cm, while for multiple buildings 2 cm. Color transparency can be set between 70% and 90%.

Click generate to process the three prospective views.

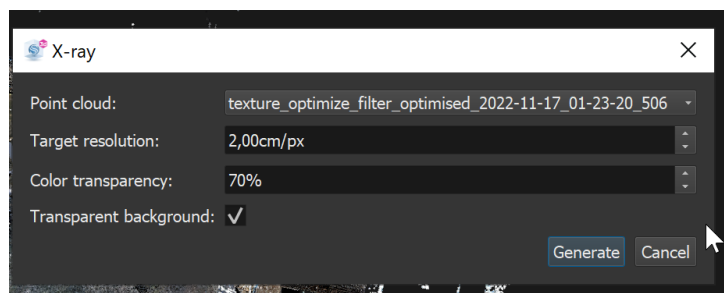


In the 2Dviews page will be visualized three prospective views Top, Front and Right. The available tools are:

-  Align model.
-  Calculate layout/section.
-  Draw Points.
-  Draw Lines.
-  Point snapper setting, in order: on point, endpoint, middle point, nearest point.
-  Block the line drawing along the X and Y axis of the object.

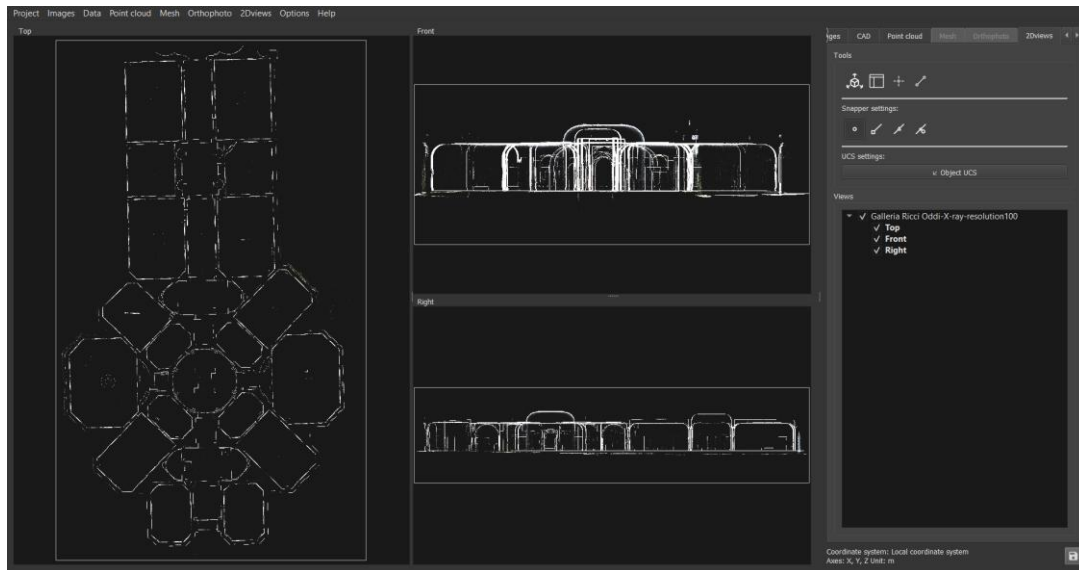


First, check the alignment of the pointcloud respect the axis. If is necessary to align the model to specific axis select the Align model tool. Choose a corner of the pointcloud, and draw the new reference axis. The three views will be recalculated, with the new alignment.

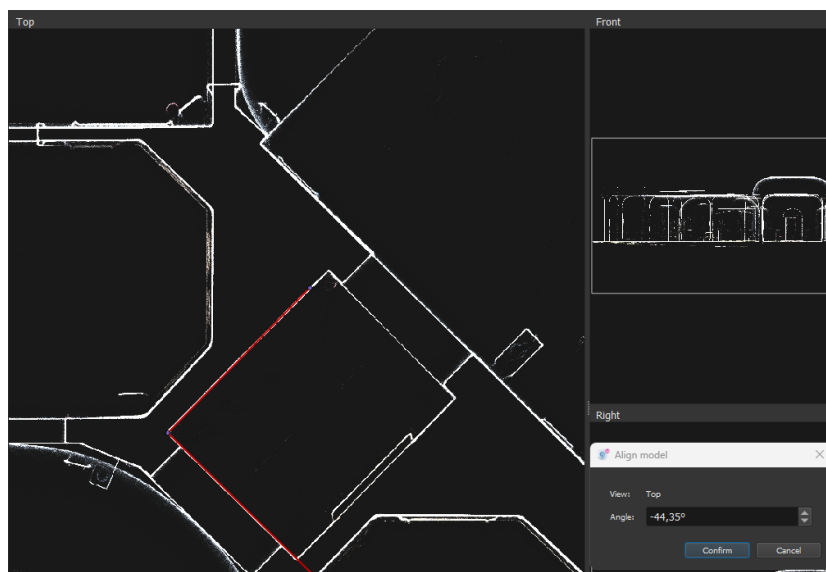


Click on the Calculate new layout/section button to draw a new cut or section. Start from the Front or Right view to create a layout, while start from the Top view to create a vertical section.

Use the mouse to draw the red central line of the cut. Define the thickness of the section that will be used to calculate the layout by choosing the perimeter of the yellow area. Is also possible to define the resolution parameters of the new layout by clicking show more. Finally, click on Confirm to calculate the layout.

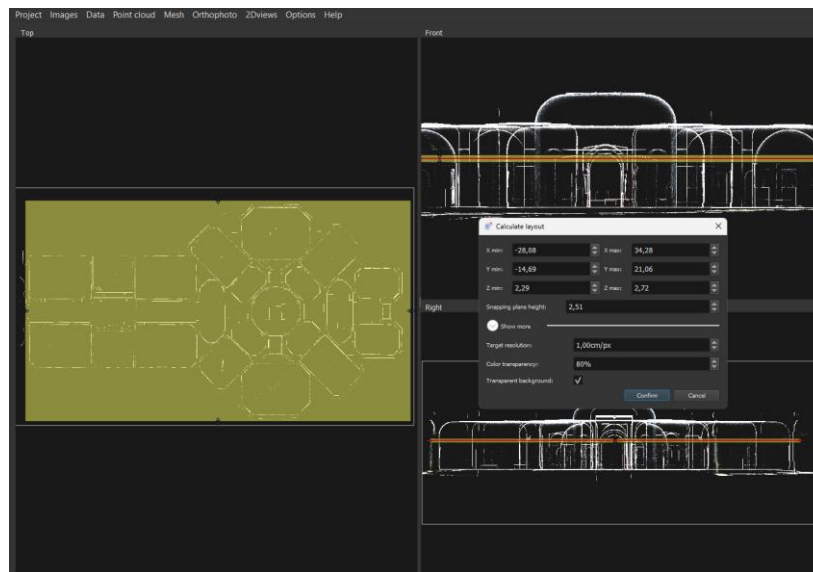

Right-click on the name of a view/layout/section to recalculate or export it:

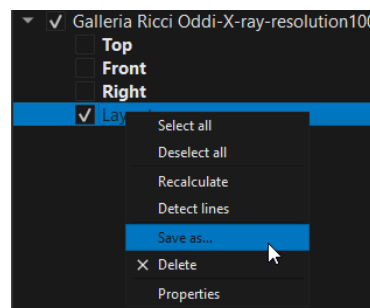


2DViews – Export formats:

Save as type: All supported formats (*.jpg *.jpeg *.jpe *.png *.tif *.tiff *.kmz *.dxf)


With the draw CAD points button, you can draw CAD points directly from a section or plan. After clicking, move the cursor over the plan and select a point. This will be saved in the active layer in the CAD section of Cube-3D.

With the draw CAD lines button, you can draw CAD lines directly on a section or a layout. Zoom the layout and start drawing by selecting positions of points that will create the vectors. When you want to end the drawing, right-click. This will be saved in the active layer in the CAD section of Cube-3D. The colour visualized will be the same one as the CAD layer.

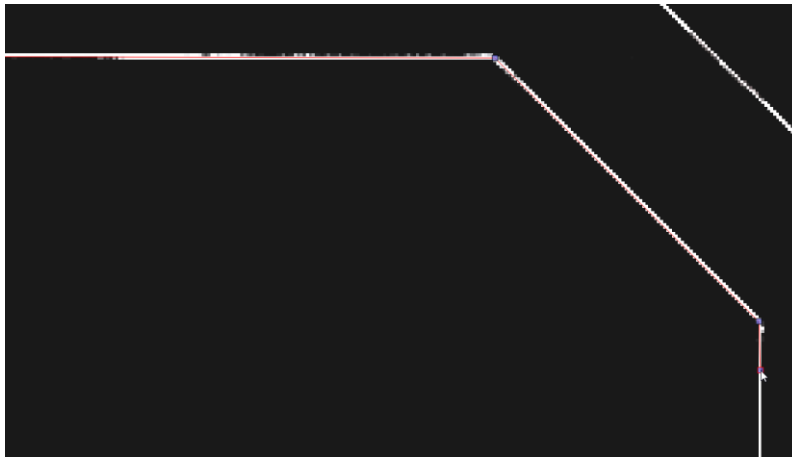


Is also possible to extract automatically vectors from layout.

Right-click on the layout name and select Detect lines. A parameter window will open. Choose the CAD layer where the vectors will be created. The threshold parameter is related to the number of the lines extracted. It is set automatically by the software to extract the 70% of the white pixels. If you need more lines reduce the threshold value.

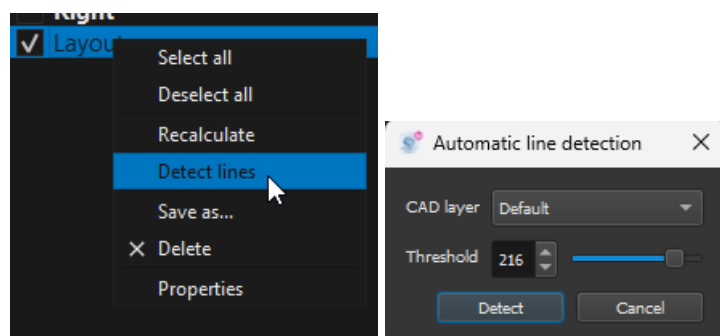


The software will create the lines. Is possible to complete the lines drawing in the 2dviews or in the CAD section.

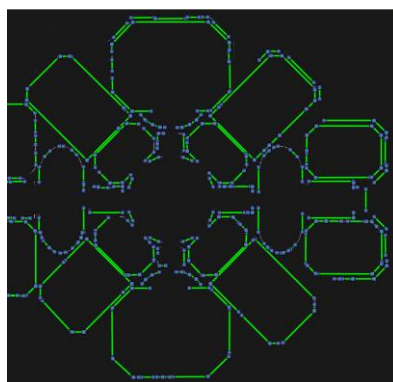

6.18. Point cloud with panoramic images (S)


In Cube-3D is possible to load point clouds with panoramic images information already saved in them. The supported format is the *.e57.

When you load a point cloud you can choose if load the images or not.

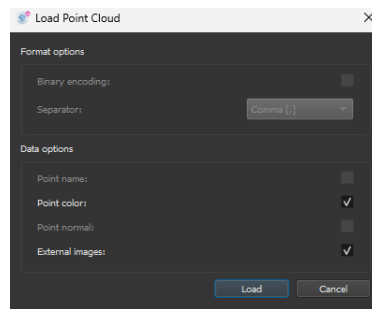

Once loaded you will see some bubbles in the correspondence of the images, and on the list, you can manage the visible bubble.

You can turn on off the bubbles and specific bubble.

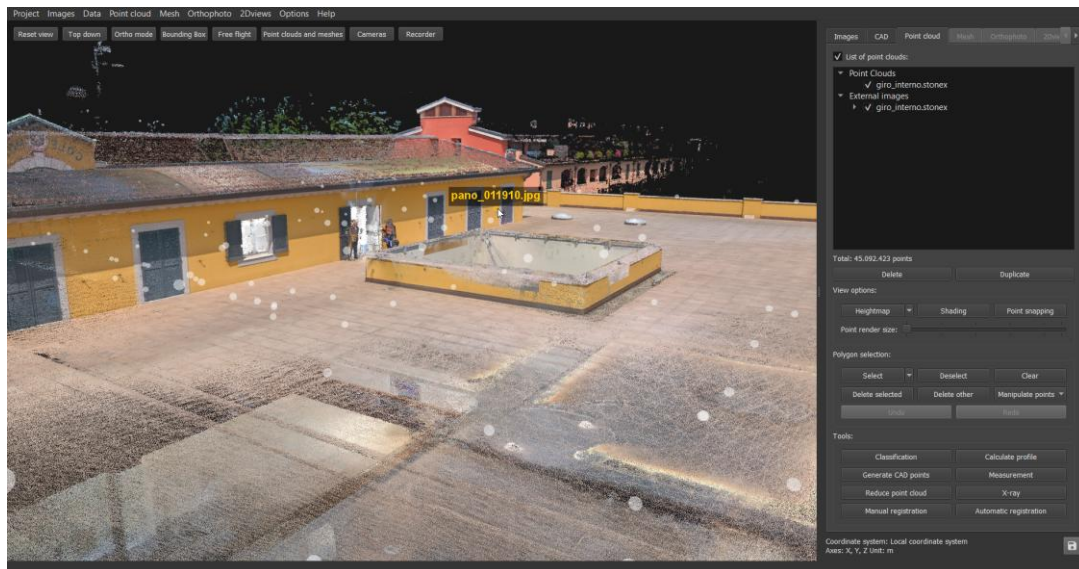

To enter an image double click on one of the bubbles. The image will open. To move in the image, hold the left mouse click and pan with the mouse. With the mouse gear you can zoom in and out of the image.



To switch to a different image, double click on another bubble.

On the images is possible to use the CAD tools. Enter the bubble, select the CAD tool of interest and start to draw on it.



Shortcuts available when using panoramic images:

Shift + gear rotation: apply a transparency to the image to see the point cloud under it.

Ctrl+W: exit the current panoramic image.


7. Mesh manipulation (PH, S)

Point clouds can be presented as 2 types of meshes:

- DSM, made from points in regular grid, that don't present overhanging surfaces.
- full 3D mesh, made from points in irregular grid, that present overhanging surfaces.


7.1. Calculate digital surface model (PH, S)

Select from dropdown list **Mesh** -> **Calculate new DSM** and set parameters.

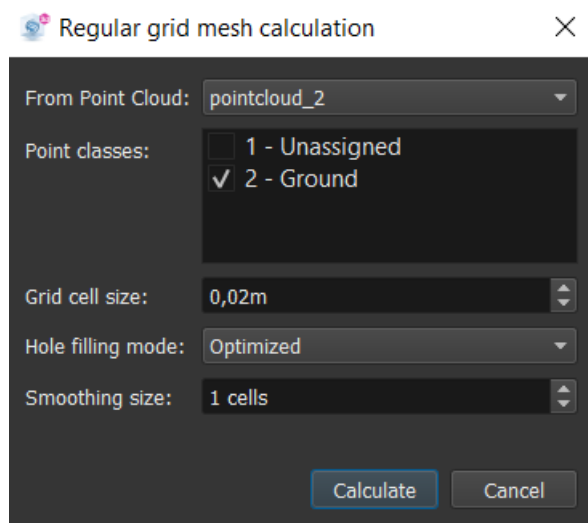


The default parameters are:

- From point cloud: select the point cloud from which to derive the DSM.
- Grid cell size: the default is the optimum value for the software.
- Hole-filling mode: choose between All, Optimise or None.
- Smoothing size: the number of cells on which the software will perform the chamfer calculation.

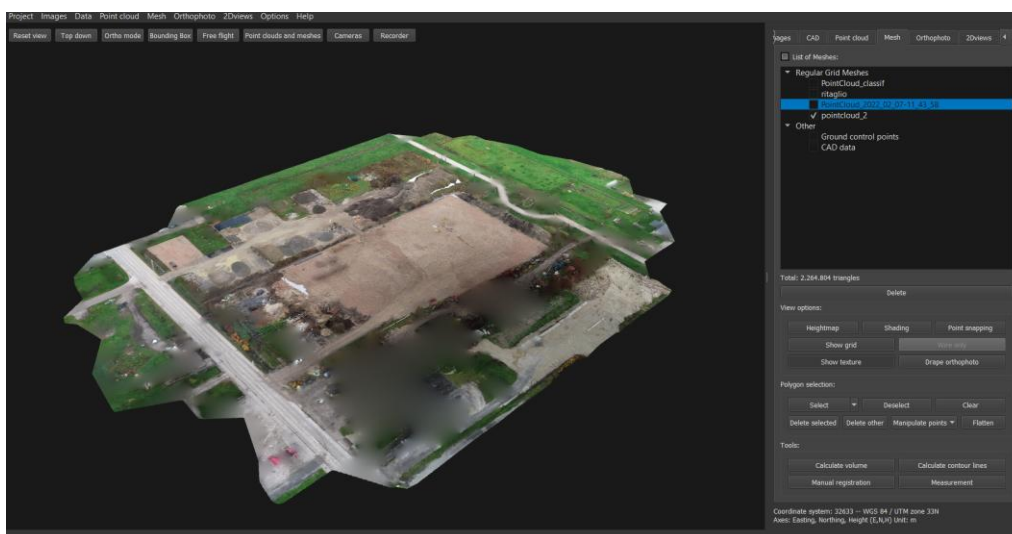

The higher the smoothing parameter, the smoother the surface will be. Comparison of three DSMs shows that higher **smoothing size** gives smoothest surface. Selected models present the effect of three *smoothing sizes*:

- 10 cells (red) – the smoothest
- 5 cells (purple) – semi-smooth
- 1 cells (blue) – the least smooth.

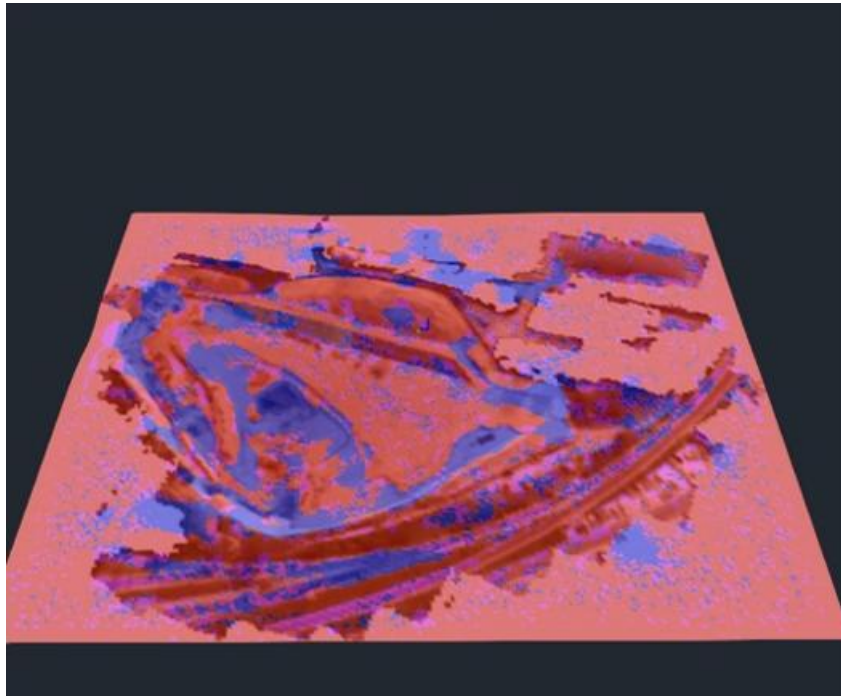


To export computed Meshes, you need to do it on at a time. First view just the one, you wish to save. Select from dropdown list **Mesh** -> **Save as**:

- *.ply – default Stanford mesh file
- *.dxf – DXF drawing exchange format
- *.txt – text file
- *.koo – file of coordinates,
- *.xyz – text file,
- *.stl – stereolithography format,
- *.obj – Wavefront OBJ format,
- *.dae – Khronos COLLADA format,
- *.xml – landXML construction format,
- *.tiff *.tif – TIFF image format with georeferencing (only for DSMs)

7.2. Calculate texturized full 3D mesh (PH, S)

* *texture is only applicable for models obtained from photogrammetry. It is however possible to calculate a full 3D mesh from a LiDAR point cloud.*

Select from dropdown list **Mesh**-> **Calculate new Mesh** and set parameters.


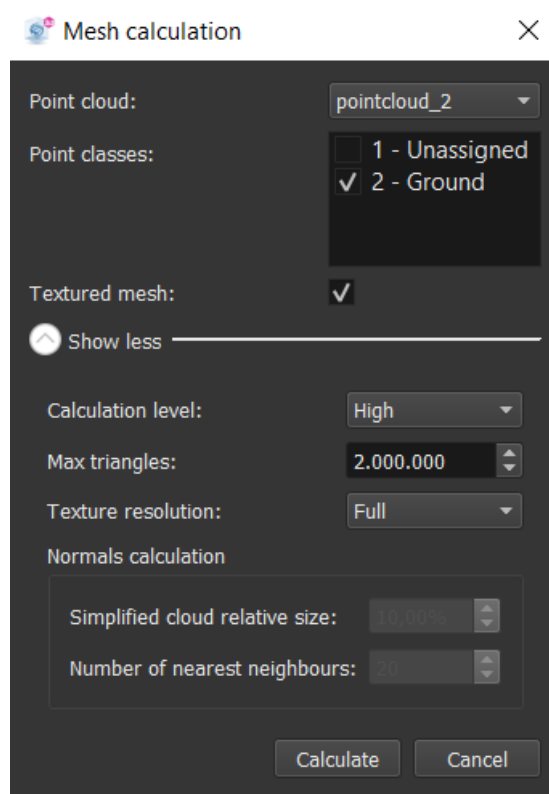


Most commonly used, default parameters are:

- Calculation level: Medium
- Maximal number of triangles: 2.000.000
- The highest number of triangles can be set to 10.000.000 and allows you to make most completed 3D mesh.


Comparison of four Meshes shows that higher **Calculation level** gives completed – most detailed surface at the same maximal number of triangles. Selected models present the effect of four *calculation levels*:

- low (purple) – the smoothest surface without edges
- medium (blue) – smoothest approximation of edges
- high (turquoise) – half smoothed edges
- extreme (green) – sharp edges with barely smoothed surfaces

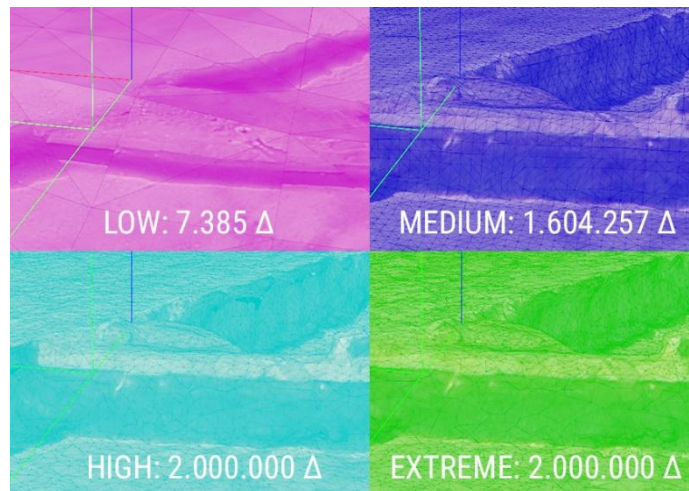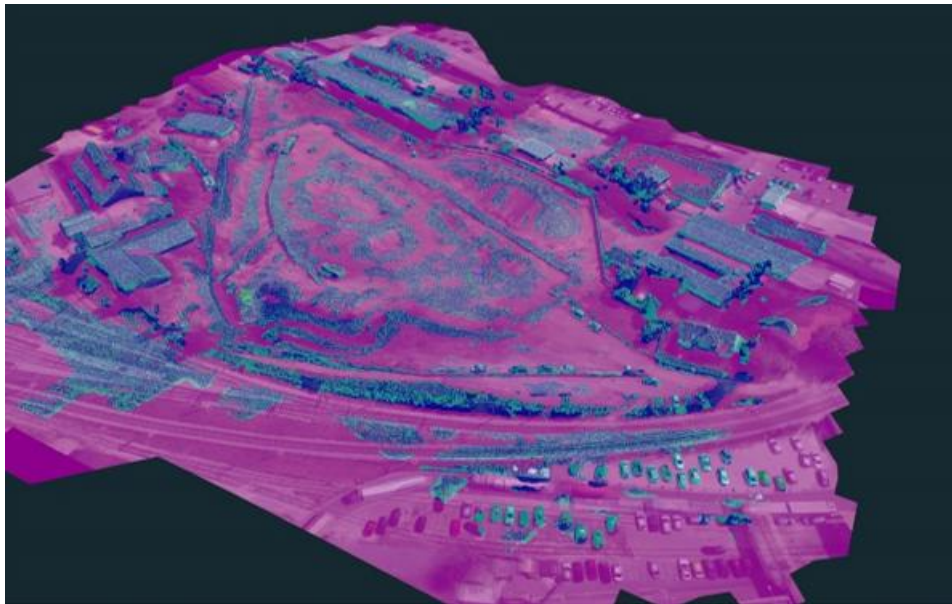

7.3. Draping digital orthophoto (PH)

For better visualization and spatial presentation, multiple Orthophotos can be plastered on top of multiple DSMs. Go to Mesh tab and select function Drape Orthophoto.

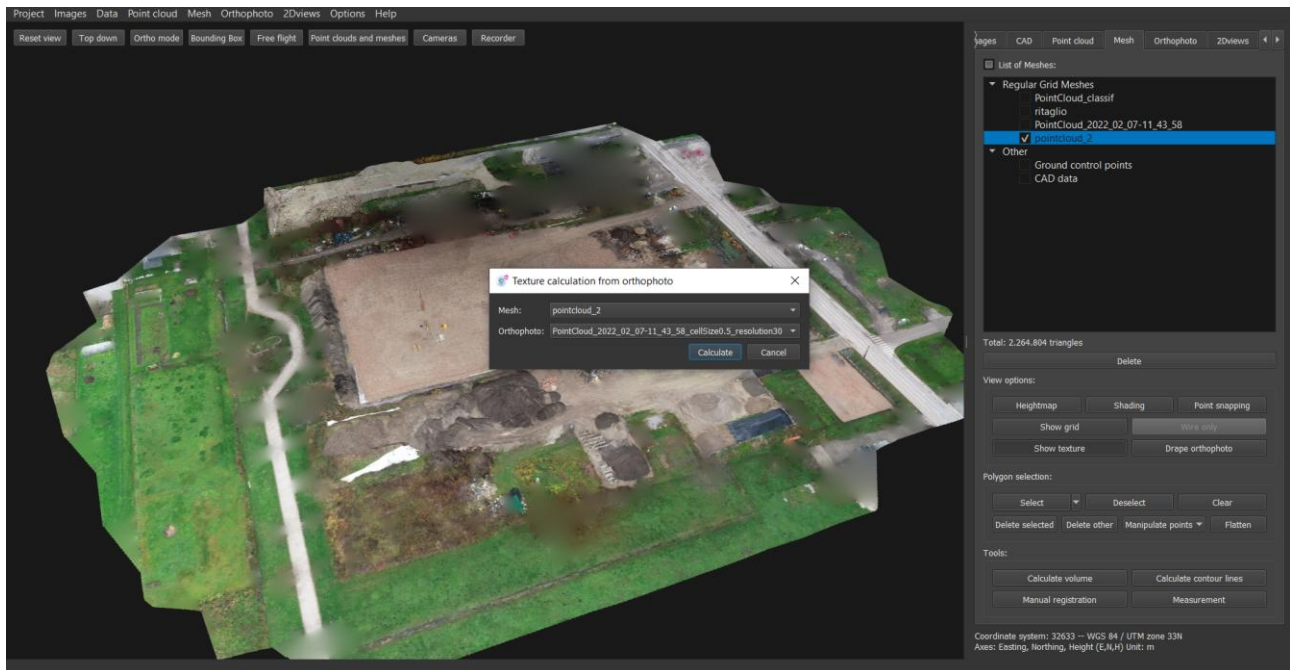

Set preferred combination of orthophoto and DSM. Remember, only DSM can be used for draping. Below is a comparison between non-textured and textured mesh.




As orthophoto is plastered on top of regular grid mesh, function **Show texture** becomes activated.

7.4. Show texture (PH)

Viewing of plastering of true or traditional orthophoto on top of full 3D or regular grid mesh can be memory consuming.


Use **Show texture** function to manage texture-viewing ability.

By right-clicking on a mesh, it is possible to activate or deactivate a reduction in texture quality by selecting "Texture compression". It always reduces the use of computer memory.

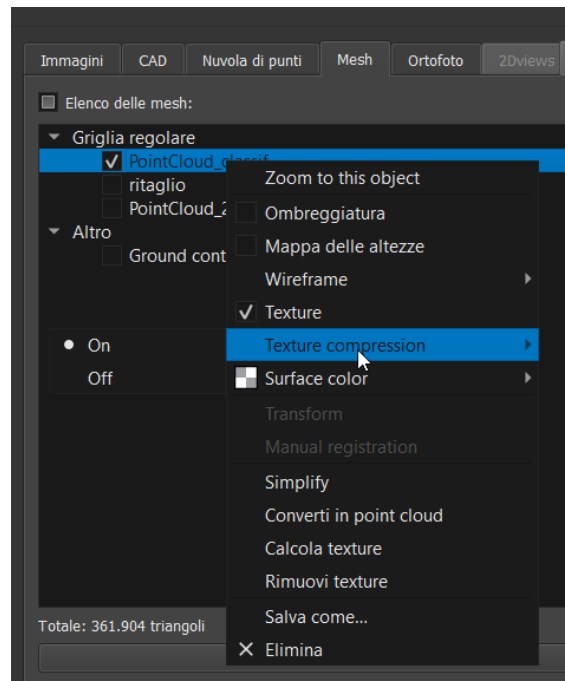

7.5. Show grid (PH, S)

If you want to see wire surface of undraped DSM, click **Show grid** button

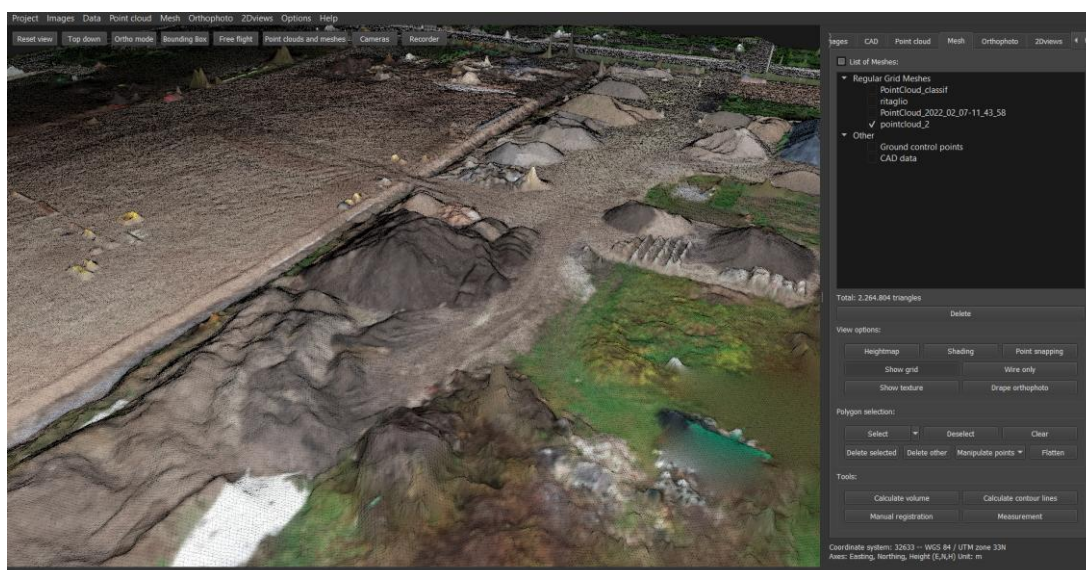

7.6. Wire only (PH, S)


If you want to see wire of undraped DSM, click **Wire only** button.




7.7. Flatten (PH, S)

Check for any objects that you would like to filter out of the model.

First **select** recognised masses extended to surrounding area with preferable height. To eliminate masses, use function **Flatten**.

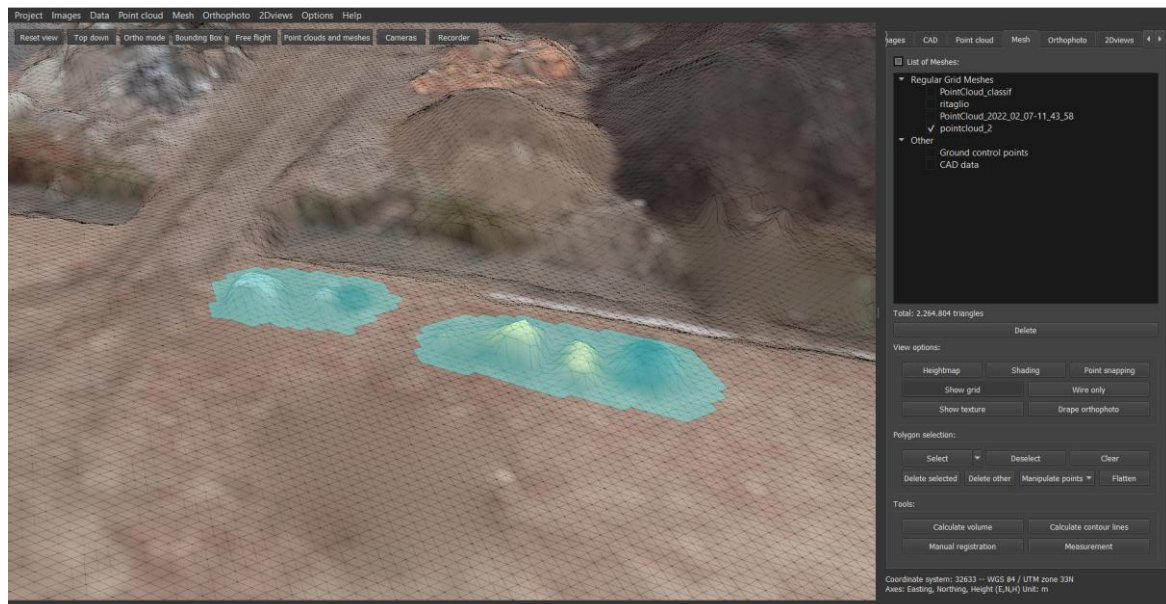

After *Flatten*:

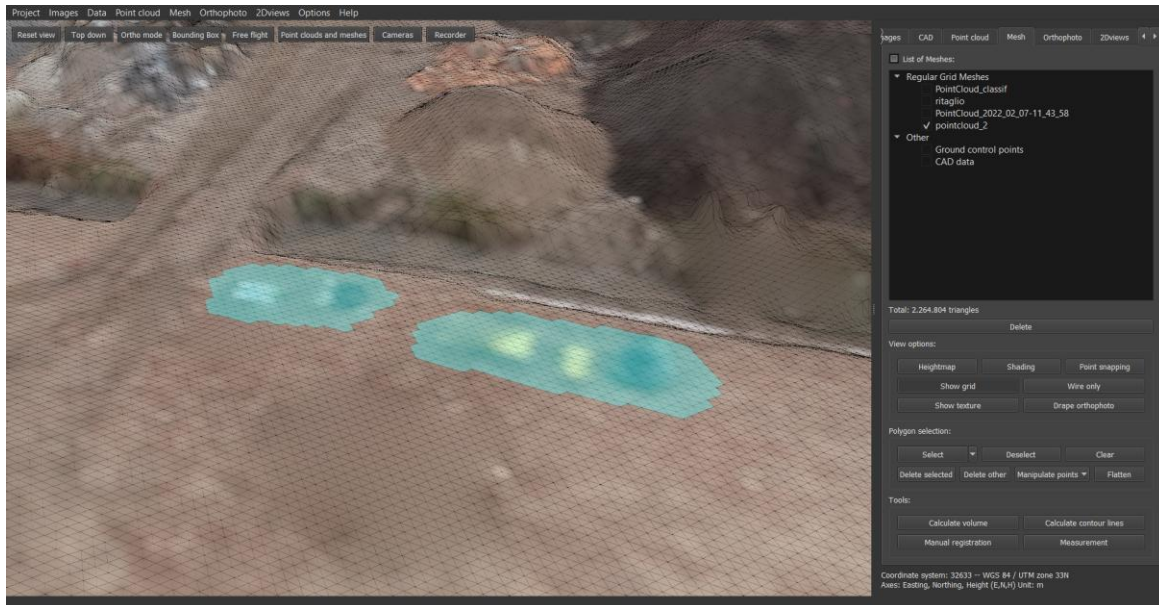


7.8. Volume calculation (PH, S)

Volume calculation based on interpolated surface: Calculate volume of material for single measurement - appropriate for the calculation of dredged material.

How?

Calculate or **load point cloud** of selected area -> Click **Mesh** -> **Calculate New** DMS and set calculation parameters as shown in Option settings. Now you have two options for selecting area of interest:

1. Manual selection using the selection function.
 - Click on the Select button and select the area for volume calculation with a left mouse click. To end the selection, click the right mouse button.
 - To calculate the volume on the selected area, click on Calculate Volume.
 - For the initial surface, use the default value Interpolate surface.
 - For the final surface, select: Calculated DSM.
 - Click on from current selection to calculate the volume of the selected area.
2. From a .dxf file using the CAD functionality for repeated or detailed use:
 - To calculate the volume of the area, defined by the dxf boundary, click Calculate Volume.
 - For the initial surface, use the default value Interpolate surface.
 - For the final surface, select Calculated DSM.
 - Click From DXF and open the desired file.

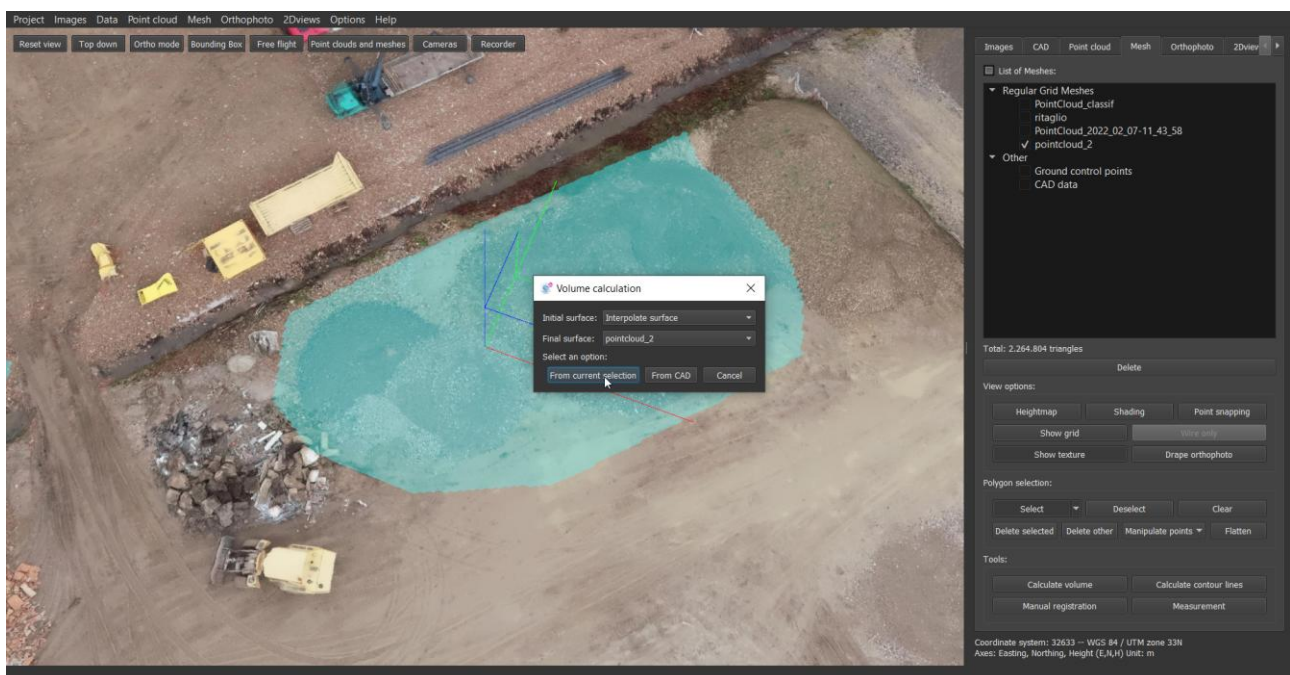


When *Calculate volume* is in process, the initial surface will be generated first, based on points closer to the edges of selections! Volume is calculated as subtraction of two surfaces.



Displayed results present values for both current volume selection and a total sum of all volumes, consisting of:

- Fill – volume of needed mass to fill holes beneath mean surface.
- Cut – volume of mass above mean surface
- Total – sum of filled and cut volume
- Area 3D – three-dimensional area of selected surface
- Area 2D – horizontal area of selected surface

Select **Volume** from the *Working panel* to observe all calculated volumes. Areas of volume calculation are presented as cuts from **draped DSM**, each with its own title. If **Contour lines** are visible, their cuts are also presented. You can **select**, **deselect** and **remove selected** volumes.

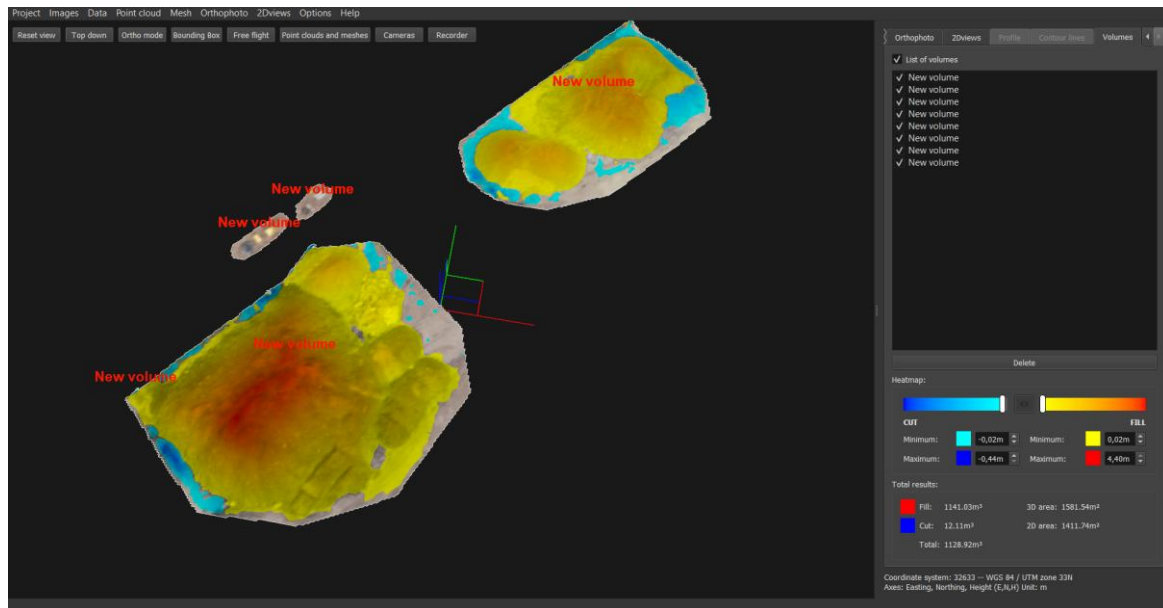

Volume calculation based on two consecutive measurements: Ideal for monitoring on construction site. Measure the volume difference between two consecutive measurements.

How?

Calculate or **load two point clouds** the area you would like to calculate -> Click **DSM** -> **Calculate New** and set DSM calculation parameters as shown on the image below.

Now you have two options for selecting area of interest:


- Manual selection of the calculation area using the selection function. Click on the **Select** button and select the area for volume calculation with a left mouse click. To end the selection, click with the right mouse button. To calculate the volume on the selected area, click on **Calculate Volume**. For the initial area, select the initial area for the final area, select the final area Click on **from current selection** to calculate the volume of the selected area.




- Use a CAD .dxf file as a contour. To calculate the volume of the area defined by the .dxf boundary, click **Calculate Volume**. For the initial surface, select the initial surface. For the final surface, select the final surface. Click **From CAD** and open the desired file.

Displayed results present values for both current volume selection and a total sum of all volumes, consisting of:

- **Fill** – volume of needed mass to fill holes beneath mean surface.
- **Cut** – volume of mass above mean surface.
- **Total** – sum of filled and cut volume.
- **Area 3D** – three-dimensional area of selected surface.
- **Area 2D** – horizontal area of selected surface.

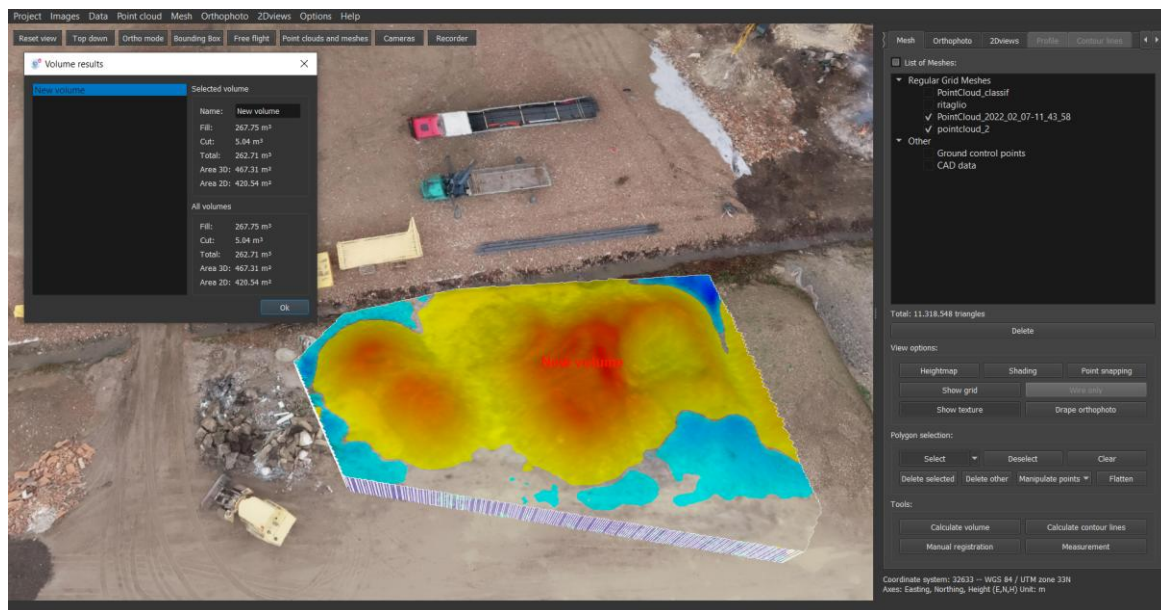


To remove a volume, go to the Volumes page, select the volume to be deleted and press delete.

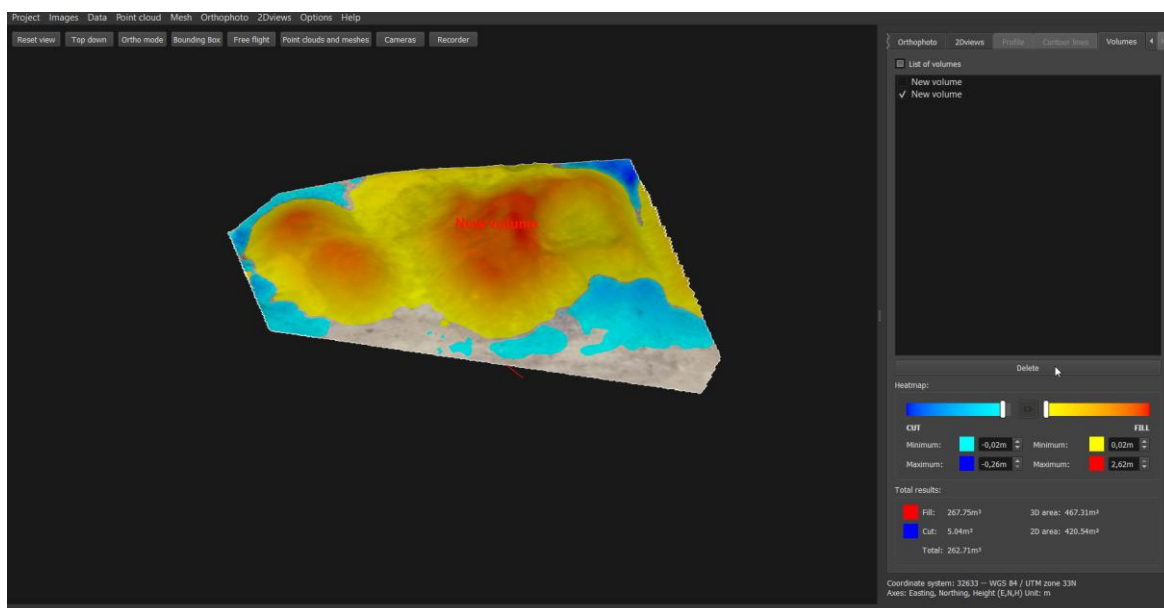


7.9. Calculate contour lines (PH, S)


Click button **Calculate Contour lines**. Select desired equidistance in the pop-up window. Check simplify if more smoothed lines are needed.

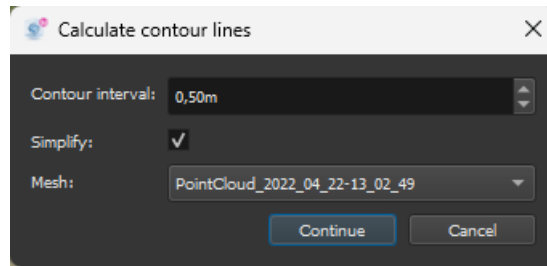

Calculated contour lines are displayed on the DSM. To export, go to **Contour lines** tab in *Working panel*.

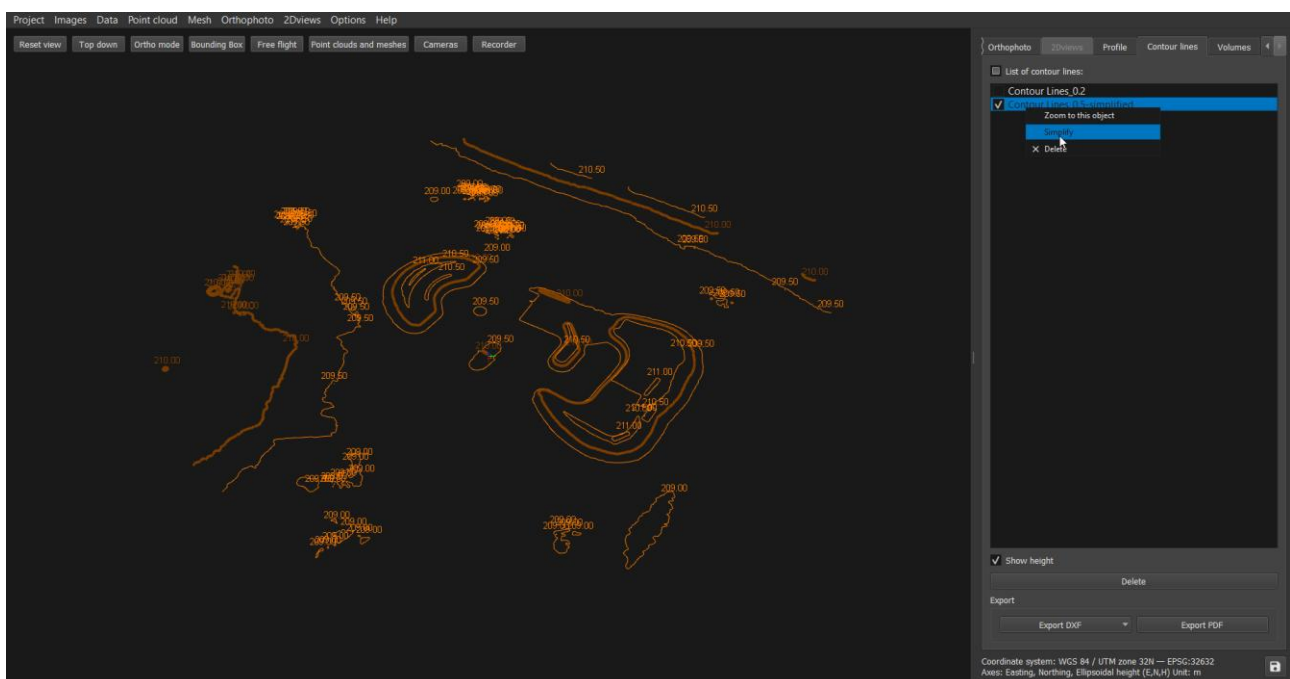


Contour lines' height can be displayed by checking **Show height** box. If you right click on the contour line name, is possible to simplify again the result. To **export** contour lines, choose between ***.DXF** and ***.PDF** data types. A new window, titled **Save contour lines as DXF** or **Save contour lines as PDF**, pops up. Enter desired file name and click **save**. New window with exported file path pops up.


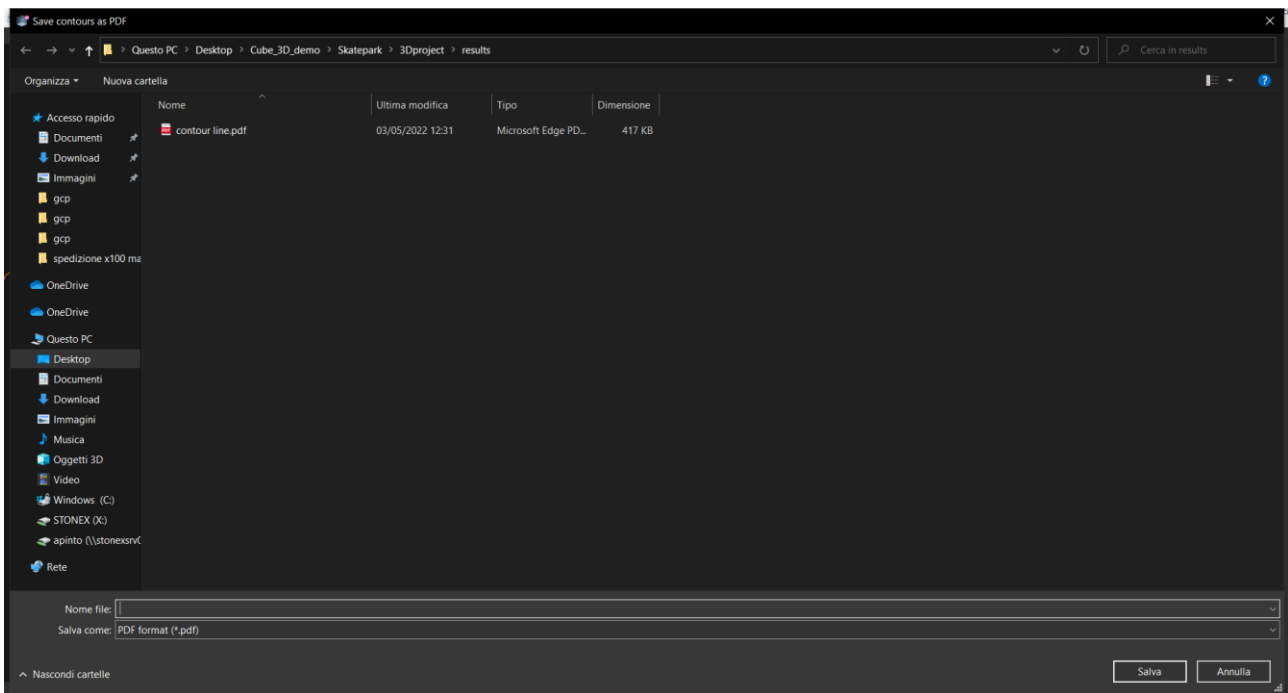


7.10. CAD projections on mesh (PH, S)

If the CAD layers imported in the software does not have the correct height information, is possible to project them on a mesh. Right-click on the mesh name and select **Project CAD on mesh**.

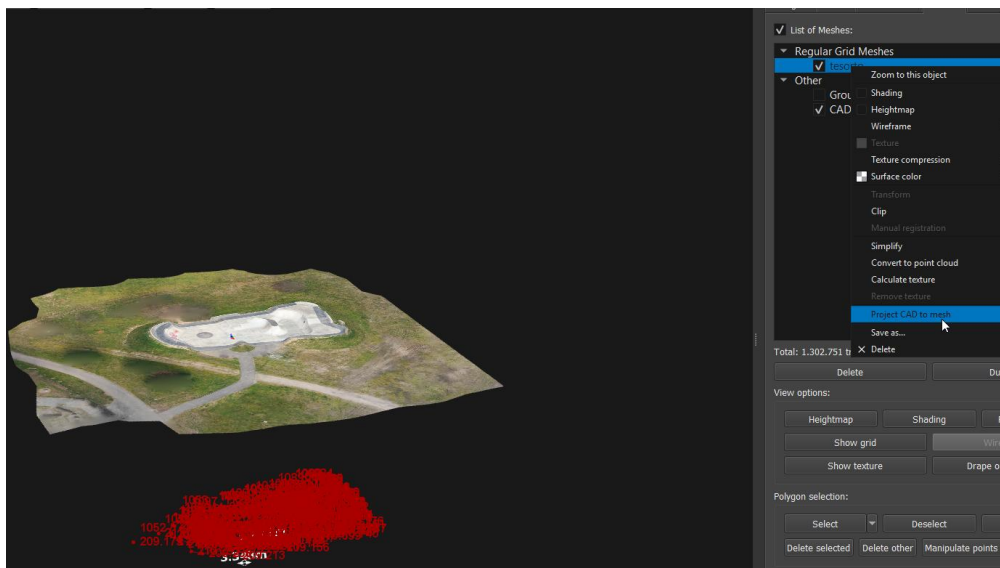

You can choose the layers to be projected, and how to snap the vertex on the mesh if on lowest or highest point. After the projection the points will be overlapped with the mesh.

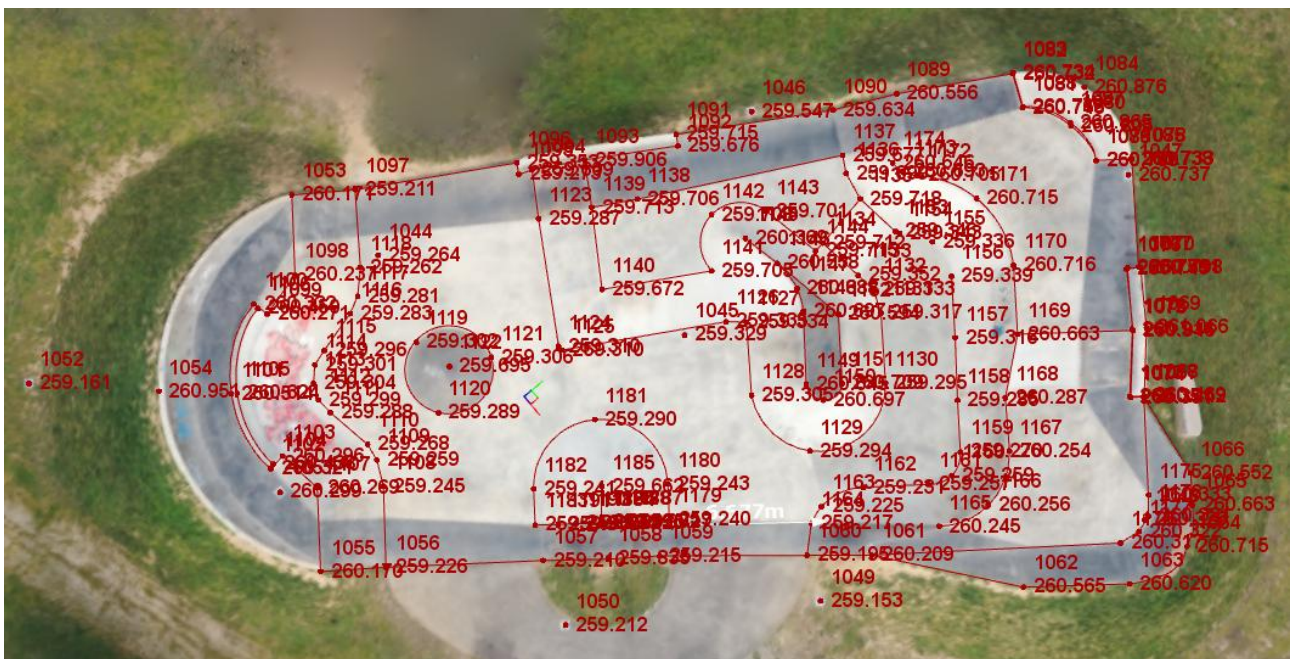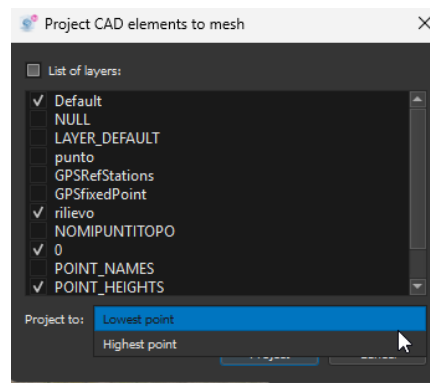

7.11. Delete (PH, S)

Tick Mesh data, you would like to delete from application and click **delete** button.


8. Digital orthophoto (PH, S)

Cube-3d offers computation of two types of orthophoto:

- original orthophoto based on regularly gridded mesh
- true orthophoto based on irregularly gridded full 3D mesh


8.1. Digital orthophoto calculation top-down (PH)

Select from dropdown list **Orthophoto** -> **Calculate new**.

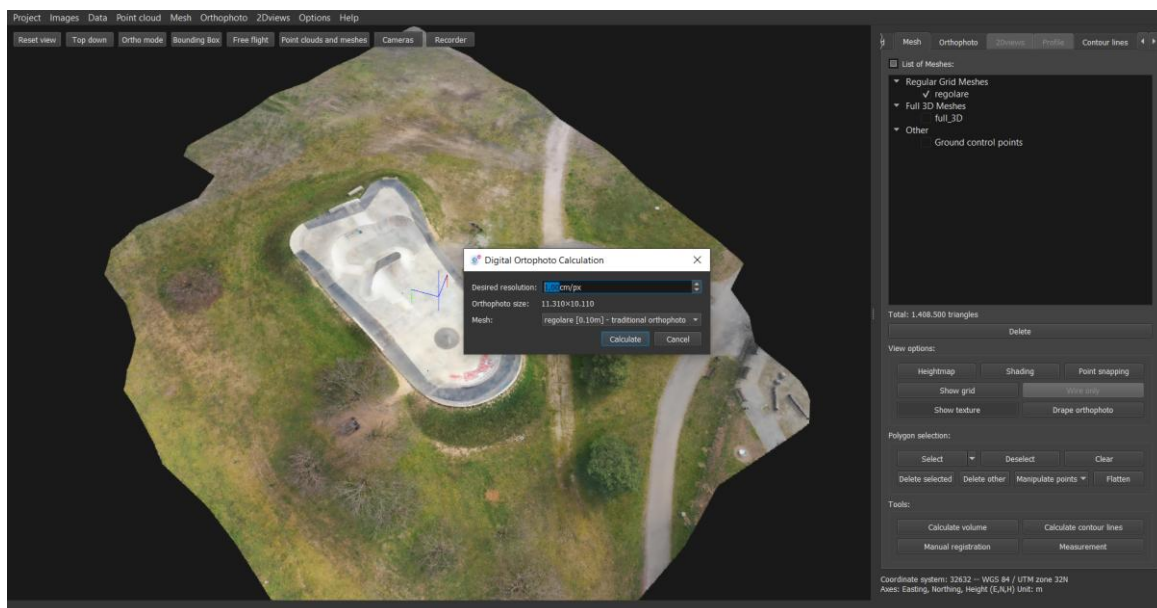

Set parameters in a **Digital Orthophoto Calculation** pop-up. First, set **Desired resolution**. As entered value may not be possible to compute, **Actual resolution** is presented below to inform you about the closest available result. It is an outcome of entered desired resolution and DSM cell size based on selected **DSM**. Click **more** to check the **split DOF** box. Default **Tile maximum size** is set to 20.000, meaning DOF will be split if it exceeds 20.000 pixels. When set, click **Calculate**.

In the panel called **orthophoto**, will be visualized all the calculated orthophotos.

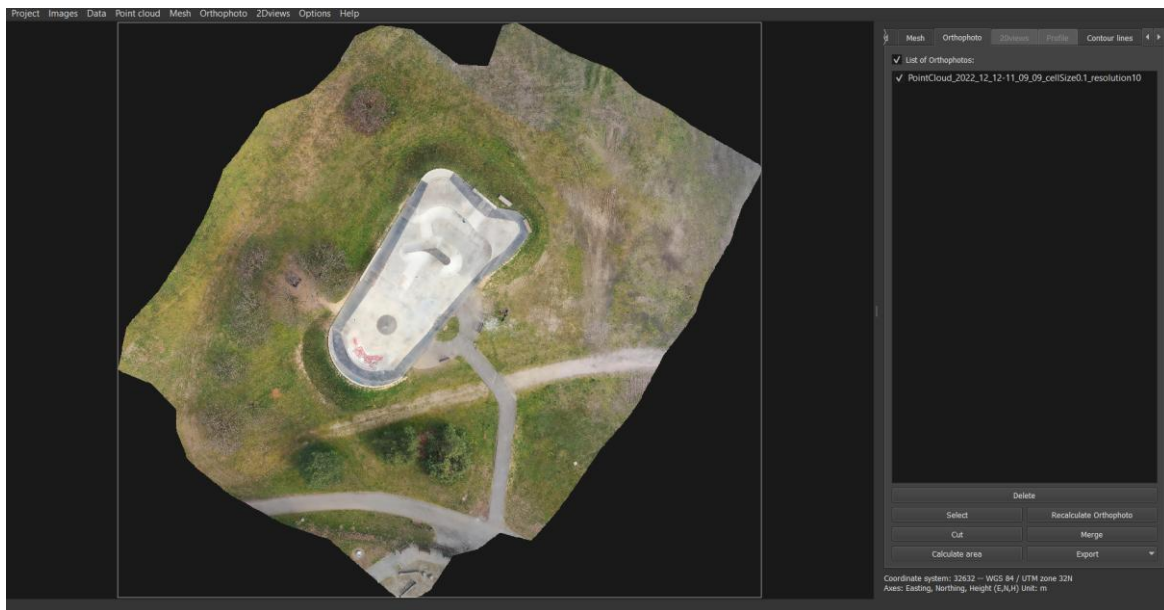


To save the orthophoto, click on **Export** and choose between PDF or image. The following formats are available as images:

*.jpg *.jpeg + *.jgw

*.tif *.tiff + *.tfw

*.png + *.pgw

Whether you export as an image or, as a PDF, you can decide the area to be saved, whether to include measurements, such as volumes or profiles, as well as having specific parameters depending on the output format.

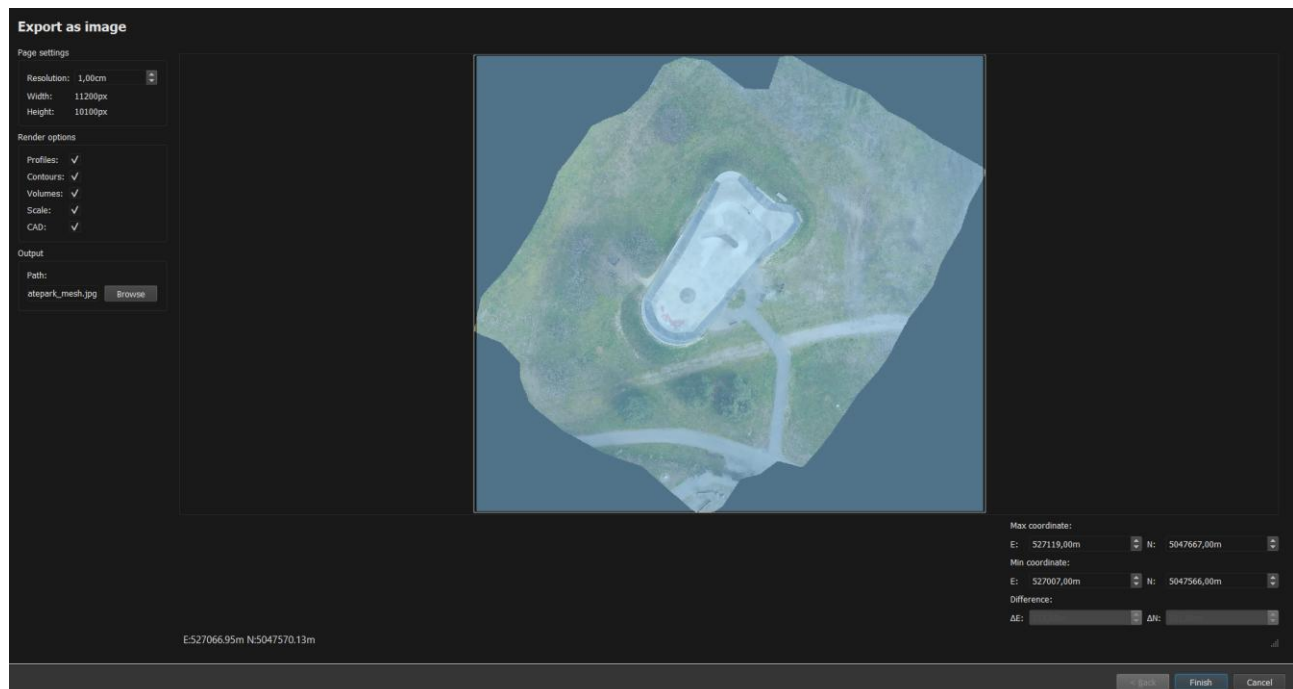


8.2. Digital orthophoto corrections (PH)

To calculate digital Orthophoto follow steps from 1 to 11 (page 2- 21). If you are not satisfied with results, you can use correction tools to improve them. Because of low flight altitude, often artefacts on roofs of the houses will appear. You can easily correct them with Recalculation orthophoto tool.


Note: Simply loading your Orthophoto into Cube-3d is not enough for Recalculate orthophoto function. To be able to recalculate, one needs to go through the whole process for orthophoto calculation.

How?


When your Orthophoto is calculated, select the areas you would like to recalculate. Use **Select** button and select preferred images.

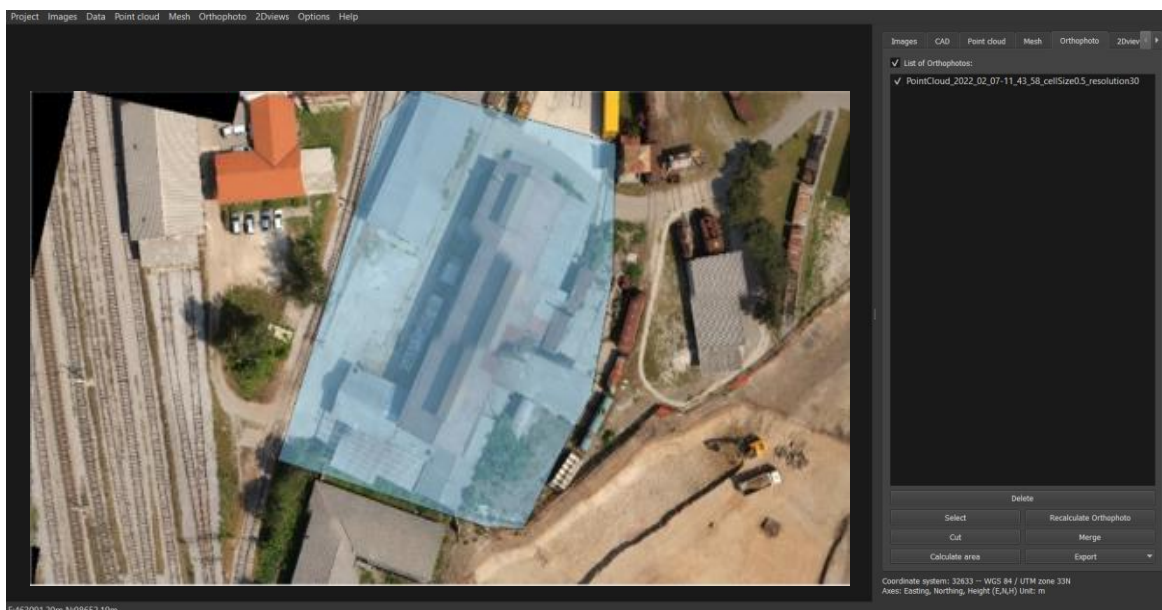

Wizard for image selection, with images of selected area will appear – **select** the **image** you would like to use for recalculation and click **Confirm**.

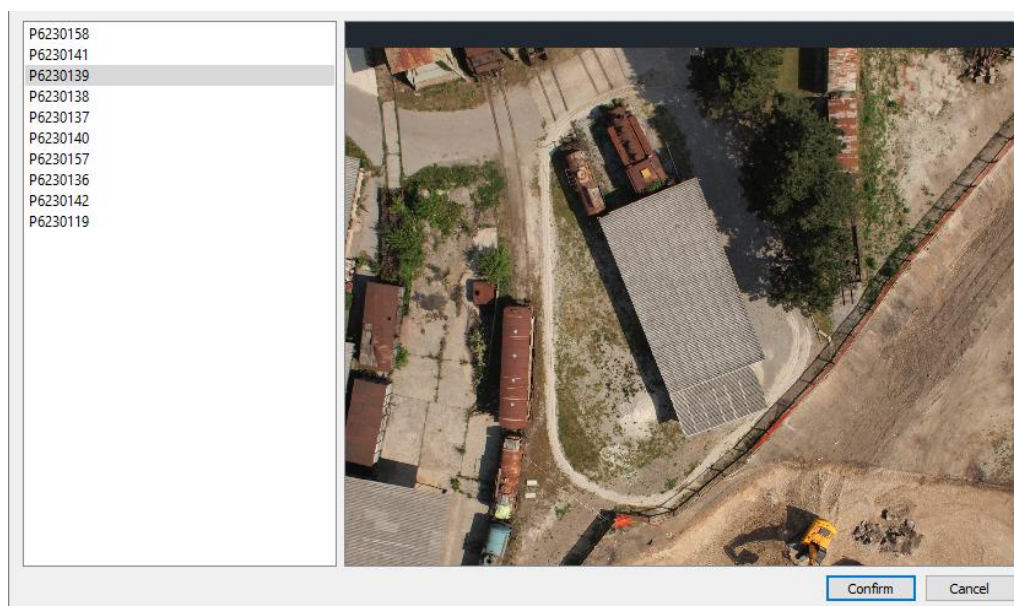


In case of additional artefacts repeat the same process to select all the areas. When you are finished with selecting click **Recalculate orthophoto** button.

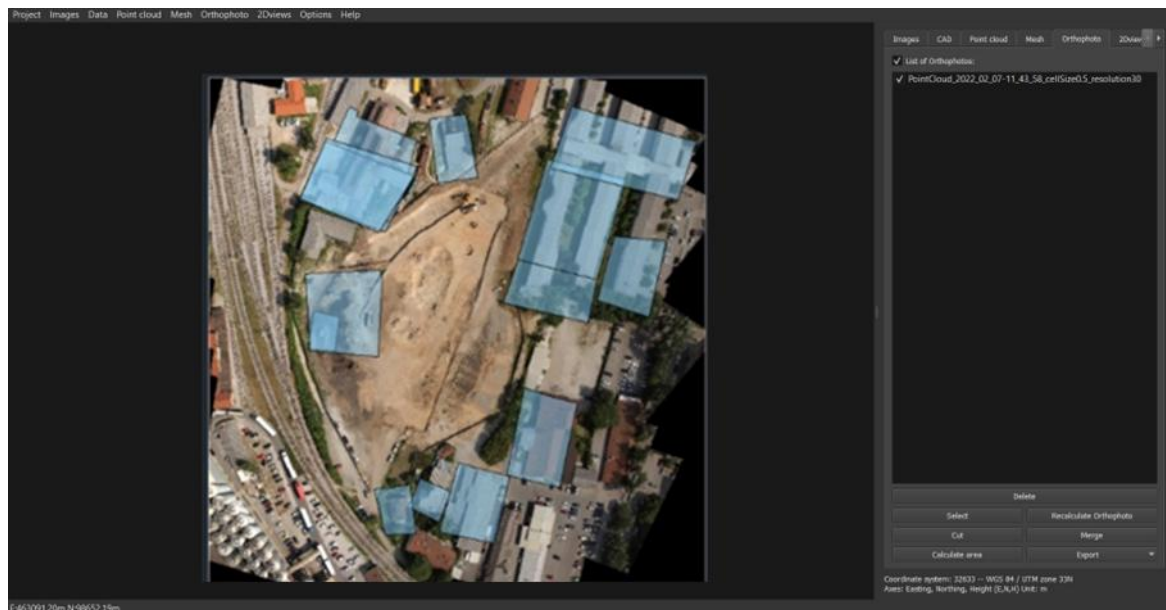

Results:




Before

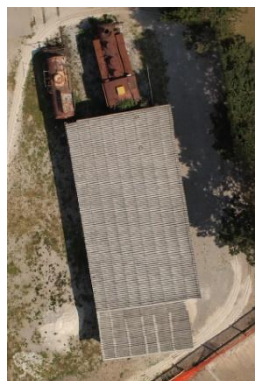


After

8.3. Cut orthophoto (PH, S)

You can also cut certain area out of the DOF and save it as another DOF. Click Cut.

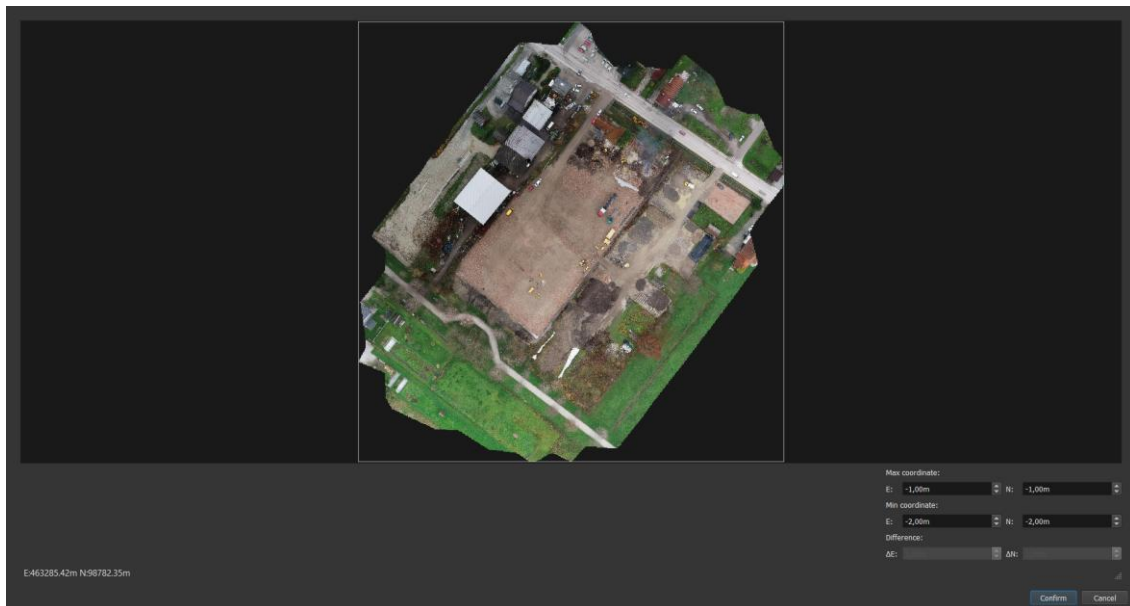

Select desired area. Left mouse click to start drawing rectangle and drag mouse to select rectangle over desired area. You can observe coordinate values in left bottom corner and coordinate range of selected rectangle.

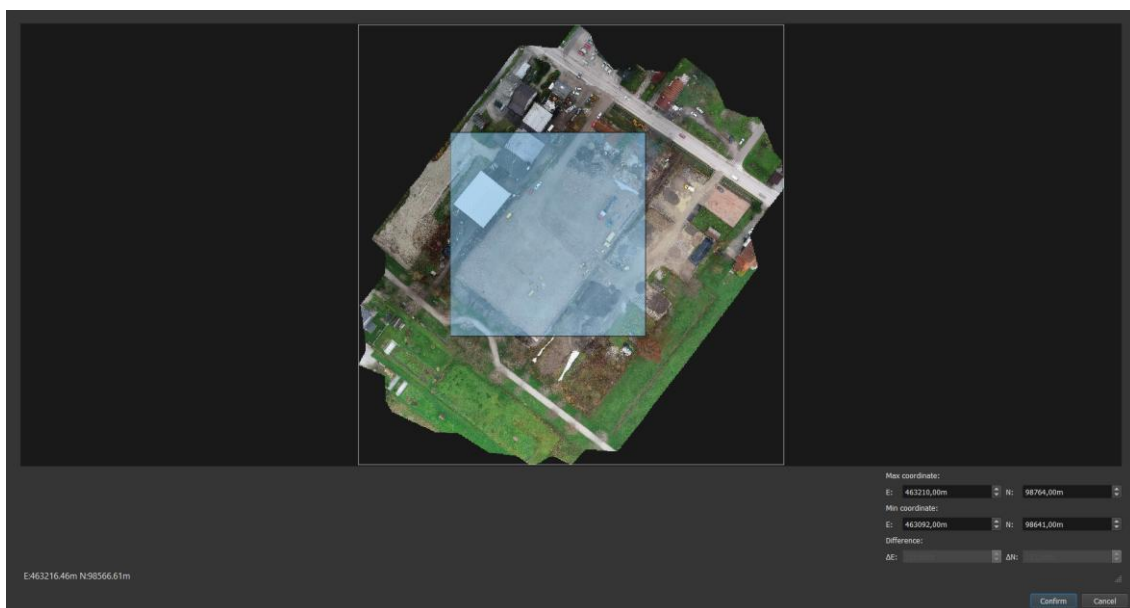


When area of interest is selected, click **confirm** to calculate the orthophoto cut.

8.4. Merge orthophoto (PH, S)

Merge is a function that merges two orthophotos that don't need to overlap or even converge.


Load or select desired orthophotos and click **Merge**.

In a pop-up window, **select** the area you want to merge. Left click on one end and set the rectangle across interested area. Click **Next**.

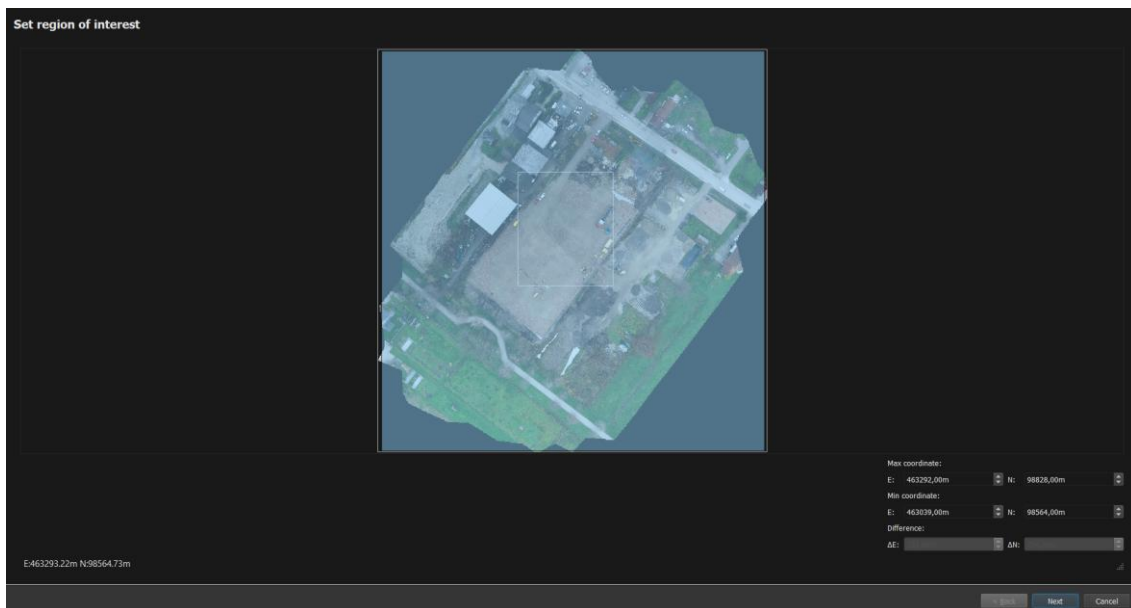

If you click on an orthophoto on the right side, it will be displayed. You can select a specific area of the orthophoto with the **select area to merge command**. Click on the **Paste orthophoto** button to paste the selected part onto the new orthophoto. Click on the next orthophoto in the list to set its transparency by adjusting **Alpha**. **Select** the desired area on the second image - the Alpha adjustment shows the merging boundaries. The **Blending Size** allows you to smooth the edges between the overlapping parts. When all parts are merged, click on **Finish**.


When the merging finishes, the new orthophoto (merged) is displayed.

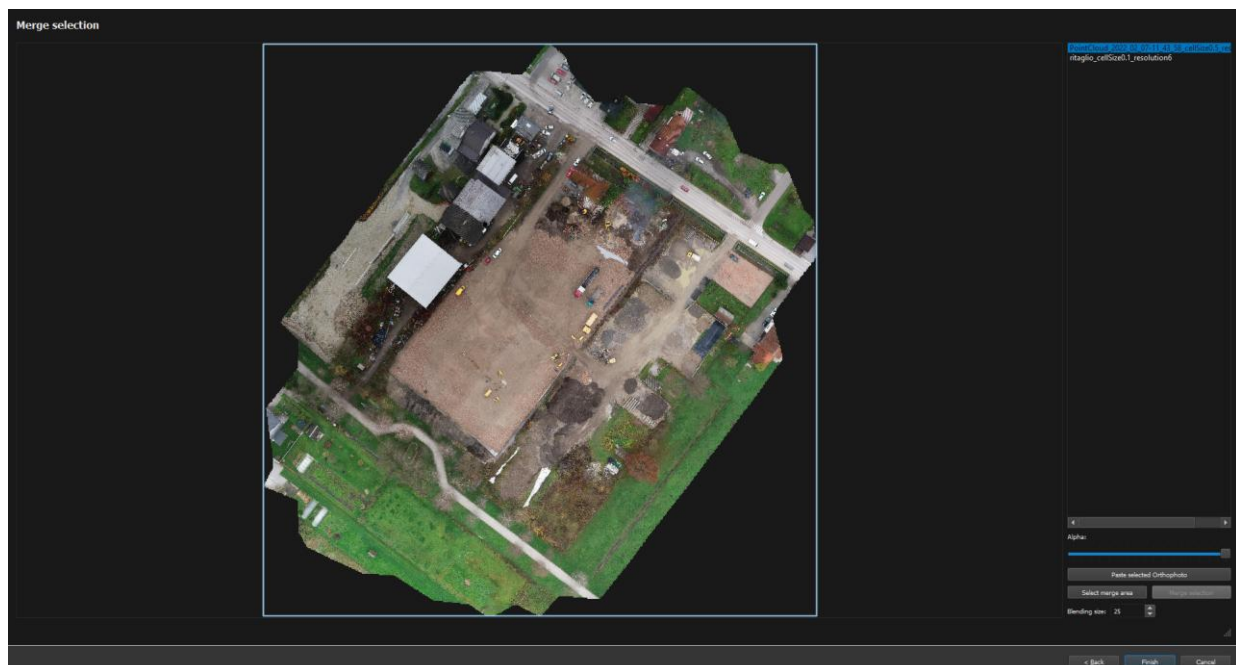

8.5. Calculate area (PH, S)

Click **Calculate area** button to compute area on the orthophoto. Select area with polygon using left mouse click to determine points and right one to close it. Area result, will popup:

- Area – planimetric area of selected region,
- Perimeter – circumference of selected region or length of polygon

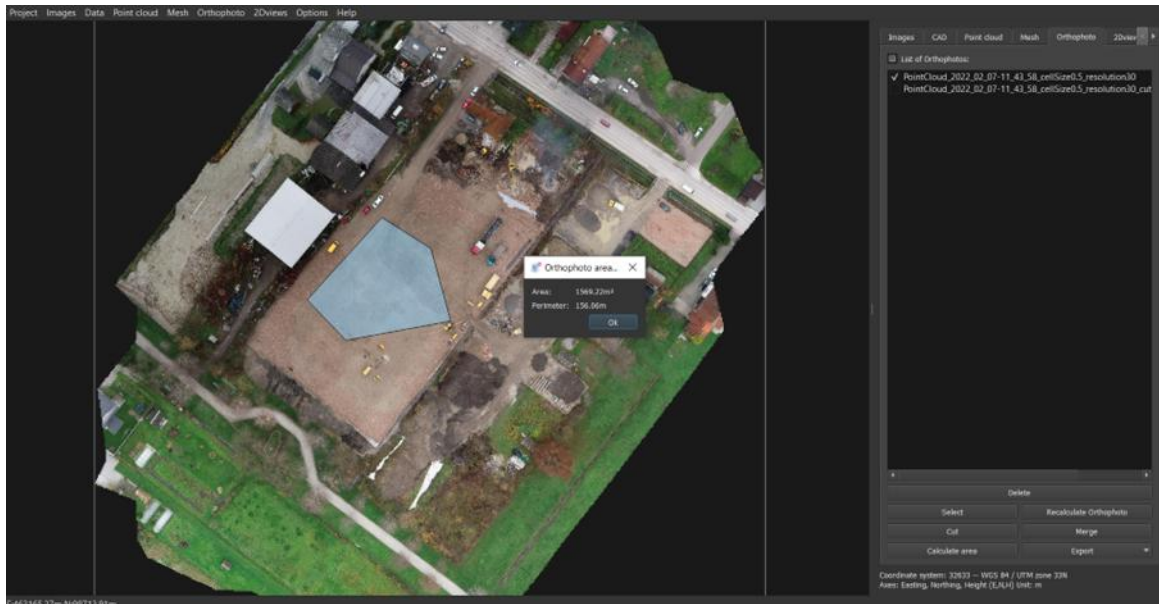


8.6. Delete (PH, S)

Tick DOF data, you would like to delete from application and click **delete button**.

8.7. Orthophoto from a pointcloud (PH, S)

To create an orthophoto from a point cloud, select the desired orthophoto type, between top-down and custom plane. Select the plane if necessary and set the desired resolution. Click on calculate and the system will calculate an orthophoto on the selected point cloud.

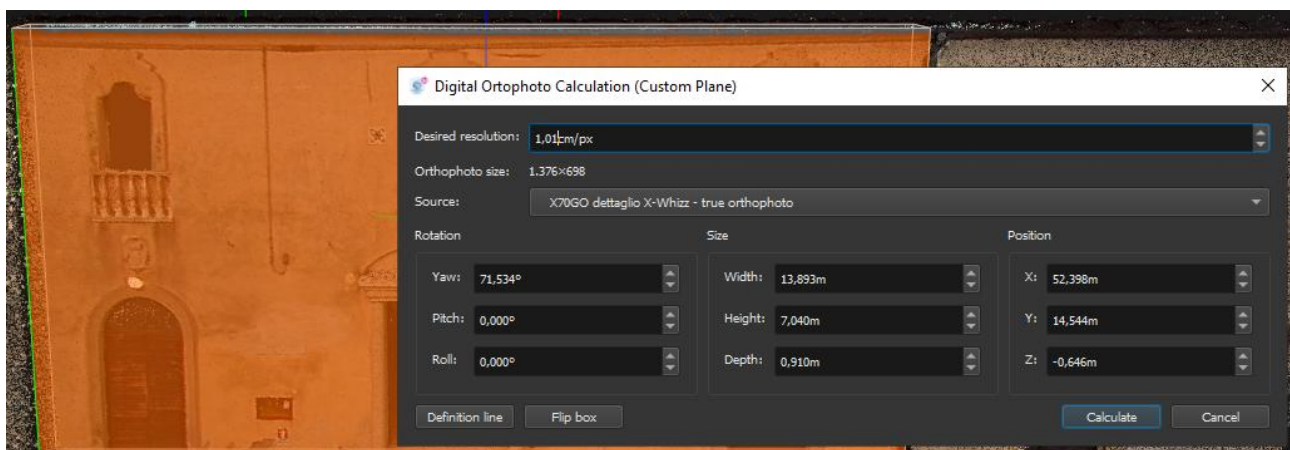


9. CAD Functionalities (PH, S)

There comes a need, when you wish to draw on your point cloud. Draw objects entities that could further be used in Computer aided design (CAD) programs. In **working panel** tab **CAD**. At the top is a working panel tool bar, with **edit tool**, **selecting tool**, **draw line tool** and **draw circle tool**. You can check all layers in the **layer list** on **working panel**. Each layer has its attributes (whether it's **selected**, **visible** or **locked**), **name**, **colour** and **line weight**.

9.1. Preparing layers (PH, S)

As all CAD applications tend to use layers, it is useful, if you first make new layers, assign their colour and line width. Click **+** to make new layer. To change name, double click it. Press enter to confirm. Double click on colour square, to change the colour. Change line weight by double clicking on number. Those layers that are visible, have a scheme  in the second row, as oppose to nonvisible ones . At the time, only one layer can be selected, in the second row  is visible, as oppose to all the others . Third row shows whether layer is **locked**  or **unlocked** . To change any of layers attributes, click on unwanted scheme in desired row of layer.

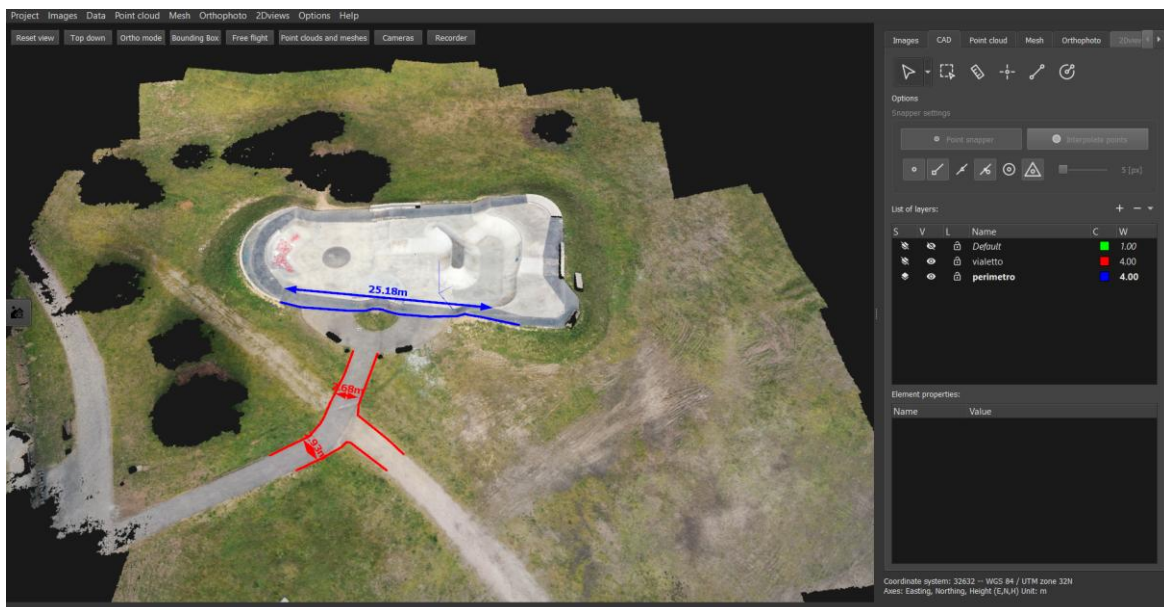

9.2. Select tool (PH, S)

Use **select tool**  to select multiple drawn CAD objects. By selecting from left to right, you can select different points.

- when you draw selection from **right to left**, all objects, of which parts were inside selection are selected.
- when you draw selection from **left to right**, you will select only those objects, of which all parts are being selected.

9.3. Draw point (PH, S)

To draw set the desired layer and select **draw point tool** . Go to **snapper settings** and **tool settings** to select type of snapping and display settings. If you want to snap directly on point cloud point, select **point snapper**. This option supports also snapping on endpoints, midpoints and on or near existing lines. Each point can have displayed name, height and code. Size of displayed text and code value can be specified.



9.4. Draw line (PH, S)


To draw set the desired layer and select **draw line** tool . Second, click on **snapper settings** to select type of snapping and **measurements display**. If you want to snap directly on point cloud point, select **point snapper**. This option supports also snapping on endpoints, midpoints and on or near existing lines.

2nd option is to draw the line by creating new points – this option is useful in case you don't have a certain point cloud point to draw on – in this case **interpolate points** and select desired radius of **point snapper** to define the average height (at least one point of the point cloud needs to be in the blue circle) of the new point which will be created in the centre of the mouse cross. You can select different parameters to be shown in the drawing in the **Show** section.




Start drawing lines, using **left mouse click**. If you mis-clicked use **backspace**, to delete last point. Abort drawing at any point with **escape** button. End drawing polygon of lines using **right mouse click**.

If you want to end drawing polygon on already drawn point, select to **use element snapper** an approach desired point with your cursor. As snapper is active, already drawn element/elements will mark. Click at desired point with left mouse click and continue to draw. You can change **snapper settings** while drawing CAD objects.

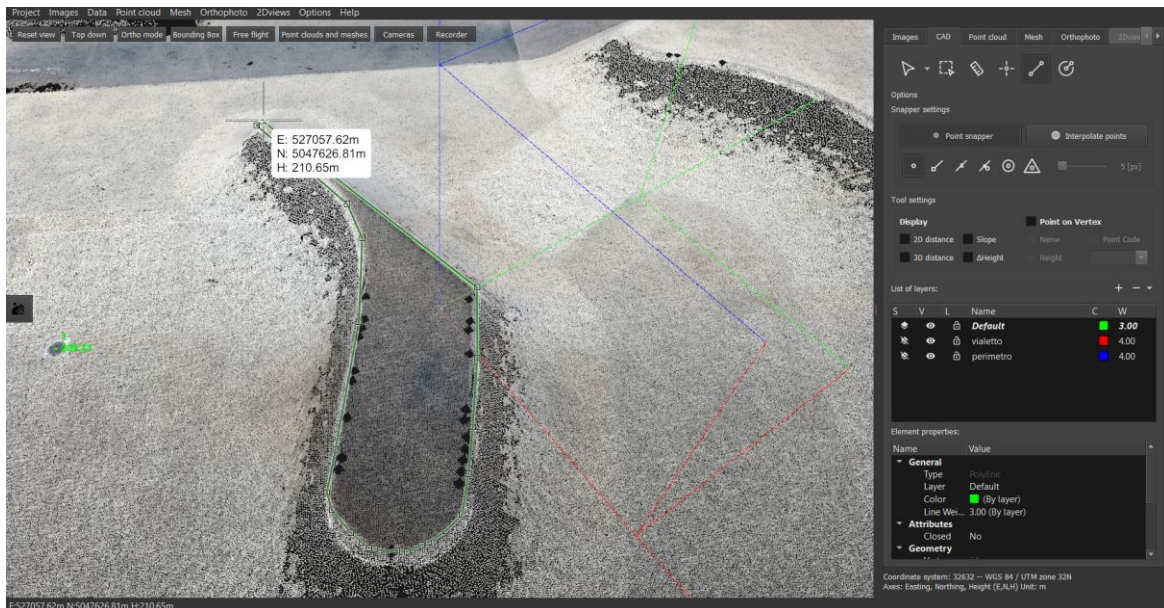

9.5. Draw circle (PH, S)

To draw a circle, select **draw circle** tool  and desired layer. Select type of snapping, and snapping zone. Left click circles base point, drag mouse to assign diameter, confirm with left mouse click. Use right *mouse click* as well as escape button to abort drawing.

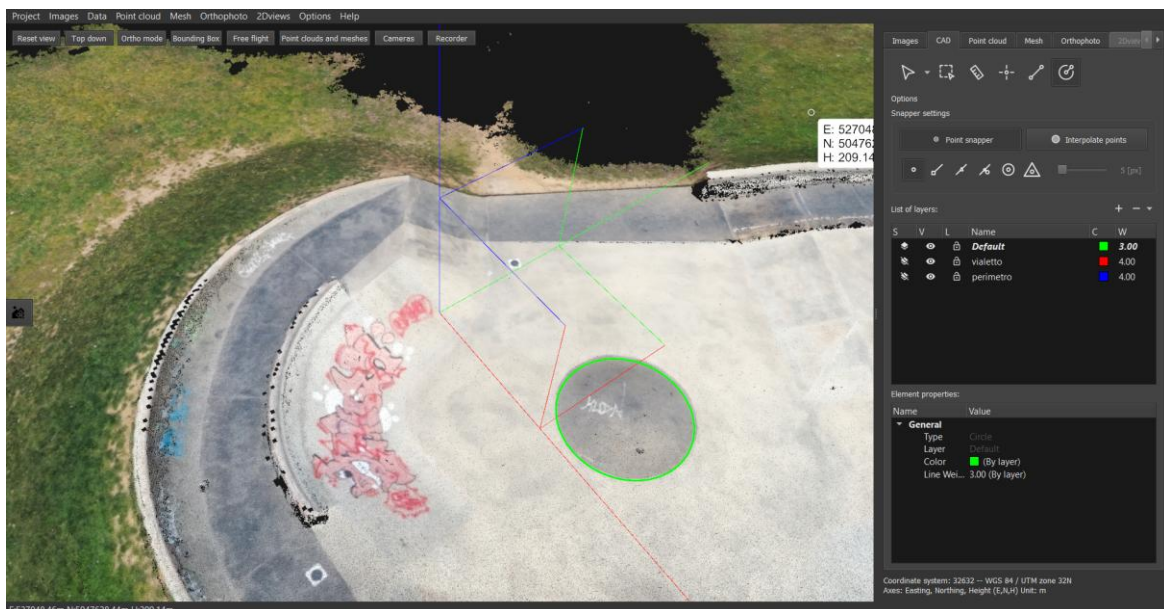

9.6. Measure tool (PH, S)

To measure set the desired layer and select **measure** tool . Second, click on **snapper settings** to select type of snapping. If you want to snap directly on point cloud point, select **point snapper**. This option supports also snapping on endpoints, midpoints and on or near existing lines. Left mouse click on the first end of measurement and then on second. You can select the type of measurement to show between distance (2D or 3D), slope, elevation difference (Δ Height) or azimuth. Click **esc** to exit or continue measuring.



9.7. Edit tool (PH, S)

To edit drawing, select **edit** tool  and get close to desired objects. When marked, select it with *left mouse* click. You can move, redraw or delete selected points or objects. Click on the drop down button of **edit** tool and click on:

- **select similar** to select same CAD object drawn on all layers.
- **select similar on same layer** to select all CAD objects on layer of selected object.



All data of selected object or layer are displayed in **Element properties** window of **working panel**. There you can change its **colour**, **line type** or **layer** by clicking on desired attribute and change it from available possibilities.

S	V	L	Name	C	W
			Default		3.00
			violetto		4.00
			perimetro		4.00

9.8. Photo-assisted CAD drawing tool (PH)

Draw with CAD tools directly on images, for more precise point selection, directly on the sparse point cloud (no need to reconstruct the dense point cloud!). It is also easier than drawing on a mesh.

Select a CAD layer and start selecting a point; the photo drawing menu will appear on the left-hand side of the screen.



You can use the slider to adjust the zoom of the images, and the grid icons to select how many photos to display:




Use the photos to position the cursor on the desired point, using the different angles to ensure that the selected position is the correct one.

When selecting a point on the 3D scene, the images with the closest perspective to the viewing position are displayed first.


9.9. Draw on planes (PH, S)

To improve the CAD drawings it is possible to set a custom plane to be able to lock all the drawings to be in the same plane.

First click on Define Plane and select at least one point to define the plane. A yellow plane will be identified. The more complex is the plane the more points will be needed to define it. To define a vertical plane, you need at least three points. Once the plane definition is done, click Confirm plane. The plane will become blue.

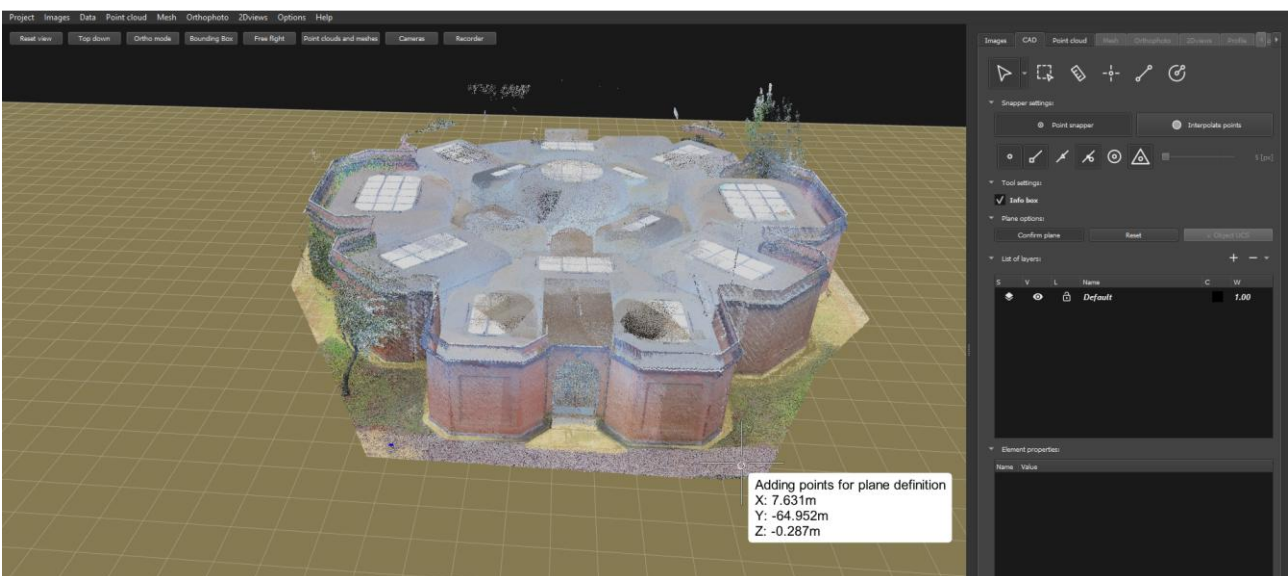

From now on all the points or vectors you are drawing will be projected on the plane.

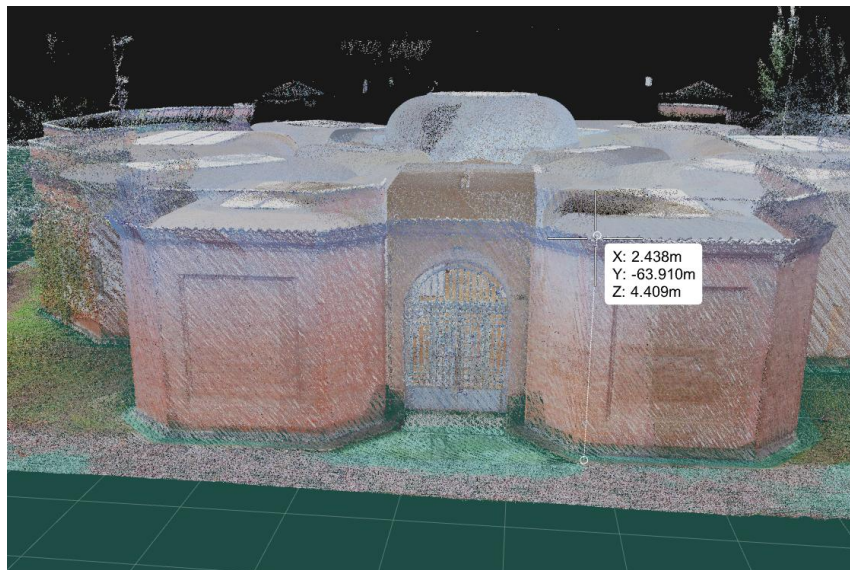

Once a plane is defined, it is also possible to lock the direction of the vector. By clicking Object UCS the vector will be created only in the perpendicular directions of the last vector drawn.

The tool is good to be used in combination with the Top down view and the Ortho mode render of the point cloud. In this visualization from top it is possible to easily draw floor plans or perimeter of buildings.



The plane definition of plane can also be used in combination with panoramic images. First create the plane, second enter in the panoramic image and start to draw. This will improve the accuracy of the drawing.

There are two shortcuts in the keyboard that can be used when dealing with planes.


Hold on Q: will create a local plane based on the height of the point you are selecting. If the Q is not hold the plane will be resetted.

Press F8: will turn on and turn off the Object UCS tool.


9.10. Clipping with CAD (PH, S)

It is possible to cut out point clouds, meshes and orthophotos using a polygon drawn in CAD as a base. You can either draw the line in Cube-3D or import one already drawn in other software.

After drawing the line, select the element you wish to crop, right-click and select **Clip**.

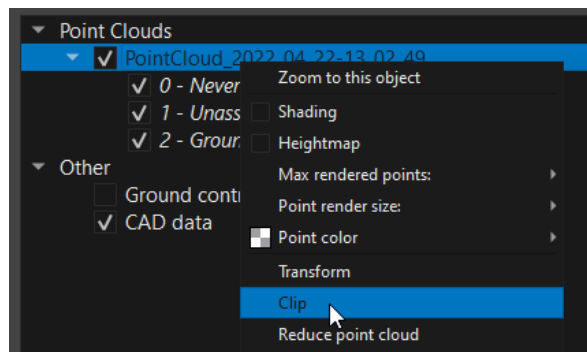

Select the layer where the clipping line is located and click compute.

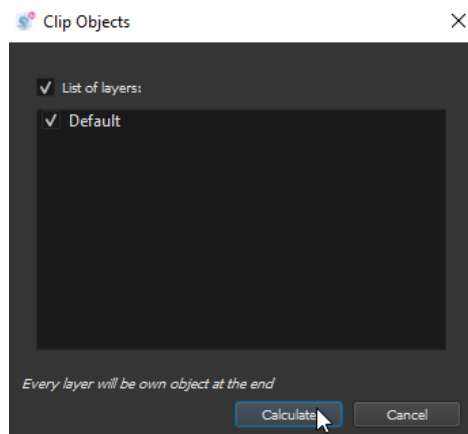


The software will automatically calculate a copy of the object, cropped to the edges of the CAD line.




10. Recorder function (PH, S)

Sometimes you wish to make video presentation of point cloud and measurements made on it. Click **Recordings** button in the viewer. A Video recorder with instructions pops up.

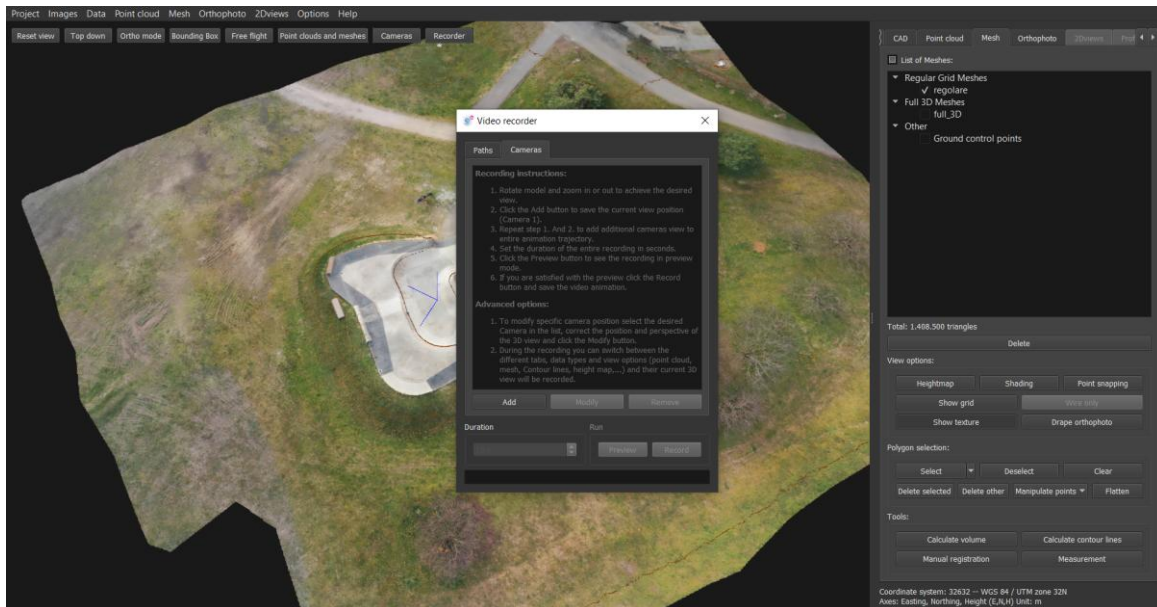


As described, you need to rotate/move/zoom to desired start point and click **Add** button to create first recording camera. Proceed throe entire area, creating new cameras to capture desired details. A recording trajectory appears between selected camera positions. Define desired time of recording duration.

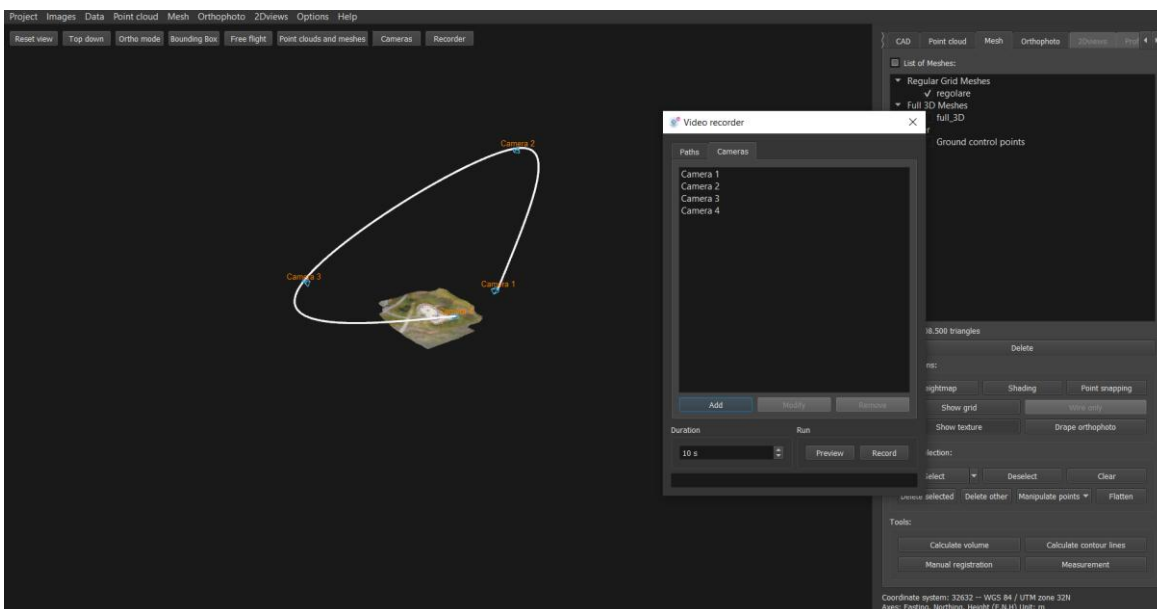

Click **preview** to preview flight and it's duration. By clicking on a camera from list, you can remove or modify it. When you click modify, cameras position is moved to current viewpoint. Add new ones if pleased. Remember, you will display types of data and measurements once you record. Once you created desired path of needed duration, click **Record**.

Video export setting window pops up, where you need to set the path and name of saved recording in mp4 format. Adjust Frame rate and bitrate if desired. Select weather you want watermark in the recording. Once set, click **Confirm** to start recording.

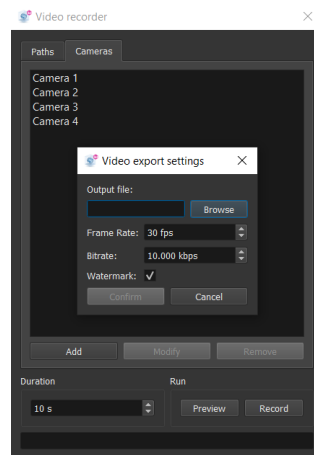


As recording is following desired path, change displayed data by switching between **CAD**, **Point Cloud**, **DSM**, **Profile**, **Contour lines** and **Volumes** from Working panel. Switch between Viewing options to achieve desired effect. Once you are viewing point cloud, you can also display it with dsm. When you are viewing dsm, you can display it with point cloud as well as drape orthophoto on it. When switching viewed data, observe recording bar, so, that all data is displayed in desired proportions of time! Once the recording has completed, close Video recording window.

11. Reports (PH, S)


Generating a general project report and/or measurements report, is basically in a few clicks and the report is done. General report contains information about imported/processed images, geo-referencing, camera positions, flight characteristics, calculated accuracy, GCP positions, orthophotos, DSMs, error summary. With measurements report you get the ability to include all your calculated data, profile lines details, volume and stockpile measurements, and contour lines.

11.1. General report (PH)

To create a general report, click **Project** - > **Generate report** - > **General report**.

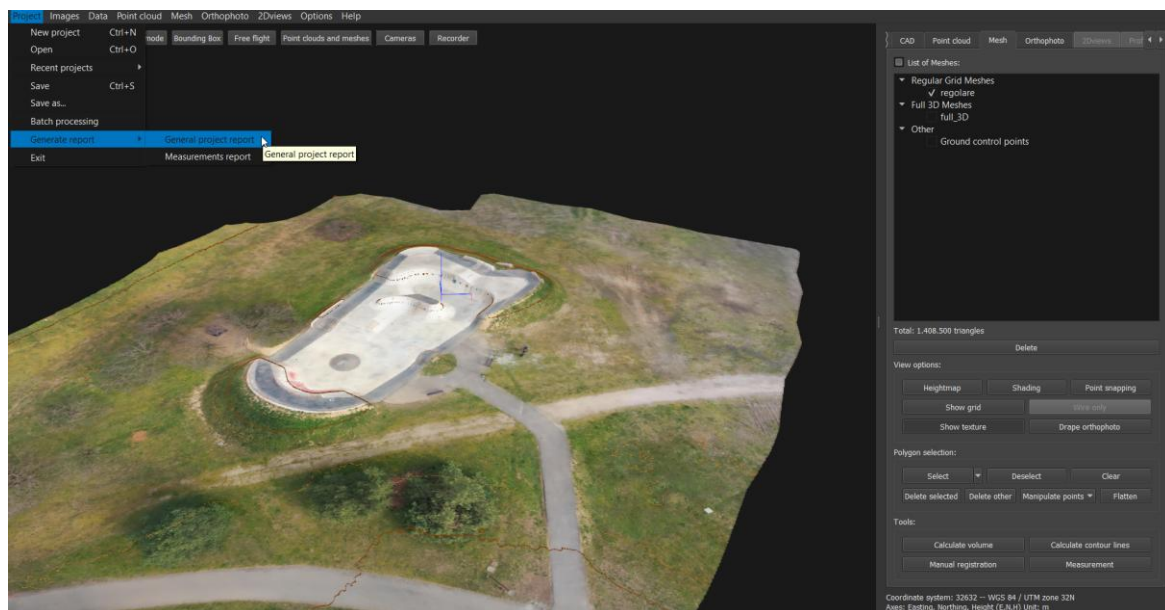

Enter the document's name and select the data you want included in the report. If not, Cube-3d automatically selects top listed data from all working panel tabs.

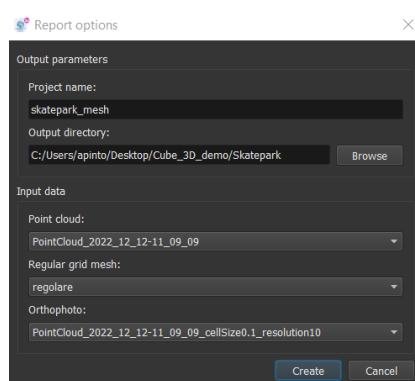

After the report is generated, the folder with report file path pops up for you to verify the information. It is created in *.docx file which makes it easily customizable. Simply save it as pdf in your text editor if needed.

Here is a quick overview of a general project report.


Report

Project:		skatepark_mesh		
Date of image acquisition:		2022-03-16		
Camera model	Resolution	Focal length	Sensor size	Pixel size
Hasselblad L1D-20c	5472 × 3648	10.26mm	13.2 × 8.8 mm	2.412µm
Orthophoto size:	112.9m × 100.8m	Pixel resolution:	0.010m	



Survey Data

Number of images:	40	Number of registered images:	40
Flying altitude:	40.9m	Number of key points per images / average:	1061
Ground resolution:	0.0098m	Georeferencing:	Yes

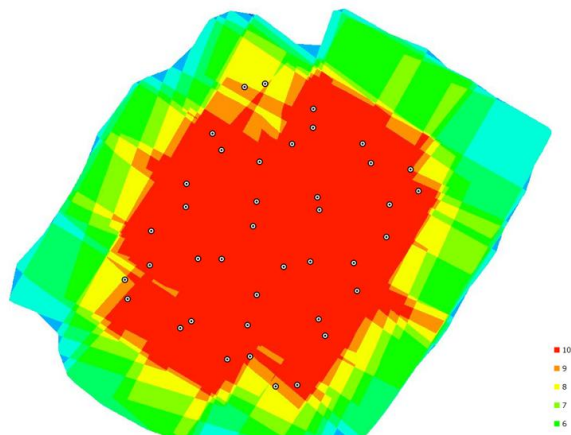


Camera Parameters


Camera:	Hasselblad L1D-20c		
Focal length (f):	4413.89px	Radial distortion (k1):	0.012169
Principal point X (ppx):	2718.64px	Radial distortion (k2):	0.018811
Principal point Y (ppy):	1784.30px	Radial distortion (k3):	-0.019862
Tangential distortion (t1):	-0.001011	Tangential distortion (t2):	-0.000640

11.2. Measurement report (PH, S)

To create Measurements report, click **Project** - > **Generate report** - > **Measurements report**.

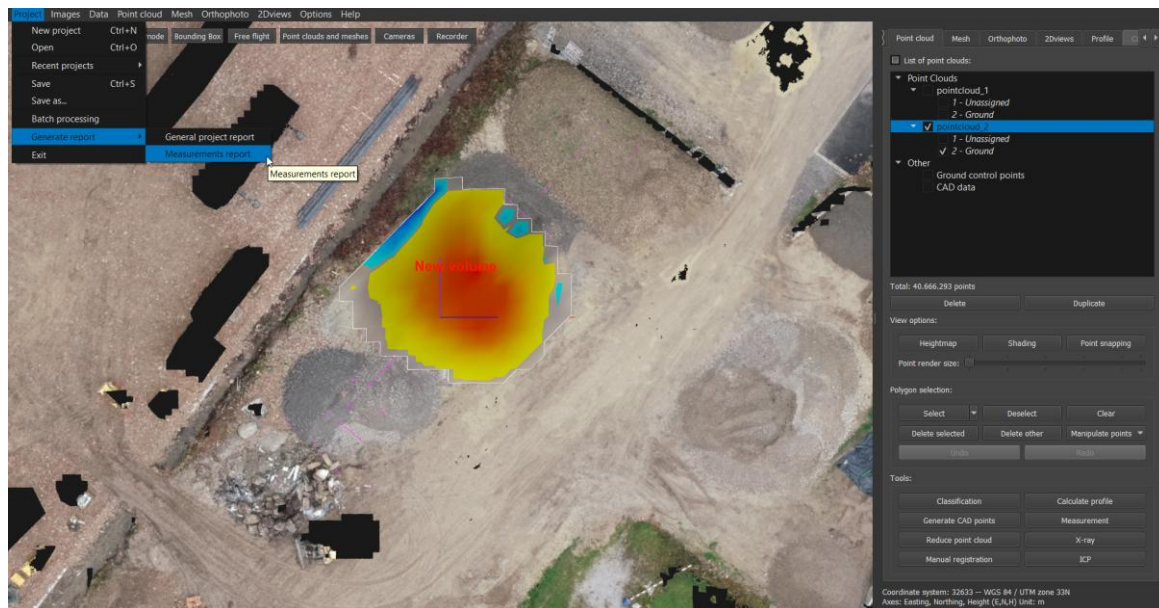

Enter the document's name and select the data you want to have included in the report. If not, Cube-3d automatically selects top listed data from all working panel tabs.

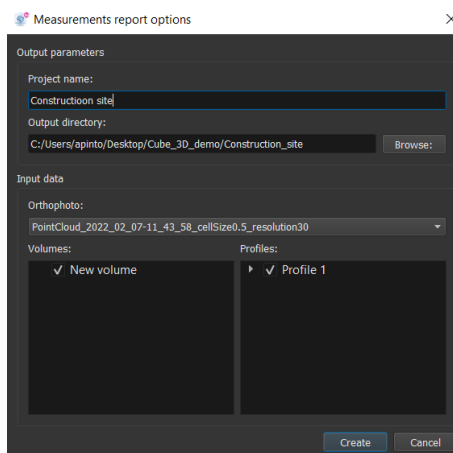

After the report is generated, the folder with report file path pops up for you to verify the information. It is created in *.docx file which makes it easily customizable. Simply save it as pdf in your text editor if needed.

Here below is a quick overview of a measurements report.

Volume

Name:	New volume		
Fill:	111.12m ³	2D area:	168.50m ²
Cut:	0.93m ³	3D area:	183.55m ²
Net:	110.19m ³	Lowest point:	287.99m
		Highest point:	290.42m



Profile line with transverse lines



Profile names:	Profile 1		
Lowest point:	288.082m	Length of profile:	34.948m
Highest point:	291.252m	XZ scale:	1:1

Longitudinal profiles - 2D break point coordinates	E [m]	N [m]
T1 (Profile 1)	463195.533	98688.950
T2 (Profile 1)	463202.060	98695.792
T3 (Profile 1)	463213.384	98708.374
T4 (Profile 1)	463219.282	98714.586

Transverse profiles - 2D break point coordinates	Start E [m]	Start N [m]	End E [m]	End N [m]
Profile 1 (distance 0.00)	463193.363	98691.021	463197.704	98686.880
Profile 1 (distance 3.00)	463195.434	98693.192	463199.775	98689.050
Profile 1 (distance 6.00)	463197.504	98695.362	463201.846	98691.221
Profile 1 (distance 9.00)	463199.575	98697.533	463203.917	98693.391
Profile 1 (distance 12.00)	463201.533	98699.690	463205.992	98695.676
Profile 1 (distance 15.00)	463203.540	98701.920	463207.999	98697.906
Profile 1 (distance 18.00)	463205.546	98704.150	463210.006	98700.136
Profile 1 (distance 21.00)	463207.553	98706.380	463212.013	98702.366
Profile 1 (distance 24.00)	463209.560	98708.610	463214.020	98704.596
Profile 1 (distance 27.00)	463211.633	98710.887	463215.985	98706.756
Profile 1 (distance 30.00)	463213.699	98713.063	463218.050	98708.932
Profile 1 (distance 33.00)	463215.764	98715.238	463220.116	98711.107



STONEX® SRL

Viale dell'Industria, 53 - 20037 Paderno Dugnano (MI)

Tel: +39 02 78619201

www.stonex.it | info@stonex.it